

KLAS

Mc Carran Intl


KSFO

San Francisco Intl

2024/05/11 0311Z

KLAS SHADO J110 CZQ V23 EBTUW KSFO

366.67 nm / 679.08 km

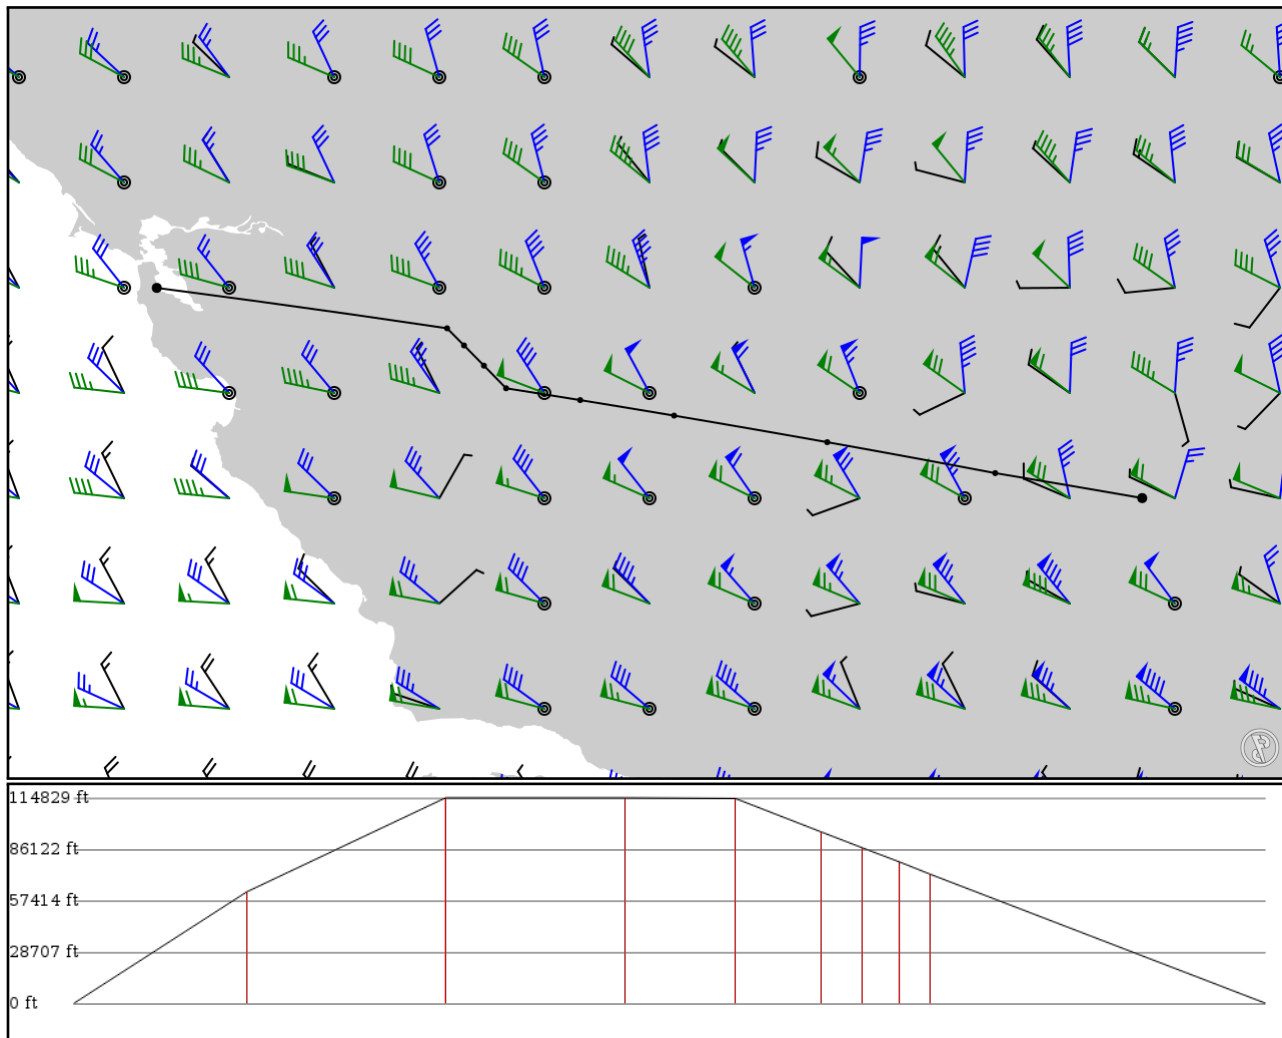

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAS APT	-	36.08097 -115.15345	0 ft 0 m	-	Mc Carran Intl
SHADO FIX	-	36.26374 -116.23077	19,000 ft 5,791 m	53	-
FURNY FIX	J110 AWY-HI	36.49013 -117.46168	35,000 ft 10,668 m	61	-
MITEL FIX	J110 AWY-HI	36.68442 -118.58408	35,000 ft 10,668 m	55	-
PINNI FIX	J110 AWY-HI	36.79783 -119.27202	34,900 ft 10,638 m	33	-
CZQ VOR	J110 AWY-HI	36.88433 -119.81514	29,200 ft 8,900 m	26	CLOVIS VORTAC
BEREN FIX	V23 AWY-LO	37.04981 -119.97747	26,500 ft 8,077 m	12	-
LAPOW FIX	V23 AWY-LO	37.19785 -120.12347	24,100 ft 7,346 m	11	-
EBTUW FIX	V23 AWY-LO	37.32313 -120.24755	22,000 ft 6,706 m	9	-
KSFO APT	-	37.61867 -122.37501	0 ft 0 m	102	San Francisco Intl

KLAS

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 2,180 ft / 664 m
Location: 36.080700 -115.153000
Magnetic Var: 11.048 E

METAR

KLAS 110256Z 02013G19KT 10SM FEW120 FEW180 SCT200 SCT250 26/M04 A2991 RMK A02 SLP108 T02561044 53003

TAF

TAF AMD KLAS 110243Z 1103/1206 35007KT P6SM VCTS SCT100CB SCT150 TEMPO 1103/1104 VRB15G25KT FM110400 34010KT P6SM

Frequencies

REC - 132.40 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.00 MHz - CLEARANCE DELIVERY	GND - 121.10 MHz - LAS VEGAS GROUND
GND - 121.90 MHz - LAS VEGAS GROUND	TWR - 128.80 MHz - LAS VEGAS TOWER
TWR - 118.75 MHz - LAS VEGAS TOWER	TWR - 119.90 MHz - LAS VEGAS TOWER
APP - 125.60 MHz - LAS VEGAS APPROACH	APP - 125.02 MHz - LAS VEGAS APPROACH
DEP - 125.90 MHz - LAS VEGAS DEPARTURE	DEP - 133.95 MHz - LAS VEGAS DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	14,525 ft	89.92	CONCRETE	2,152 ft	0 ft
	46 m	4,427 m	78.87		656 m	0 m
26R	151 ft	14,525 ft	269.95	CONCRETE	1,414 ft	374 ft
	46 m	4,427 m	258.90		431 m	114 m
08R	151 ft	10,535 ft	89.92	CONCRETE	0 ft	381 ft
	46 m	3,211 m	78.87		0 m	116 m
26L	151 ft	10,535 ft	269.94	CONCRETE	0 ft	381 ft
	46 m	3,211 m	258.89		0 m	116 m
01R	151 ft	9,779 ft	24.82	CONCRETE	486 ft	400 ft
	46 m	2,981 m	13.77		148 m	122 m
19L	151 ft	9,779 ft	204.83	CONCRETE	876 ft	394 ft
	46 m	2,981 m	193.78		267 m	120 m
01L	151 ft	8,998 ft	24.82	CONCRETE	584 ft	400 ft
	46 m	2,743 m	13.78		178 m	122 m
19R	151 ft	8,998 ft	204.83	CONCRETE	0 ft	0 ft
	46 m	2,743 m	193.78		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICUA	110.10 MHz	18 nm	-	-	2,092 ft
				33 km	-		2,092 m
26R	DME	ILAS	110.30 MHz	18 nm	-	-	2,203 ft
				33 km	-		2,203 m
01L	LOC-ILS	ICUA	110.10 MHz	18 nm	24.83	-	2,180 ft
				33 km	13.78		2,180 m
26L	LOC-ILS	IRLE	111.50 MHz	18 nm	269.93	-	2,180 ft
				33 km	258.88		2,180 m
26R	LOC-ILS	ILAS	110.30 MHz	18 nm	269.94	-	2,180 ft
				33 km	258.89		2,180 m
01L	GS	ICUA	110.10 MHz	10 nm	24.83	3.40	2,180 ft
				19 km	13.78		2,180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	GS	IRLE	111.50 MHz	10 nm	269.93	3.00	2,180 ft
				19 km	258.88		2,180 m
26R	GS	ILAS	110.30 MHz	10 nm	269.94	3.00	2,180 ft
				19 km	258.89		2,180 m

KSFO

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 13 ft / 4 m
Location: 37.618500 -122.375000
Magnetic Var: 12.843 E

METAR

KSFO 110256Z 31012KT 10SM CLR 20/08 A2989 RMK A02 SLP122 T02000078 53000

TAF

TAF AMD KSFO 110300Z 1103/1206 31012KT P6SM SKC FM110500 28008KT P6SM SKC FM111400 32004KT P6SM SCT010 FM112100 31012KT

Frequencies

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.05		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.05		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.07		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.87		0 m	136 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m