

# KJFK

John F Kennedy Intl


# KCZG

TRI CITIES

2024/05/22 0402Z

KJFK SAX KCZG

135.75 nm / 251.41 km

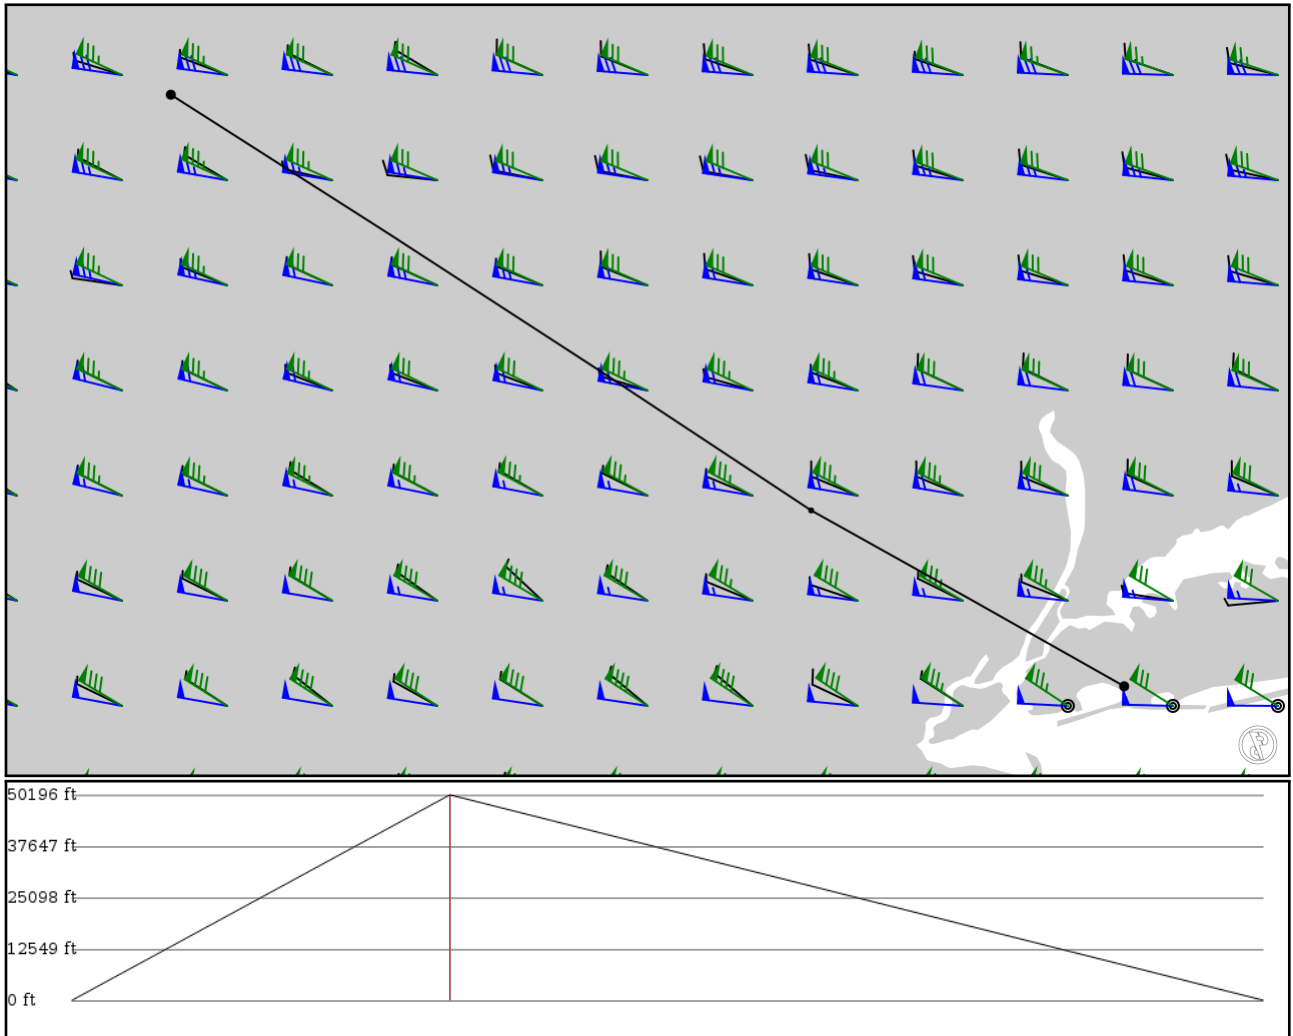

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KJFK	-	40.63990	0 ft	-	John F Kennedy Intl
APT	-	-73.77666	0 m		
SAX	-	41.06756	15,300 ft	43	SPARTA VORTAC
VOR	-	-74.53831	4,663 m		
KCZG	-	42.07854	0 ft	92	TRI CITIES
APT	-	-76.09633	0 m		

## KJFK

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 12 ft / 4 m  
Location: 40.640100 -73.776500  
Magnetic Var: 12.819 W

## METAR

KJFK 220251Z 15003KT 10SM BKN250 17/16 A2996 RMK AO2 SLP145 T01720156 50002

## TAF

TAF AMD KJFK 220228Z 2202/2306 20005KT P6SM FEW250 FM221400 18010KT P6SM SKC FM221800 17012KT P6SM FEW040 FEW250 F

## Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.48		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.49		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm 33 km	- -	-	13 ft 13 m
31R	DME	IRTH	111.50 MHz	18 nm 33 km	- -	-	13 ft 13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm 33 km	30.68 43.50	-	12 ft 12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm 33 km	30.67 43.49	-	12 ft 12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm 33 km	120.87 133.69	-	12 ft 12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm 33 km	210.67 223.49	-	12 ft 12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm 33 km	210.68 223.50	-	12 ft 12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm 33 km	300.84 313.66	-	12 ft 12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm 33 km	300.87 313.69	-	12 ft 12 m
04L	GS	IHIQ	110.90 MHz	10 nm 19 km	30.68 43.50	3.00	12 ft 12 m
04R	GS	IJFK	109.50 MHz	10 nm 19 km	30.67 43.49	3.00	12 ft 12 m
13L	GS	ITLK	111.50 MHz	10 nm 19 km	120.87 133.69	3.00	12 ft 12 m
22L	GS	IIWY	110.90 MHz	10 nm 19 km	210.67 223.49	3.00	12 ft 12 m
22R	GS	IJOC	109.50 MHz	10 nm 19 km	210.68 223.50	3.00	12 ft 12 m
31L	GS	IMOH	111.35 MHz	10 nm 19 km	300.84 313.66	3.00	12 ft 12 m
31R	GS	IRTH	111.50 MHz	10 nm 19 km	300.87 313.69	3.00	12 ft 12 m