


2024/05/03 1706Z

OJJR PARAM **R652** GRY **UN318** VELAL **G669** TOKLU **UP559** RASMO **UL550** VATIM **V45** HFR **UL768** ALVON **UP559**
RATUN **A791** TUGOS OMDB

1145.94 nm / 2122.28 km

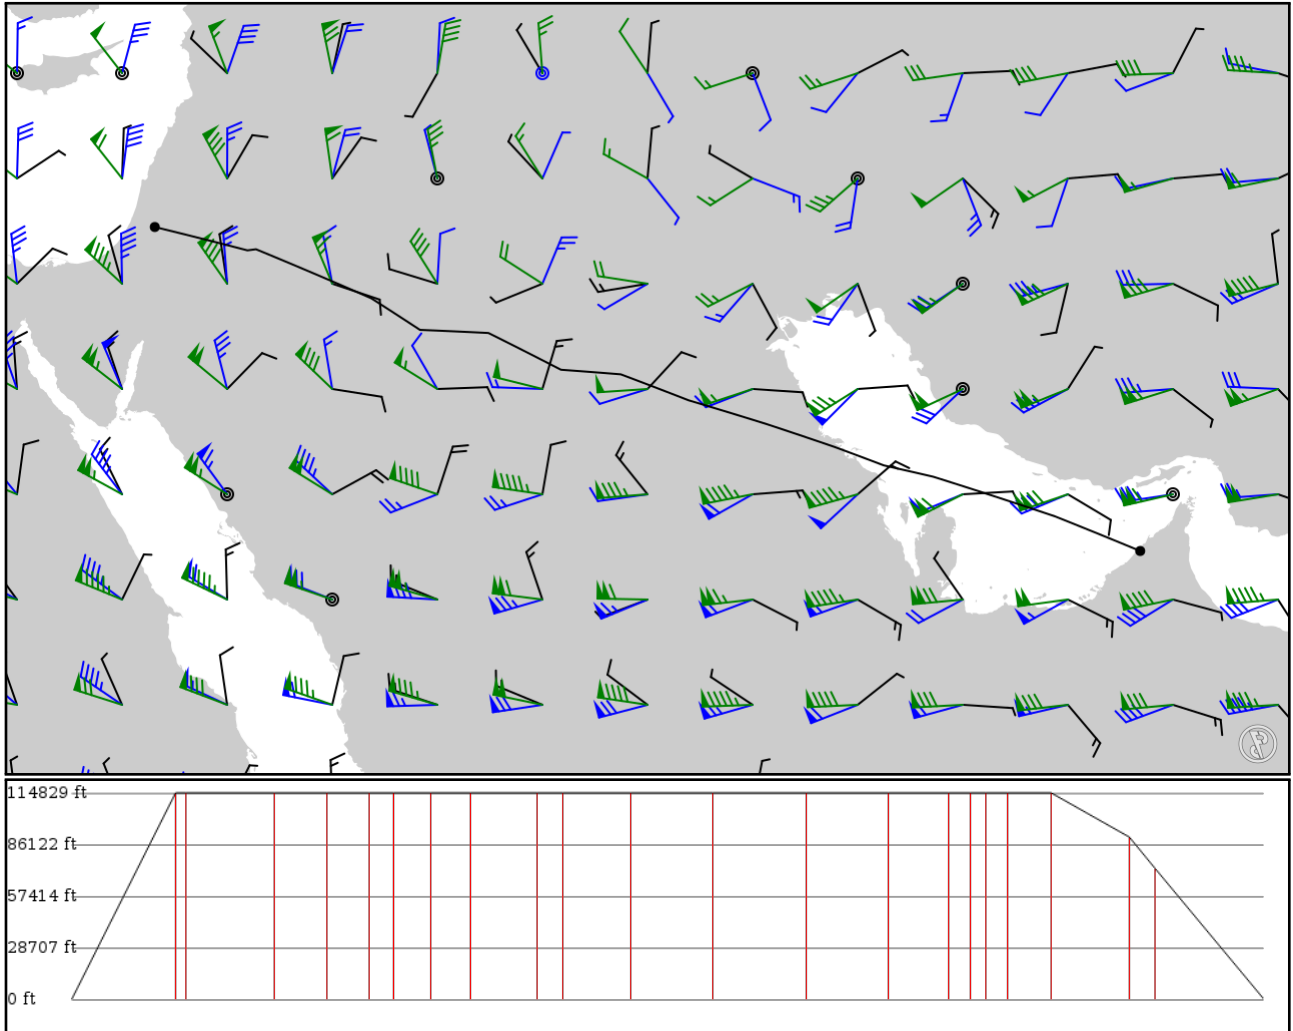

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OJJR	-	31.86656	0 ft	-	JERUSALEM
APT	-	35.21763	0 m		
PARAM	-	31.39000	35,000 ft	100	-
FIX	-	37.11139	10,668 m		
GRY	R652	31.41264	35,000 ft	9	GURIAT VORTAC
VOR	AWY-LO	37.28656	10,668 m		
ORKAS	UN318	30.78944	35,000 ft	85	-
FIX	AWY-HI	38.77139	10,668 m		
NEVOL	UN318	30.41222	35,000 ft	50	-
FIX	AWY-HI	39.64278	10,668 m		
GIBAM	UN318	30.00361	35,000 ft	41	-
FIX	AWY-HI	40.27667	10,668 m		
VELAL	UN318	29.76722	35,000 ft	23	-
FIX	AWY-HI	40.63917	10,668 m		
PAXAN	G669	29.73833	35,000 ft	34	-
FIX	AWY-LO	41.30917	10,668 m		
TOKLU	G669	29.70361	35,000 ft	38	-
FIX	AWY-LO	42.03889	10,668 m		
LUDEP	UP559	29.16278	35,000 ft	64	-
FIX	AWY-HI	43.11278	10,668 m		
RASMO	UP559	28.95361	35,000 ft	24	-
FIX	AWY-HI	43.52194	10,668 m		
VATIM	UL550	28.86000	35,000 ft	64	-
FIX	AWY-HI	44.74528	10,668 m		
HFR	V45	28.33053	35,000 ft	79	HAFR AL-BATIN VORTAC
VOR	AWY-LO	46.12947	10,668 m		
COPPI	UL768	27.84250	35,000 ft	89	-
FIX	AWY-HI	47.73306	10,668 m		
BOXAL	UL768	27.37944	35,000 ft	78	-
FIX	AWY-HI	49.11139	10,668 m		
ALVON	UL768	27.00250	35,000 ft	58	-
FIX	AWY-HI	50.11972	10,668 m		
TOLMO	UP559	26.91778	35,000 ft	20	-
FIX	AWY-LO	50.49083	10,668 m		
MITEX	UP559	26.85667	35,000 ft	14	-
FIX	AWY-LO	50.75972	10,668 m		
RATUN	UP559	26.77028	35,000 ft	20	-
FIX	AWY-LO	51.13306	10,668 m		
IVORI	A791	26.53500	35,000 ft	42	-
FIX	AWY-LO	51.87472	10,668 m		
AMOLI	A791	26.10833	27,500 ft	74	-
FIX	AWY-LO	53.18278	8,382 m		
TUGOS	A791	25.96333	22,200 ft	24	-
FIX	AWY-LO	53.61667	6,767 m		
OMDB	-	25.25491	0 ft	103	DUBAI INTL
APT	-	55.36426	0 m		

OMDB

Region: UNITED ARAB EMIRATES
Timezone: ASIA/DUBAI
Runways: 2

Elevation: 62 ft / 19 m
Location: 25.251100 55.371100
Magnetic Var: 2.352 E

METAR

OMDB 031600Z 35004KT 290V070 CAVOK 29/20 Q1007 NOSIG

TAF

TAF OMDB 031100Z 0312/0418 29012KT 9999 FEW040 BECMG 0316/0318 16005KT BECMG 0408/0410 34014KT

Frequencies

REC - 126.27 MHz - ATIS ARRIVAL	REC - 131.70 MHz - ATIS DEPARTURE
TWR - 126.77 MHz - DUBAI TOWER	TWR - 119.55 MHz - DUBAI TOWER
TWR - 118.75 MHz - DUBAI TOWER	TWR - 119.05 MHz - DUBAI TOWER
GND - 118.35 MHz - DUBAI GROUND	GND - 118.85 MHz - DUBAI GROUND
GND - 121.65 MHz - DUBAI GROUND	CLD - 120.35 MHz - CLEARANCE DELIVERY
APP - 122.50 MHz - MINHAD APPROACH	APP - 126.02 MHz - MINHAD APPROACH
APP - 120.25 MHz - DUBAI ARRIVAL	APP - 124.45 MHz - DUBAI ARRIVAL
APP - 124.90 MHz - DUBAI ARRIVAL	DEP - 126.02 MHz - DUBAI DEPARTURE
DEP - 121.02 MHz - DUBAI DEPARTURE	DEP - 126.20 MHz - DUBAI DEPARTURE
DEP - 120.25 MHz - DUBAI DEPARTURE	APP - 120.40 MHz - DUBAI RADAR
APP - 126.02 MHz - DUBAI RADAR	APP - 127.90 MHz - DUBAI DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	200 ft	14,604 ft	121.53	ASPHALT	2,352 ft	771 ft
	61 m	4,452 m	119.18		717 m	235 m
30L	200 ft	14,604 ft	301.54	ASPHALT	436 ft	0 ft
	61 m	4,452 m	299.19		133 m	0 m
12L	200 ft	14,289 ft	121.48	ASPHALT	1,496 ft	381 ft
	61 m	4,355 m	119.13		456 m	116 m
30R	200 ft	14,289 ft	301.50	ASPHALT	991 ft	377 ft
	61 m	4,355 m	299.15		302 m	115 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	DME	IDBL	110.10 MHz	18 nm	-	-	62 ft
				33 km	-		62 m
30L	DME	IDBW	111.30 MHz	18 nm	-	-	41 ft
				33 km	-		41 m
30R	DME	IDBR	110.90 MHz	18 nm	-	-	44 ft
				33 km	-		44 m
12L	LOC-ILS	IDBL	110.10 MHz	18 nm	121.49	-	62 ft
				33 km	119.14		62 m
12R	LOC-ILS	IDBE	109.50 MHz	18 nm	121.54	-	62 ft
				33 km	119.19		62 m
30L	LOC-ILS	IDBW	111.30 MHz	18 nm	301.54	-	62 ft
				33 km	299.19		62 m
30R	LOC-ILS	IDBR	110.90 MHz	18 nm	301.49	-	62 ft
				33 km	299.14		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	GS	IDBL	110.10 MHz	10 nm	121.49	3.00	62 ft
				19 km	119.14		62 m
12R	GS	IDBE	109.50 MHz	10 nm	121.54	3.00	62 ft
				19 km	119.19		62 m
30L	GS	IDBW	111.30 MHz	10 nm	301.54	3.00	62 ft
				19 km	299.19		62 m
30R	GS	IDBR	110.90 MHz	10 nm	301.49	3.00	62 ft
				19 km	299.14		62 m