


2024/05/18 0051Z

KMEM GANTT V159 VUZ J151 CTY V521 LAL V511 SIGNL KMIA

759.57 nm / 1406.72 km

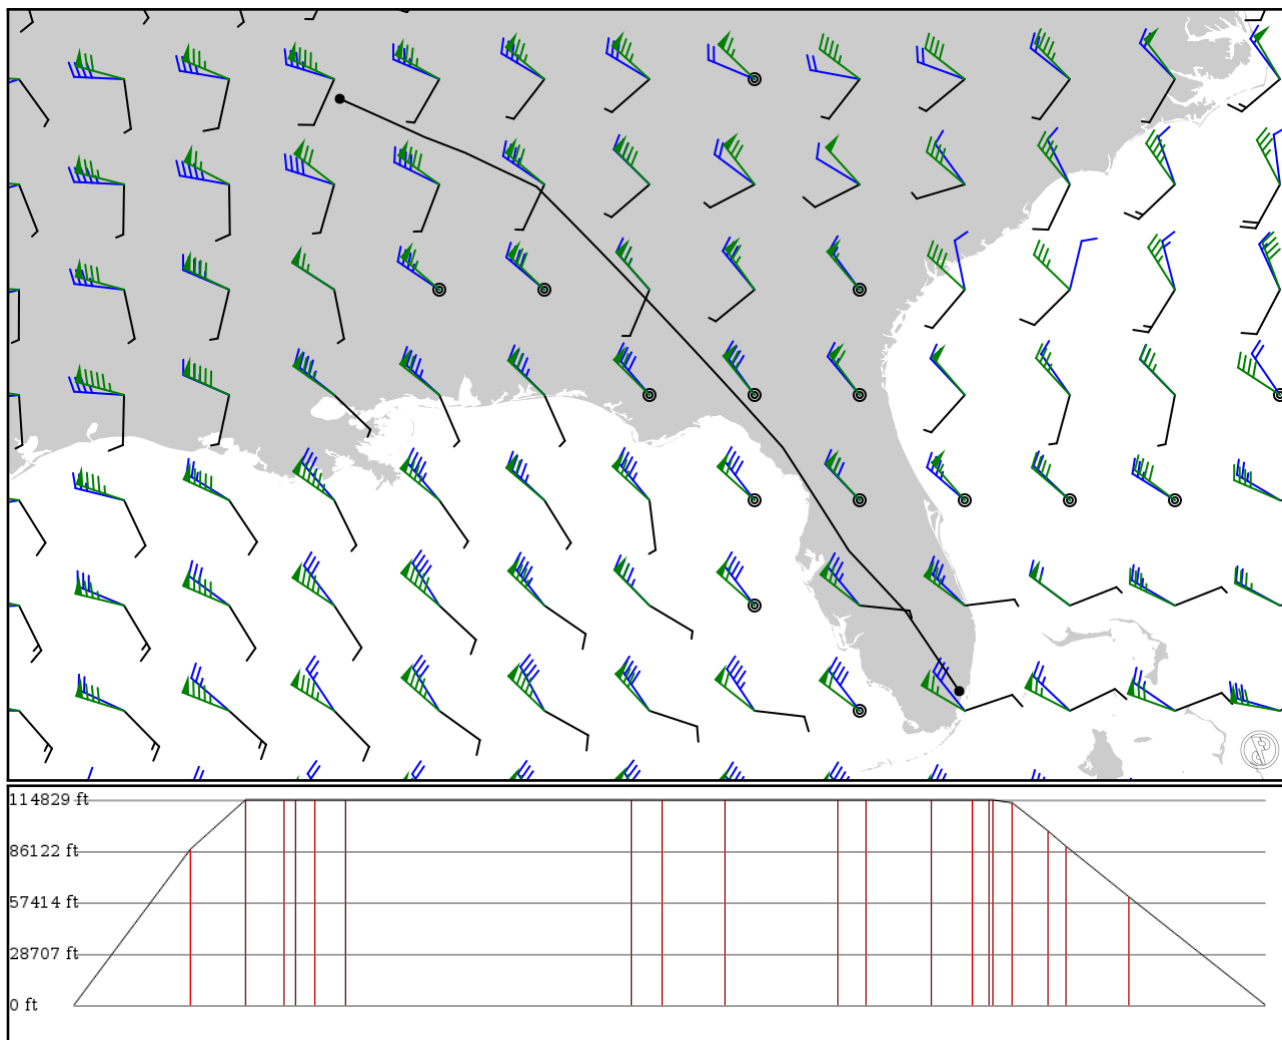

## Notes

Basic altitude profile:

- Ascent Rate: 1500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 30000ft
- Cruise Speed: 270kts
- Descent Rate: 1000ft/min
- Descent Speed: 200kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KMEM APT	-	35.04267 -89.97663	0 ft 0 m	-	MEMPHIS INTL
GANTT FIX	-	34.44507 -88.64928	26,600 ft 8,108 m	74	-
HAB VOR	V159 AWY-LO	34.19878 -88.01161	35,000 ft 10,668 m	34	HAMILTON VORTAC
EXIST FIX	V159 AWY-LO	33.99376 -87.58149	35,000 ft 10,668 m	24	-
CHOOK FIX	V159 AWY-LO	33.93462 -87.45595	35,000 ft 10,668 m	7	-
CORES FIX	V159 AWY-LO	33.83533 -87.24353	35,000 ft 10,668 m	12	-
VUZ VOR	V159 AWY-LO	33.67014 -86.89983	35,000 ft 10,668 m	19	VULCAN VORTAC
WYATT FIX	J151 AWY-HI	31.32290 -84.62511	35,000 ft 10,668 m	182	-
NEDDY FIX	J151 AWY-HI	31.06415 -84.38378	35,000 ft 10,668 m	19	-
CAPPS FIX	J151 AWY-HI	30.54533 -83.90498	35,000 ft 10,668 m	39	-
CTY DME	J151 AWY-HI	29.59900 -83.04879	35,000 ft 10,668 m	72	CROSS CITY VORTAC
ORATE FIX	V521 AWY-LO	29.34042 -82.88022	35,000 ft 10,668 m	17	-
NITTS FIX	V521 AWY-LO	28.74151 -82.49392	35,000 ft 10,668 m	41	-
DADES FIX	V521 AWY-LO	28.36267 -82.25217	35,000 ft 10,668 m	26	-
JUVAS FIX	V521 AWY-LO	28.20294 -82.15084	35,000 ft 10,668 m	10	-
PLUMY FIX	V521 AWY-LO	28.17090 -82.13054	35,000 ft 10,668 m	2	-
LAL VOR	V521 AWY-LO	27.98619 -82.01389	34,500 ft 10,516 m	12	LAKELAND VORTAC
CAVAR FIX	V511 AWY-LO	27.69987 -81.74421	29,700 ft 9,053 m	22	-
HALLR FIX	V511 AWY-LO	27.54467 -81.59883	27,100 ft 8,260 m	12	-
SIGNL FIX	V511 AWY-LO	27.03344 -81.12382	18,500 ft 5,639 m	39	-
KMIA APT	-	25.79617 -80.28974	0 ft 0 m	86	Miami Intl

## KMEM

Region: UNITED STATES  
Timezone: AMERICA/CHICAGO  
Runways: 4

Elevation: 340 ft / 104 m  
Location: 35.042700 -89.976600  
Magnetic Var: 1.981 W

## METAR

KMEM 172354Z 12004KT 10SM FEW065 SCT250 26/18 A2975 RMK A02 SLP072 T02610178 10272 20233 56002

## TAF

TAF KMEM 172338Z 1800/1906 11005KT P6SM VCSH SCT030 BKN045 FM180500 18003KT 6SM BR VCSH FEW015 BKN070 BKN250 FM180

## Frequencies

REC - 127.75 MHz - D-ATIS	COM - 122.95 MHz - MEMPHIS UNICOM
GND - 121.00 MHz - MEMPHIS GROUND	GND - 121.65 MHz - MEMPHIS GROUND
GND - 121.90 MHz - MEMPHIS GROUND	TWR - 118.30 MHz - MEMPHIS TOWER
TWR - 119.70 MHz - MEMPHIS TOWER	TWR - 128.42 MHz - MEMPHIS TOWER
CLD - 125.20 MHz - CLEARANCE DELIVERY	DEP - 124.15 MHz - MEMPHIS DEPARTURE
DEP - 124.65 MHz - MEMPHIS DEPARTURE	APP - 119.10 MHz - MEMPHIS APPROACH
APP - 125.80 MHz - MEMPHIS APPROACH	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
18R	150 ft	9,343 ft	179.00	CONCRETE	0 ft	404 ft
	46 m	2,848 m	180.98		0 m	123 m
36L	150 ft	9,343 ft	359.00	CONCRETE	0 ft	869 ft
	46 m	2,848 m	0.98		0 m	265 m
18C	150 ft	11,148 ft	179.01	CONCRETE	0 ft	404 ft
	46 m	3,398 m	180.99		0 m	123 m
36C	150 ft	11,148 ft	359.01	CONCRETE	0 ft	400 ft
	46 m	3,398 m	0.99		0 m	122 m
18L	150 ft	9,024 ft	179.01	CONCRETE	0 ft	400 ft
	46 m	2,750 m	181.00		0 m	122 m
36R	150 ft	9,024 ft	359.01	CONCRETE	0 ft	400 ft
	46 m	2,750 m	1.00		0 m	122 m
09	150 ft	8,931 ft	91.96	CONCRETE	0 ft	397 ft
	46 m	2,722 m	93.94		0 m	121 m
27	150 ft	8,931 ft	271.98	CONCRETE	0 ft	0 ft
	46 m	2,722 m	273.96		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18L	DME	IEXS	111.15 MHz	18 nm	-	-	341 ft
				33 km	-		341 m
36C	DME	ITSE	110.50 MHz	18 nm	-	-	341 ft
				33 km	-		341 m
36L	DME	IOHN	108.90 MHz	18 nm	-	-	341 ft
				33 km	-		341 m
36R	DME	IMYO	111.35 MHz	18 nm	-	-	341 ft
				33 km	-		341 m
09	LOC-ILS	IMEM	109.50 MHz	18 nm	91.97	-	341 ft
				33 km	93.95		341 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
18C	LOC-ILS	ISDU	111.95 MHz	18 nm	179.01	-	341 ft
				33 km	180.99		341 m
18L	LOC-ILS	IEXS	111.15 MHz	18 nm	179.02	-	341 ft
				33 km	181.00		341 m
18R	LOC-ILS	IOOI	109.90 MHz	18 nm	178.99	-	341 ft
				33 km	180.97		341 m
27	LOC-ILS	IJIM	108.70 MHz	18 nm	271.97	-	341 ft
				33 km	273.95		341 m
36C	LOC-ILS	ITSE	110.50 MHz	18 nm	359.01	-	341 ft
				33 km	0.99		341 m
36L	LOC-ILS	IOHN	108.90 MHz	18 nm	358.99	-	341 ft
				33 km	0.97		341 m
36R	LOC-ILS	IMYO	111.35 MHz	18 nm	359.02	-	341 ft
				33 km	1.00		341 m
09	GS	IMEM	109.50 MHz	10 nm	91.97	3.00	341 ft
				19 km	93.95		341 m
18C	GS	ISDU	111.95 MHz	10 nm	179.01	3.00	341 ft
				19 km	180.99		341 m
18L	GS	IEXS	111.15 MHz	10 nm	179.02	3.00	341 ft
				19 km	181.00		341 m
18R	GS	IOOI	109.90 MHz	10 nm	178.99	3.00	341 ft
				19 km	180.97		341 m
27	GS	IJIM	108.70 MHz	10 nm	271.97	3.00	341 ft
				19 km	273.95		341 m
36C	GS	ITSE	110.50 MHz	10 nm	359.01	3.00	341 ft
				19 km	0.99		341 m
36L	GS	IOHN	108.90 MHz	10 nm	358.99	3.00	341 ft
				19 km	0.97		341 m
36R	GS	IMYO	111.35 MHz	10 nm	359.02	3.00	341 ft
				19 km	1.00		341 m

## KMIA

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 11 ft / 3 m  
Location: 25.796200 -80.289700  
Magnetic Var: 7.275 W

## METAR

KMIA 172353Z 16009G19KT 10SM FEW045 SCT080 BKN250 30/24 A2992 RMK A02 SLP131 T03000244 10333 20300 53006 \$

## TAF

TAF KMIA 172320Z 1800/1906 15012KT P6SM SCT030 BKN060 BKN250 FM180300 VRB04KT P6SM FEW030 FEW250 FM181400 17009KT

## Frequencies

REC - 119.15 MHz - D-ATIS  
COM - 123.00 MHz - UNICOM  
GND - 121.80 MHz - MIAMI GROUND  
TWR - 118.30 MHz - MIAMI TOWER  
APP - 120.50 MHz - MIAMI APPROACH  
APP - 125.75 MHz - MIAMI APPROACH  
DEP - 125.50 MHz - MIAMI DEPARTURE

REC - 133.67 MHz - D-ATIS  
CLD - 135.35 MHz - CLEARANCE DELIVERY  
GND - 127.50 MHz - MIAMI GROUND  
TWR - 123.90 MHz - MIAMI TOWER  
APP - 124.85 MHz - MIAMI APPROACH  
DEP - 119.45 MHz - MIAMI DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.65		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.66		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.65		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.67		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.66		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.67		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.89		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.90		289 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.65		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.88		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.65		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.88		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.64		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.64		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.65		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.88		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.65		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.88		4 m