

CYUL

Montreal Pierre E Trudeau Intl

—


CYRQ

TROIS RIVIERES

2024/05/10 0114Z

CYUL VEPSU CYRQ

69.35 nm / 128.44 km

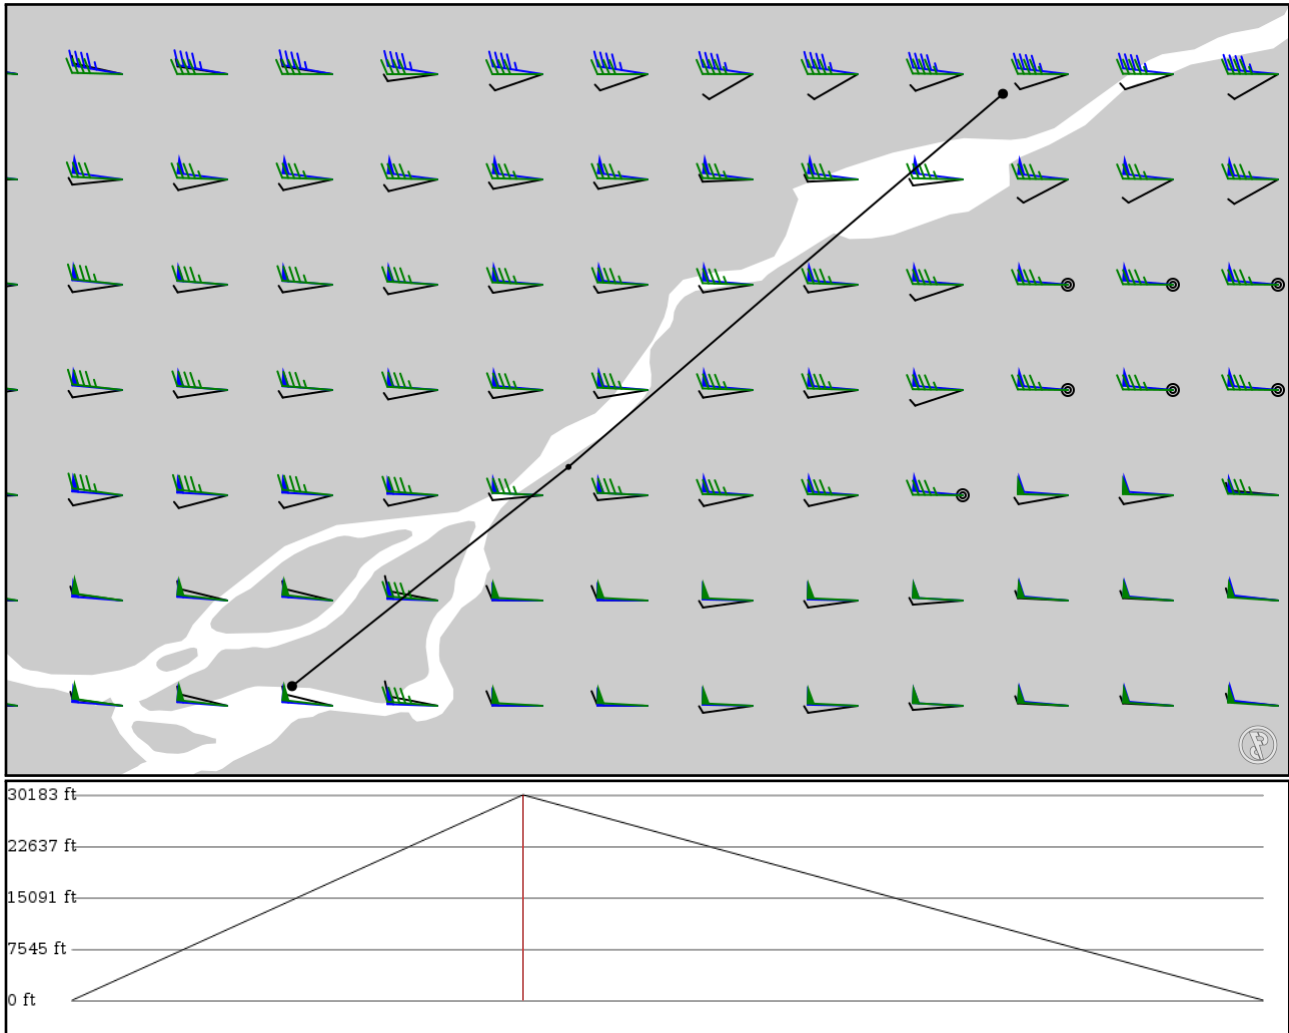

Notes

Basic altitude profile:

- Ascent Rate: 4000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 19000ft
- Cruise Speed: 400kts
- Descent Rate: 2500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
CYUL	-	45.46727	0 ft	-		Montreal Pierre E Trudeau Intl
APT	-	-73.74403	0 m			
VEPSU	-	45.79500	9,200 ft	26	-	
FIX	-	-73.33000	2,804 m			
CYRQ	-	46.35274	0 ft	43		TROIS RIVIERES
APT	-	-72.67944	0 m			

CYUL

Region: CANADA
Timezone: AMERICA/MONTREAL
Runways: 3

Elevation: 118 ft / 36 m
Location: 45.467500 -73.743800
Magnetic Var: 13.897 W

METAR

CYUL 100100Z 04007KT 15SM FEW025 FEW050 BKN100 BKN250 11/06 A2986 RMK CU1SC2AC3CI1 CU TR SLP115

TAF

TAF CYUL 092340Z 1000/1024 03007KT P6SM BKN060 FM100400 04007KT P6SM FEW050 BECMG 1013/1015 04012KT FM102000 0300

Frequencies

TWR - 119.90 MHz - MONTREAL TOWER	TWR - 119.30 MHz - MONTREAL TOWER
TWR - 124.30 MHz - MONTREAL TOWER	GND - 121.00 MHz - MONTREAL GROUND
GND - 121.90 MHz - MONTREAL GROUND	CLD - 125.60 MHz - CLEARANCE DELIVERY
APP - 132.85 MHz - MONTREAL APPROACH	APP - 126.90 MHz - MONTREAL APPROACH
DEP - 124.65 MHz - MONTREAL DEPARTURE	DEP - 120.42 MHz - MONTREAL DEPARTURE
REC - 133.70 MHz - ATIS	REC - 127.50 MHz - ATIS
COM - 123.55 MHz - QUEBEC FIC	COM - 126.70 MHz - QUEBEC FIC
COM - 134.15 MHz - VFR ADVISORY	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	11,010 ft	42.55	ASPHALT	0 ft	0 ft
	60 m	3,356 m	56.45		0 m	0 m
24R	197 ft	11,010 ft	222.57	ASPHALT	0 ft	0 ft
	60 m	3,356 m	236.47		0 m	0 m
06R	197 ft	9,608 ft	42.59	CONCRETE	0 ft	0 ft
	60 m	2,929 m	56.48		0 m	0 m
24L	197 ft	9,608 ft	222.60	CONCRETE	0 ft	0 ft
	60 m	2,929 m	236.50		0 m	0 m
10	197 ft	7,008 ft	87.61	ASPHALT	0 ft	0 ft
	60 m	2,136 m	101.51		0 m	0 m
28	197 ft	7,008 ft	267.63	ASPHALT	0 ft	0 ft
	60 m	2,136 m	281.52		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IUL	109.30 MHz	18 nm	42.57	-	118 ft
				33 km	56.47		118 m
06R	LOC-ILS	IOA	110.50 MHz	18 nm	42.60	-	118 ft
				33 km	56.50		118 m
10	LOC-ILS	IDO	110.10 MHz	18 nm	87.62	-	118 ft
				33 km	101.52		118 m
24L	LOC-ILS	IMQ	110.50 MHz	18 nm	222.60	-	118 ft
				33 km	236.50		118 m
24R	LOC-ILS	IZZ	111.90 MHz	18 nm	222.57	-	118 ft
				33 km	236.47		118 m
06L	GS	IUL	109.30 MHz	10 nm	42.57	3.00	118 ft
				19 km	56.47		118 m
06R	GS	IOA	110.50 MHz	10 nm	42.60	3.00	118 ft
				19 km	56.50		118 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10	GS	IDO	110.10 MHz	10 nm	87.62	3.00	118 ft
				19 km	101.52		118 m
24L	GS	IMQ	110.50 MHz	10 nm	222.60	3.00	118 ft
				19 km	236.50		118 m
24R	GS	IZZ	111.90 MHz	10 nm	222.57	3.00	118 ft
				19 km	236.47		118 m