


2024/05/06 0123Z

ELLX BFS **TG1** KOK EGSS

264.54 nm / 489.93 km

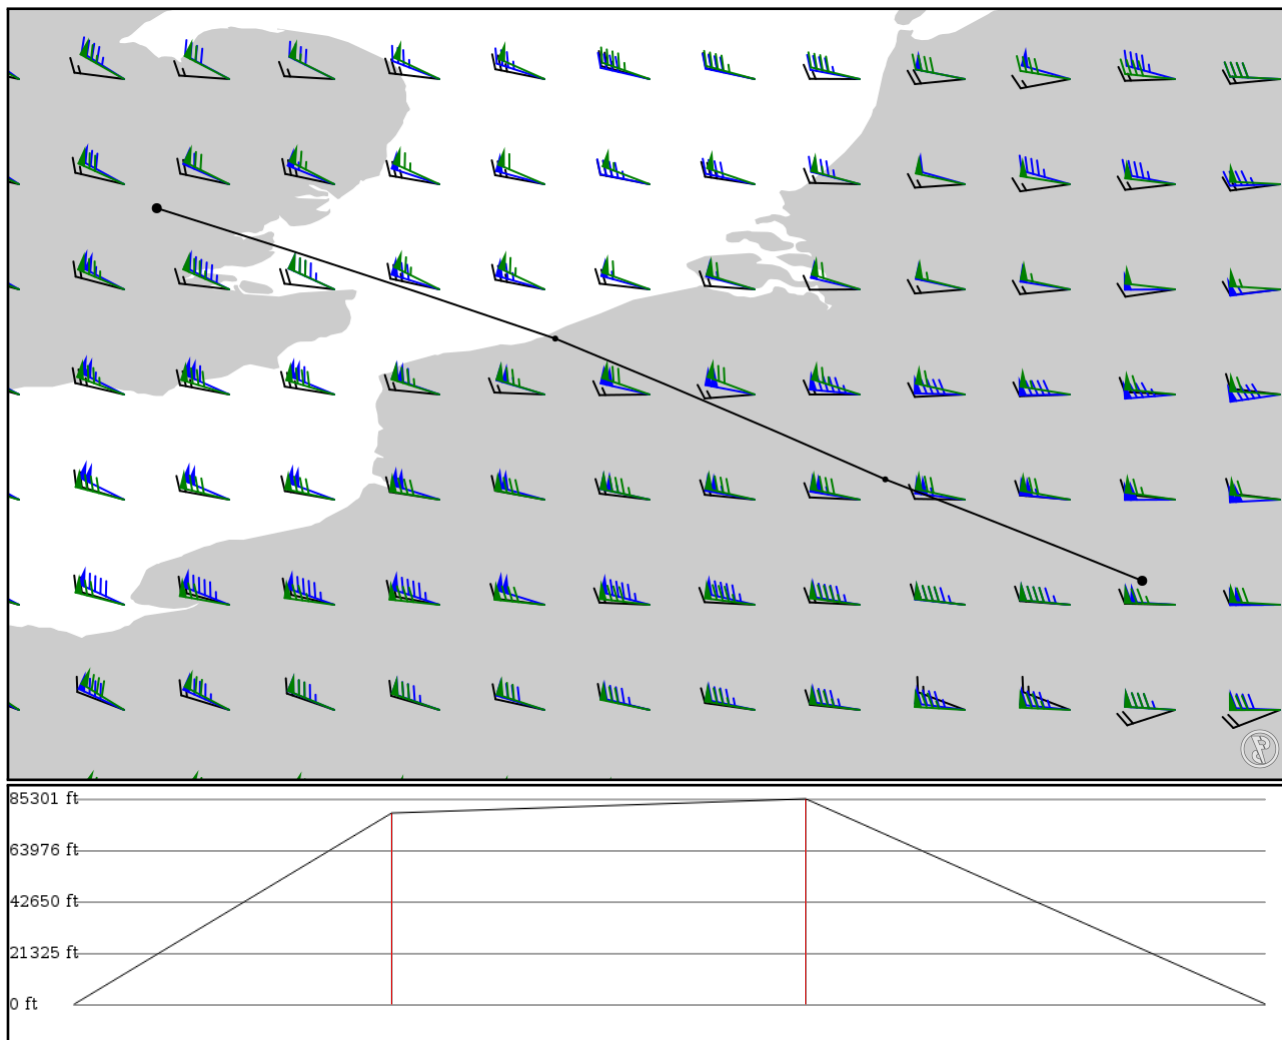

Notes

Basic altitude profile:

- Ascent Rate: 30000ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
ELLX	-	49.62660	0 ft	-	Luxembourg
APT	-	6.21151	0 m		
BFS	-	50.24139	24,200 ft	70	GS
GS	-	4.65306	7,376 m		
KOK	TG1	51.09472	26,000 ft	91	KOKSY VORTAC
VOR	AWY-HI	2.65167	7,925 m		
EGSS	-	51.88510	0 ft	102	London Stansted
APT	-	0.23496	0 m		

ELLX

Region: LUXEMBOURG

Timezone: EUROPE/LUXEMBOURG

Runways: 1

Elevation: 1,234 ft / 376 m

Location: 49.626500 6.211590

Magnetic Var: 2.526 E

METAR

ELLX 060050Z AUTO 14004KT 120V180 9999 -SHRA BKN003/// BKN004/// OVC006/// 12/12 Q1007 NOSIG

TAF

TAF ELLX 052300Z 0600/0706 14003KT CAVOK BECMG 0601/0603 15004KT BKN006 PROB40 TEMPO 0603/0608 VRB02KT 2000 BCFG

Frequencies

REC - 134.75 MHz - LUXEMBOURG ATIS

TWR - 118.10 MHz - LUXEMBOURG TOWER

APP - 118.90 MHz - LUXEMBOURG APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	197 ft	13,140 ft	60.19	ASPHALT	0 ft	0 ft
	60 m	4,005 m	57.66		0 m	0 m
24	197 ft	13,140 ft	240.22	ASPHALT	0 ft	171 ft
	60 m	4,005 m	237.70		0 m	52 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	ILE	109.90 MHz	18 nm	-	-	1,158 ft
				33 km	-		1,158 m
24	DME	ILW	110.70 MHz	18 nm	-	-	1,158 ft
				33 km	-		1,158 m
06	LOC-ILS	ILE	109.90 MHz	18 nm	60.17	-	1,233 ft
				33 km	57.64		1,233 m
24	LOC-ILS	ILW	110.70 MHz	18 nm	240.17	-	1,233 ft
				33 km	237.64		1,233 m
06	GS	ILE	109.90 MHz	10 nm	60.17	3.00	1,233 ft
				19 km	57.64		1,233 m
24	GS	ILW	110.70 MHz	10 nm	240.17	3.00	1,233 ft
				19 km	237.64		1,233 m

EGSS

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 1

Elevation: 348 ft / 106 m
Location: 51.885100 0.234989
Magnetic Var: 0.576 E

METAR

EGSS 060050Z AUTO 10002KT 9999 SCT021 BKN034 BKN040 12/10 Q1007

TAF

TAF EGSS 052259Z 0600/0706 VRB03KT 9999 FEW045 PROB40 0603/0607 0300 FG BKN001 TEMPO 0608/0622 7000 SHRA PROB30 TS

Frequencies

DEP - 120.62 MHz - ESSEX RADAR	APP - 120.62 MHz - ESSEX RADAR
APP - 132.05 MHz - STANSTED APPROACH	CLD - 121.95 MHz - STANSTED CLEARANCE DELIVERY
GND - 121.72 MHz - STANSTED GROUND	TWR - 123.80 MHz - STANSTED TOWER
TWR - 125.55 MHz - STANSTED TOWER	APP - 136.20 MHz - STANSTED DIRECT
REC - 114.55 MHz - ATIS	REC - 127.17 MHz - ATIS

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	151 ft	9,984 ft	42.78	ASPHALT	974 ft	0 ft
	46 m	3,043 m	42.21		297 m	0 m
22	151 ft	9,984 ft	222.81	ASPHALT	0 ft	0 ft
	46 m	3,043 m	222.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	ISED	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
22	DME	ISX	110.50 MHz	18 nm	-	-	348 ft
				33 km	-		348 m
04	LOC-ILS	ISED	110.50 MHz	18 nm	42.80	-	348 ft
				33 km	42.22		348 m
22	LOC-ILS	ISX	110.50 MHz	18 nm	222.80	-	348 ft
				33 km	222.22		348 m
04	GS	ISED	110.50 MHz	10 nm	42.80	3.00	348 ft
				19 km	42.22		348 m
22	GS	ISX	110.50 MHz	10 nm	222.80	3.00	348 ft
				19 km	222.22		348 m