

OLBA

Beyrouth Rafic Hariri Intl


LGAV

Athens Intl Airport Elefterios Venizel

2024/05/15 0714Z

OLBA KUKLA **R19** DESPO **UR19** DASNI **UM601** RDS **UL995** PIDAX LGAV

617.05 nm / 1142.77 km

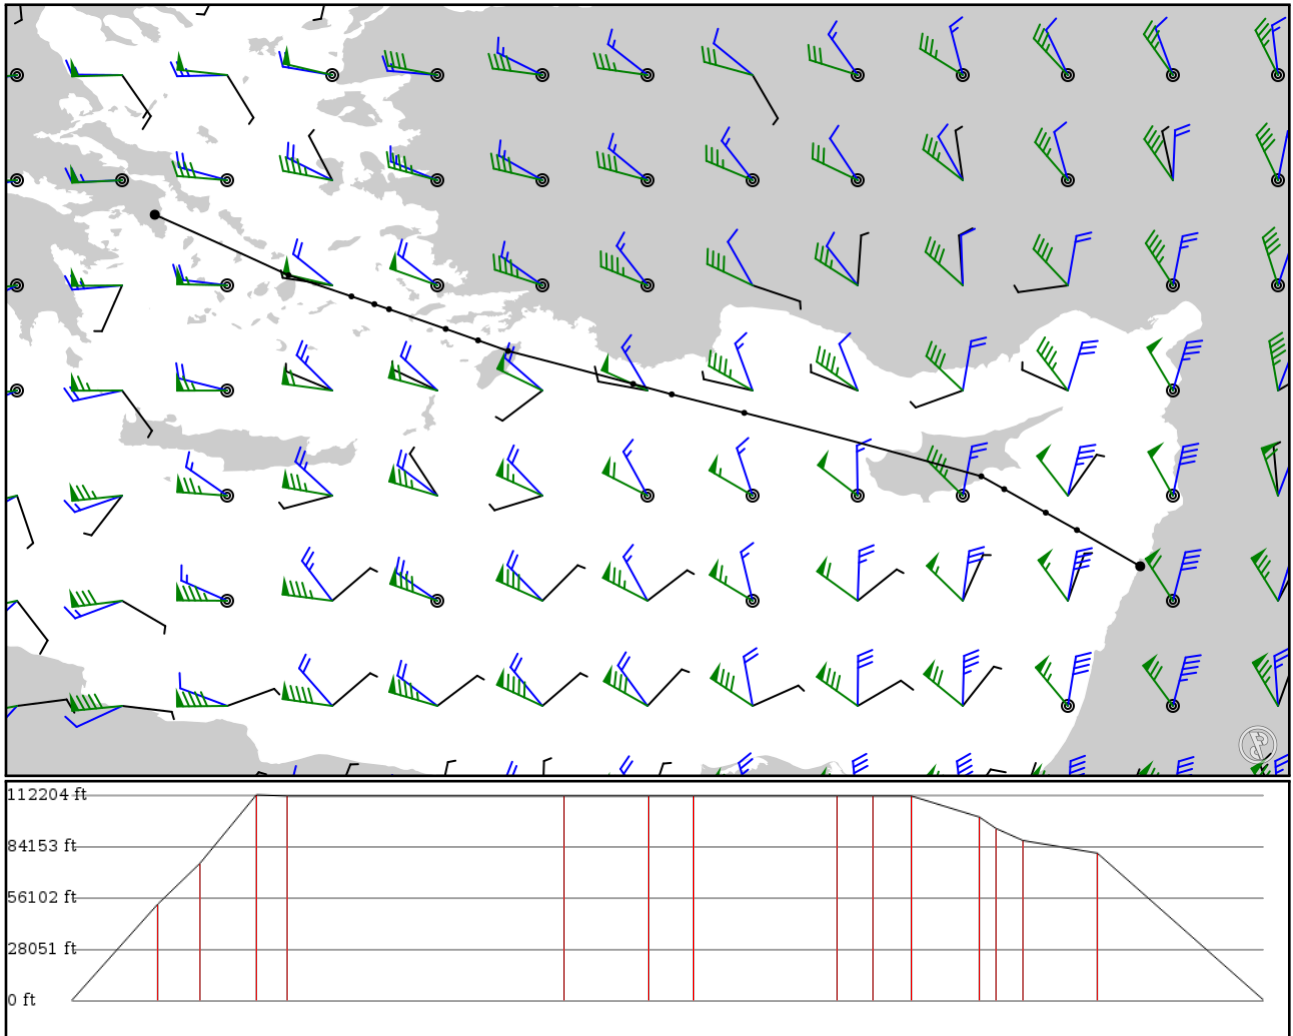

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OLBA APT	-	33.82053 35.48779	0 ft 0 m	-	Beyrouth Rafic Hariri Intl
KUKLA FIX	-	34.24500 34.74667	16,000 ft 4,877 m	44	-
DESPO FIX	R19 AWY-LO	34.44833 34.38167	22,800 ft 6,949 m	21	-
REXAL FIX	UR19 AWY-HI	34.72333 33.89500	34,200 ft 10,424 m	29	-
LCA VOR	UR19 AWY-HI	34.87333 33.62667	34,000 ft 10,363 m	16	LARNACA VOR-DME
DASNI FIX	UR19 AWY-HI	35.61667 30.85000	34,000 ft 10,363 m	143	-
EVENO FIX	UM601 AWY-HI	35.83333 30.00000	34,000 ft 10,363 m	43	-
EXELA FIX	UM601 AWY-HI	35.95556 29.54778	34,000 ft 10,363 m	23	-
RDS VOR	UM601 AWY-HI	36.34111 28.08250	34,000 ft 10,363 m	74	RODOS VOR-DME
ASIMI FIX	UL995 AWY-HI	36.46556 27.73111	34,000 ft 10,363 m	18	-
USINI FIX	UL995 AWY-HI	36.59944 27.35250	34,000 ft 10,363 m	19	-
KOPAR FIX	UL995 AWY-HI	36.83028 26.68861	30,500 ft 9,296 m	34	-
LURUS FIX	UL995 AWY-HI	36.88917 26.51694	28,600 ft 8,717 m	8	-
AKINA FIX	UL995 AWY-HI	36.98028 26.24861	26,600 ft 8,108 m	13	-
PIDAX FIX	UL995 AWY-HI	37.22806 25.51139	24,500 ft 7,468 m	38	-
LGAV APT	-	37.93636 23.94447	0 ft 0 m	85	Athens Intl Airport Elefterios Venizel

OLBA

Region: LEBANON
Timezone: UNKNOWN
Runways: 3

Elevation: 84 ft / 26 m
Location: 33.820500 35.487600
Magnetic Var: 5.443 E

METAR

OLBA 150700Z 22007KT CAVOK 22/16 Q1016 NOSIG

TAF

TAF OLBA 150400Z 1506/1612 24010KT 8000 SCT030 BECMG 1518/1520 VRB03KT BECMG 1608/1610 25008KT CAVOK

Frequencies

REC - 120.60 MHz - ATIS
GND - 121.90 MHz - BEIRUT HARIRI GROUND
APP - 120.30 MHz - BEIRUT APPROACH
TWR - 118.90 MHz - BEIRUT HARIRI TOWER
APP - 119.30 MHz - BEIRUT APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03	148 ft	12,484 ft	32.77	CONCRETE	1,821 ft	390 ft
	45 m	3,805 m	27.32		555 m	119 m
21	148 ft	12,484 ft	212.78	CONCRETE	3,268 ft	390 ft
	45 m	3,805 m	207.34		996 m	119 m
16	148 ft	11,168 ft	166.99	CONCRETE	591 ft	394 ft
	45 m	3,404 m	161.54		180 m	120 m
34	148 ft	11,168 ft	346.99	CONCRETE	0 ft	341 ft
	45 m	3,404 m	341.55		0 m	104 m
17	148 ft	10,623 ft	176.90	ASPHALT	0 ft	154 ft
	45 m	3,238 m	171.46		0 m	47 m
35	148 ft	10,623 ft	356.90	ASPHALT	2,697 ft	0 ft
	45 m	3,238 m	351.46		822 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03	DME	IKK	110.70 MHz	18 nm	-	-	43 ft
				33 km	-		43 m
16	DME	IBB	110.10 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
03	LOC-ILS	IKK	110.70 MHz	18 nm	32.78	-	84 ft
				33 km	27.34		84 m
16	LOC-ILS	IBB	110.10 MHz	18 nm	166.99	-	84 ft
				33 km	161.55		84 m
17	LOC-ILS	BIL	109.50 MHz	18 nm	176.90	-	84 ft
				33 km	171.46		84 m
03	GS	IKK	110.70 MHz	10 nm	32.78	3.00	84 ft
				19 km	27.34		84 m
16	GS	IBB	110.10 MHz	10 nm	166.99	3.00	84 ft
				19 km	161.55		84 m
17	GS	BIL	109.50 MHz	10 nm	176.90	3.00	84 ft
				19 km	171.46		84 m

LGAV

Region: GREECE
Timezone: EUROPE/ATHENS
Runways: 2

Elevation: 308 ft / 94 m
Location: 37.936700 23.944500
Magnetic Var: 5.108 E

METAR

LGAV 150650Z VRB03KT 9999 FEW025 19/09 Q1017 NOSIG

TAF

TAF TAF LGAV 150500Z 1506/1606 VRB05KT 9999 FEW025 BECMG 1508/1510 13010KT SCT025 SCT070 BECMG 1517/1519 VRB05KT F

Frequencies

REC - 136.12 MHz - ATIS	REC - 131.17 MHz - ATHENS INFORMATION
REC - 124.02 MHz - ATHENS INFORMATION	TWR - 136.27 MHz - VENIZELOS TOWER
TWR - 122.10 MHz - VENIZELOS TOWER	TWR - 118.62 MHz - VENIZELOS TOWER
GND - 121.75 MHz - VENIZELOS GROUND	GND - 121.95 MHz - VENIZELOS GROUND
GND - 121.90 MHz - VENIZELOS GROUND	GND - 121.80 MHz - VENIZELOS GROUND
CLD - 118.67 MHz - CLEARANCE DELIVERY	APP - 132.97 MHz - ATHENS APPROACH
APP - 130.25 MHz - ATHENS APPROACH	APP - 128.95 MHz - ATHENS APPROACH
APP - 126.57 MHz - ATHENS APPROACH	APP - 125.52 MHz - ATHENS APPROACH
APP - 121.40 MHz - ATHENS APPROACH	APP - 121.40 MHz - ATHENS DIRECT
APP - 118.47 MHz - ATHENS DIRECT	DEP - 118.30 MHz - ATHENS DEPARTURE
DEP - 128.95 MHz - ATHENS DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03R	151 ft	13,135 ft	36.87	ASPHALT	984 ft	394 ft
	46 m	4,004 m	31.76		300 m	120 m
21L	151 ft	13,135 ft	216.89	ASPHALT	984 ft	394 ft
	46 m	4,004 m	211.78		300 m	120 m
03L	151 ft	12,478 ft	36.86	ASPHALT	984 ft	394 ft
	46 m	3,803 m	31.75		300 m	120 m
21R	151 ft	12,478 ft	216.87	ASPHALT	984 ft	394 ft
	46 m	3,803 m	211.77		300 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03L	DME	IATL	110.50 MHz	18 nm	-	-	255 ft
				33 km	-		255 m
21L	DME	IEVL	111.10 MHz	18 nm	-	-	303 ft
				33 km	-		303 m
21R	DME	IEVR	110.50 MHz	18 nm	-	-	282 ft
				33 km	-		282 m
03L	LOC-ILS	IATL	110.50 MHz	18 nm	36.52	-	282 ft
				33 km	31.41		282 m
03R	LOC-ILS	IATR	111.10 MHz	18 nm	36.97	-	302 ft
				33 km	31.86		302 m
21L	LOC-ILS	IEVL	111.10 MHz	18 nm	216.52	-	271 ft
				33 km	211.41		271 m
21R	LOC-ILS	IEVR	110.50 MHz	18 nm	216.50	-	255 ft
				33 km	211.40		255 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03L	GS	IATL	110.50 MHz	10 nm	37.04	3.00	255 ft
				19 km	31.93		255 m
03R	GS	IATR	111.10 MHz	10 nm	37.07	3.00	271 ft
				19 km	31.96		271 m
21L	GS	IEVL	111.10 MHz	10 nm	217.07	3.00	302 ft
				19 km	211.96		302 m
21R	GS	IEVR	110.50 MHz	10 nm	217.04	3.00	282 ft
				19 km	211.93		282 m