

KIAH

Houston George Bush Int


KLAX

Los Angeles Intl

2024/05/07 0937Z

KIAH CUZZZ PUFR ELP PXR PKE J4 TNP PAUMA ARRVD KLAX

1205.50 nm / 2232.59 km

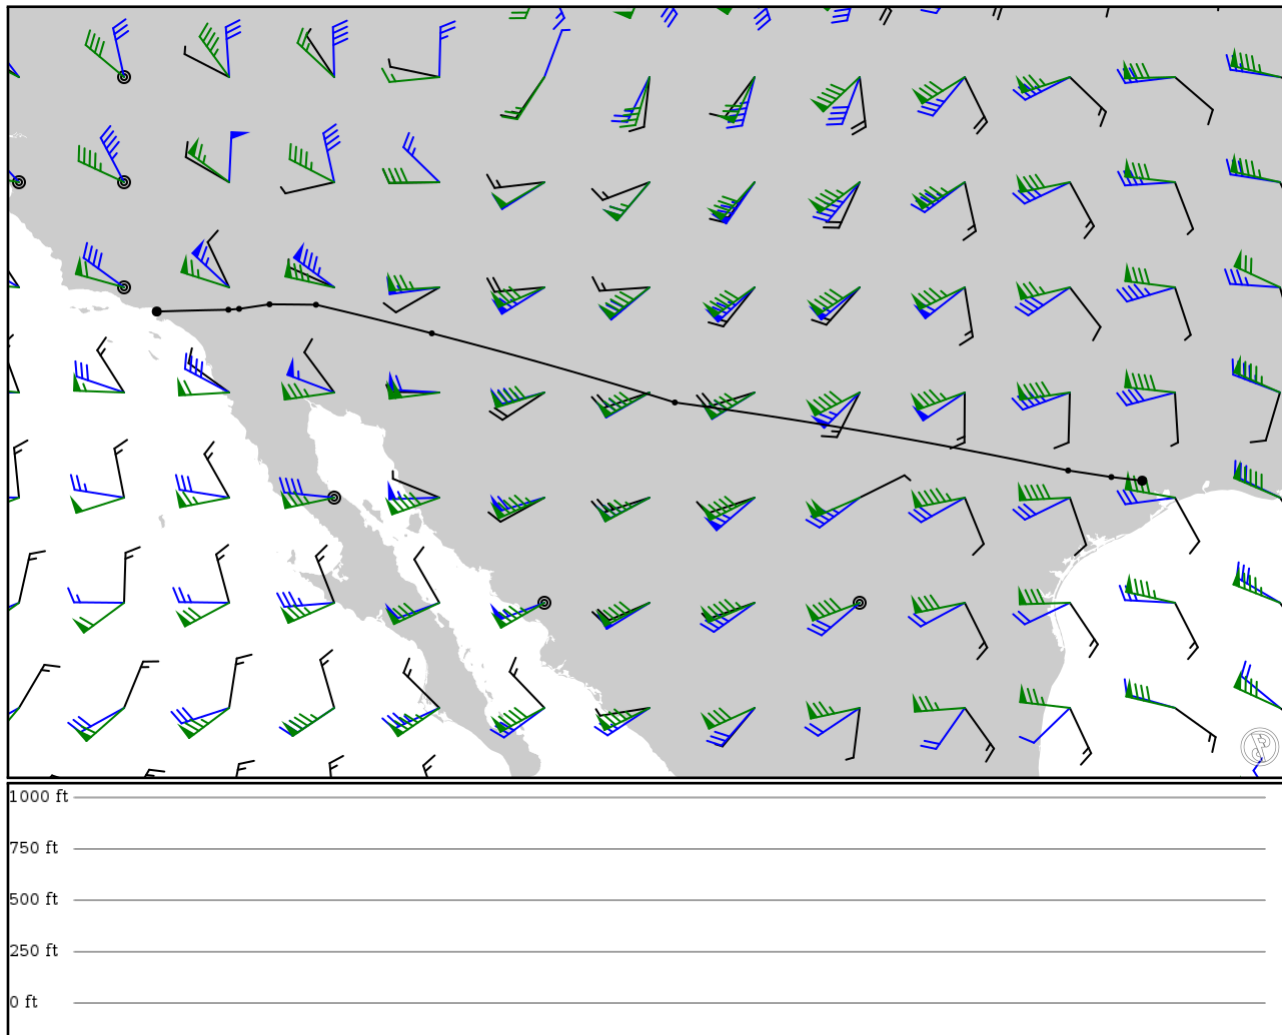

Notes

Requested: KIAH SHAAK BNDTO CUZZZ PUFR PSTUR CRGER ELP PXR PKE J4 TNP PAUMA ARRVD SEAVU2 KLAX
Unmatched points: SHAAK BNDTO PSTUR CRGER SEAVU2

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KIAH APT	-	29.98544 -95.34119	0 ft 0 m	-	Houston George Bush Int
CUZZZ FIX	-	30.07065 -96.06335	0 ft 0 m	37 -	
PUFER FIX	-	30.22402 -97.07558	0 ft 0 m	53 -	
ELP VOR	-	31.81592 -106.28189	0 ft 0 m	483	EL PASO VORTAC
PXR VOR	-	33.43303 -111.97019	0 ft 0 m	303	PHOENIX VORTAC
PKE VOR	-	34.10200 -114.68208	0 ft 0 m	141	PARKER VORTAC
TNP VOR	J4 AWY-HI	34.11222 -115.76992	0 ft 0 m	54	TWENTYNINE PALMS VORTAC
PAUMA FIX	-	34.00563 -116.48178	0 ft 0 m	35 -	
ARRVD FIX	-	33.98556 -116.73266	0 ft 0 m	12 -	
KLAX APT	-	33.94313 -118.40892	0 ft 0 m	83	Los Angeles Intl

KIAH

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 5

Elevation: 98 ft / 30 m
Location: 29.985400 -95.341200
Magnetic Var: 1.731 E

METAR

KIAH 070853Z 16008KT 7SM BKN015 BKN021 OVC038 26/23 A2970 RMK A02 SLP056 T02610233 56012

TAF

TAF AMD KIAH 070920Z 0709/0812 16008KT P6SM BKN015 BKN021 OVC040 FM071500 21008KT P6SM BKN015 BKN025 FM071900 1600

Frequencies

REC - 124.05 MHz - D-ATIS
CLD - 128.10 MHz - CLEARANCE DELIVERY
GND - 121.70 MHz - HOUSTON GROUND
TWR - 120.72 MHz - HOUSTON TOWER
TWR - 135.15 MHz - HOUSTON TOWER
APP - 120.05 MHz - HOUSTON APPROACH
DEP - 126.67 MHz - HOUSTON DEPARTURE
DEP - 133.60 MHz - HOUSTON DEPARTURE

REC - 122.95 MHz - UNICOM
GND - 119.95 MHz - HOUSTON GROUND
GND - 118.57 MHz - HOUSTON GROUND
TWR - 125.35 MHz - HOUSTON TOWER
TWR - 127.30 MHz - HOUSTON TOWER
APP - 124.35 MHz - HOUSTON APPROACH
DEP - 132.25 MHz - HOUSTON DEPARTURE
DEP - 127.12 MHz - HOUSTON DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
15R	151 ft	10,010 ft	152.07	CONCRETE	0 ft	407 ft
	46 m	3,051 m	150.34		0 m	124 m
33L	151 ft	10,010 ft	332.08	CONCRETE	0 ft	407 ft
	46 m	3,051 m	330.35		0 m	124 m
15L	151 ft	12,013 ft	152.08	CONCRETE	0 ft	413 ft
	46 m	3,662 m	150.35		0 m	126 m
33R	151 ft	12,013 ft	332.09	CONCRETE	0 ft	413 ft
	46 m	3,662 m	330.36		0 m	126 m
08L	151 ft	9,008 ft	89.94	CONCRETE	0 ft	387 ft
	46 m	2,746 m	88.21		0 m	118 m
26R	151 ft	9,008 ft	269.96	CONCRETE	0 ft	387 ft
	46 m	2,746 m	268.23		0 m	118 m
08R	151 ft	9,412 ft	89.96	CONCRETE	0 ft	384 ft
	46 m	2,869 m	88.22		0 m	117 m
26L	151 ft	9,412 ft	269.97	CONCRETE	0 ft	384 ft
	46 m	2,869 m	268.24		0 m	117 m
09	151 ft	10,009 ft	89.95	CONCRETE	0 ft	387 ft
	46 m	3,051 m	88.22		0 m	118 m
27	151 ft	10,009 ft	269.97	CONCRETE	0 ft	387 ft
	46 m	3,051 m	268.24		0 m	118 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IBZU	111.55 MHz	18 nm	-	-	90 ft
				33 km	-		90 m
08R	DME	IIAH	109.70 MHz	18 nm	-	-	109 ft
				33 km	-		109 m
09	DME	IUYO	110.90 MHz	18 nm	-	-	100 ft
				33 km	-		100 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	IJYV	109.70 MHz	18 nm	-	-	109 ft
				33 km	-		109 m
26R	DME	IOND	111.55 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27	DME	IGHI	110.90 MHz	18 nm	-	-	100 ft
				33 km	-		100 m
08L	LOC-ILS	IBZU	111.55 MHz	18 nm	89.95	-	98 ft
				33 km	88.22		98 m
08R	LOC-ILS	IIAH	109.70 MHz	18 nm	89.96	-	98 ft
				33 km	88.23		98 m
09	LOC-ILS	IUYO	110.90 MHz	18 nm	89.96	-	98 ft
				33 km	88.23		98 m
15R	LOC-ILS	ILKM	111.15 MHz	18 nm	152.08	-	98 ft
				33 km	150.35		98 m
26L	LOC-ILS	IJYV	109.70 MHz	18 nm	269.96	-	98 ft
				33 km	268.23		98 m
26R	LOC-ILS	IOND	111.55 MHz	18 nm	269.95	-	98 ft
				33 km	268.22		98 m
27	LOC-ILS	IGHI	110.90 MHz	18 nm	269.96	-	98 ft
				33 km	268.23		98 m
33R	LOC-ILS	ICDG	111.90 MHz	18 nm	332.09	-	98 ft
				33 km	330.36		98 m
08L	GS	IBZU	111.55 MHz	10 nm	89.95	3.00	98 ft
				19 km	88.22		98 m
08R	GS	IIAH	109.70 MHz	10 nm	89.96	3.00	98 ft
				19 km	88.23		98 m
09	GS	IUYO	110.90 MHz	10 nm	89.96	3.00	98 ft
				19 km	88.23		98 m
15R	GS	ILKM	111.15 MHz	10 nm	152.08	3.00	98 ft
				19 km	150.35		98 m
26L	GS	IJYV	109.70 MHz	10 nm	269.96	3.00	98 ft
				19 km	268.23		98 m
26R	GS	IOND	111.55 MHz	10 nm	269.95	3.00	98 ft
				19 km	268.22		98 m
27	GS	IGHI	110.90 MHz	10 nm	269.96	3.00	98 ft
				19 km	268.23		98 m
33R	GS	ICDG	111.90 MHz	10 nm	332.09	3.00	98 ft
				19 km	330.36		98 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.442 E

METAR

KLAX 070853Z 00000KT 10SM CLR 13/11 A2995 RMK A02 SLP142 T01330106 58006 \$

TAF

TAF AMD KLAX 070809Z 0708/0812 VRB03KT P6SM SKC FM071800 26010KT P6SM SKC FM080300 VRB03KT P6SM SKC

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.53		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.50		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.52		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m