


2024/05/14 1153Z

YWLM YSSY

76.68 nm / 142.01 km

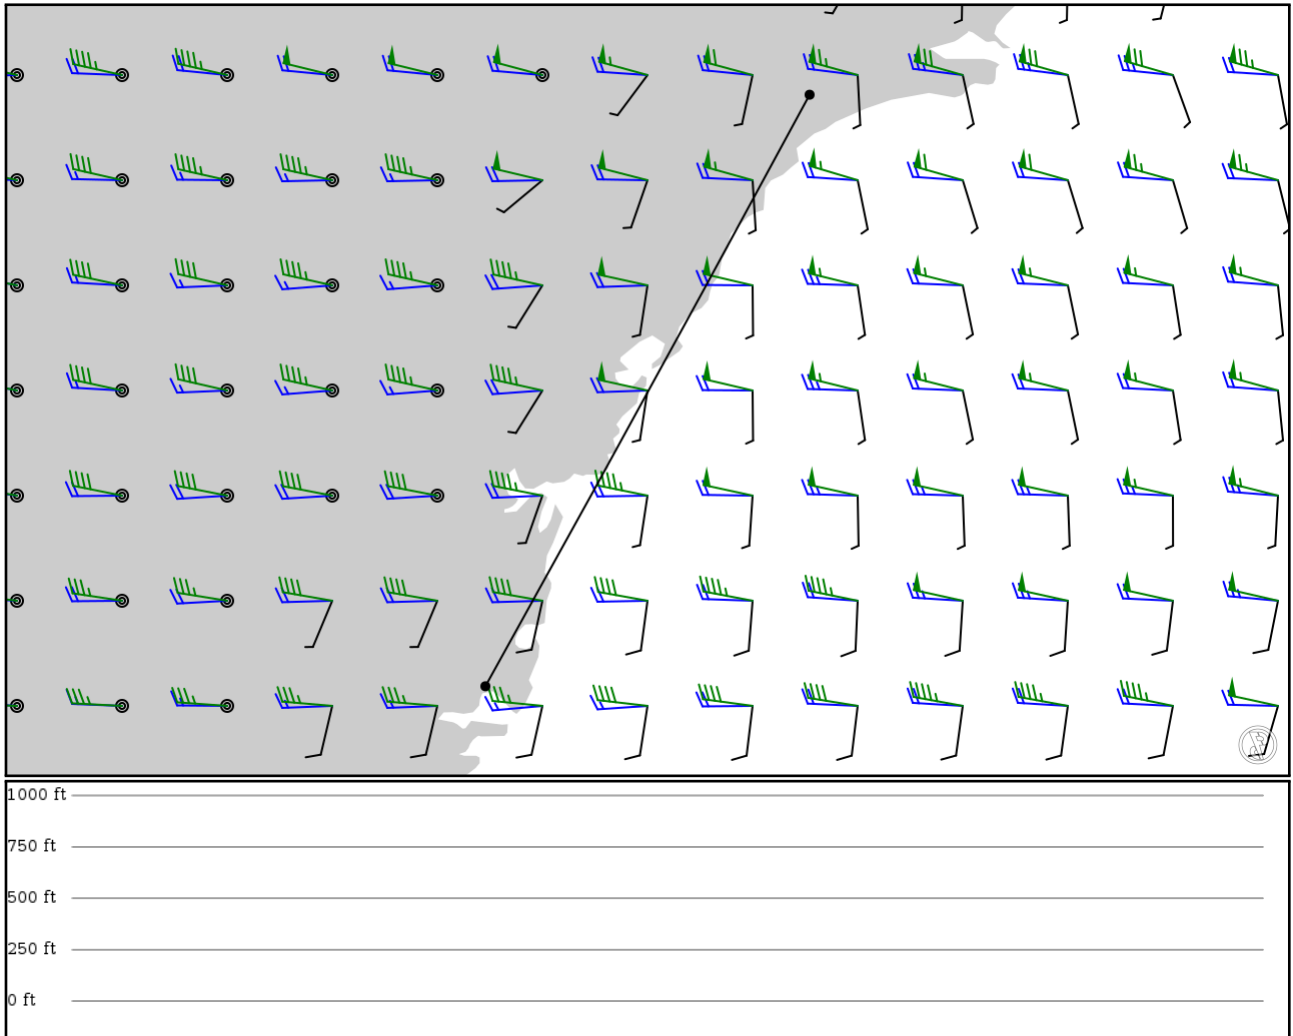

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
YWLM	-	-32.78877	0 ft	-	-
APT	-	151.82487	0 m	-	-
YSSY	-	-33.94962	0 ft	76	-
APT	-	151.18832	0 m	-	-

YWLM

Region: AUSTRALIA
Timezone: AUSTRALIA/SYDNEY
Runways: 1

Elevation: 30 ft / 9 m
Location: -32.796900 151.836000
Magnetic Var: 12.457 E

METAR

YWLM 141130Z AUTO 31004KT 9999 // NCD 13/12 Q1027 RF00.0/000.2

TAF

TAF YWLM 140438Z 1405/1500 14010KT 9999 FEW030 FM140600 18010KT 9999 FEW020 FM141000 30005KT 9999 -SHRA SCT010 BKN020

Frequencies

REC - 134.45 MHz - ATIS
CLD - 130.35 MHz - ACD
TWR - 118.30 MHz -
COM - 118.30 MHz - CTAF
GND - 121.80 MHz - SMC
APP - 135.70 MHz - WILLY APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	148 ft	9,105 ft	130.47	ASPHALT	0 ft	912 ft
	45 m	2,775 m	118.01		0 m	278 m
30	148 ft	9,105 ft	310.46	ASPHALT	0 ft	194 ft
	45 m	2,775 m	298.00		0 m	59 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12	LOC-ILS	IWM	110.50 MHz	18 nm	130.68	-	31 ft
				33 km	118.23		31 m
12	GS	IWM	110.50 MHz	10 nm	130.88	3.00	31 ft
				19 km	118.42		31 m

YSSY

Region: AUSTRALIA
Timezone: AUSTRALIA/SYDNEY
Runways: 3

Elevation: 21 ft / 6 m
Location: -33.946100 151.177000
Magnetic Var: 12.672 E

METAR

YSSY 141130Z 17007KT 9999 FEW035 SCT065 17/14 Q1027 RF00.0/000.0

TAF

TAF YSSY 140806Z 1409/1512 16010KT 9999 SCT015 BKN025 FM141500 29006KT 9999 FEW030 FM150500 06007KT 9999 FEW030

Frequencies

REC - 118.55 MHz - ATIS	REC - 126.55 MHz - ATIS
TWR - 124.70 MHz - SYDNEY TOWER	TWR - 120.50 MHz - SYDNEY TOWER
GND - 126.50 MHz - SYDNEY GROUND	GND - 121.70 MHz - SYDNEY GROUND
GND - 130.95 MHz - ANSETT APRON	GND - 127.60 MHz - SYDNEY COORDINATOR
CLD - 133.80 MHz - SYDNEY CLEARANCE DELIVERY	APP - 124.40 MHz - SYDNEY APPROACH
APP - 128.30 MHz - SYDNEY APPROACH	APP - 135.90 MHz - SYDNEY APPROACH
APP - 126.10 MHz - SYDNEY DIRECT	APP - 125.30 MHz - SYDNEY DIRECT
APP - 133.95 MHz - ILS MONITOR	APP - 119.45 MHz - ILS MONITOR
DEP - 129.70 MHz - SYDNEY DEPARTURE	DEP - 128.30 MHz - SYDNEY DEPARTURE
DEP - 123.00 MHz - SYDNEY DEPARTURE	DEP - 118.40 MHz - SYDNEY DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	148 ft	8,018 ft	167.85	ASPHALT	758 ft	295 ft
	45 m	2,444 m	155.18		231 m	90 m
34R	148 ft	8,018 ft	347.85	ASPHALT	125 ft	295 ft
	45 m	2,444 m	335.18		38 m	90 m
07	148 ft	8,285 ft	74.14	ASPHALT	0 ft	489 ft
	45 m	2,525 m	61.46		0 m	149 m
25	148 ft	8,285 ft	254.12	ASPHALT	331 ft	197 ft
	45 m	2,525 m	241.45		101 m	60 m
16R	148 ft	13,029 ft	167.86	ASPHALT	279 ft	299 ft
	45 m	3,971 m	155.19		85 m	91 m
34L	148 ft	13,029 ft	347.85	ASPHALT	0 ft	620 ft
	45 m	3,971 m	335.18		0 m	189 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	DME	ISY	109.90 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
16L	DME	ISS	110.90 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
25	DME	ISW	109.70 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
34R	DME	IKN	109.30 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
07	LOC-ILS	ISY	109.90 MHz	18 nm	74.13	-	21 ft
				33 km	61.46		21 m
16L	LOC-ILS	ISS	110.90 MHz	18 nm	167.85	-	21 ft
				33 km	155.18		21 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16R	LOC-ILS	IKS	109.50 MHz	18 nm	167.86	-	21 ft
				33 km	155.19		21 m
25	LOC-ILS	ISW	109.70 MHz	18 nm	254.13	-	21 ft
				33 km	241.46		21 m
34L	LOC-ILS	ISN	110.10 MHz	18 nm	347.86	-	21 ft
				33 km	335.19		21 m
34R	LOC-ILS	IKN	109.30 MHz	18 nm	347.85	-	21 ft
				33 km	335.18		21 m
07	GS	ISY	109.90 MHz	10 nm	74.13	3.00	21 ft
				19 km	61.46		21 m
16L	GS	ISS	110.90 MHz	10 nm	167.85	3.00	21 ft
				19 km	155.18		21 m
16R	GS	IKS	109.50 MHz	10 nm	167.86	3.00	21 ft
				19 km	155.19		21 m
25	GS	ISW	109.70 MHz	10 nm	254.13	3.00	21 ft
				19 km	241.46		21 m
34L	GS	ISN	110.10 MHz	10 nm	347.86	3.00	21 ft
				19 km	335.19		21 m
34R	GS	IKN	109.30 MHz	10 nm	347.85	3.00	21 ft
				19 km	335.18		21 m