


2024/06/04 1148Z

UTAA ABDAN **B143D** ASHGA **A117** UTSB **A477** SOMEK UAFM

808.75 nm / 1497.81 km

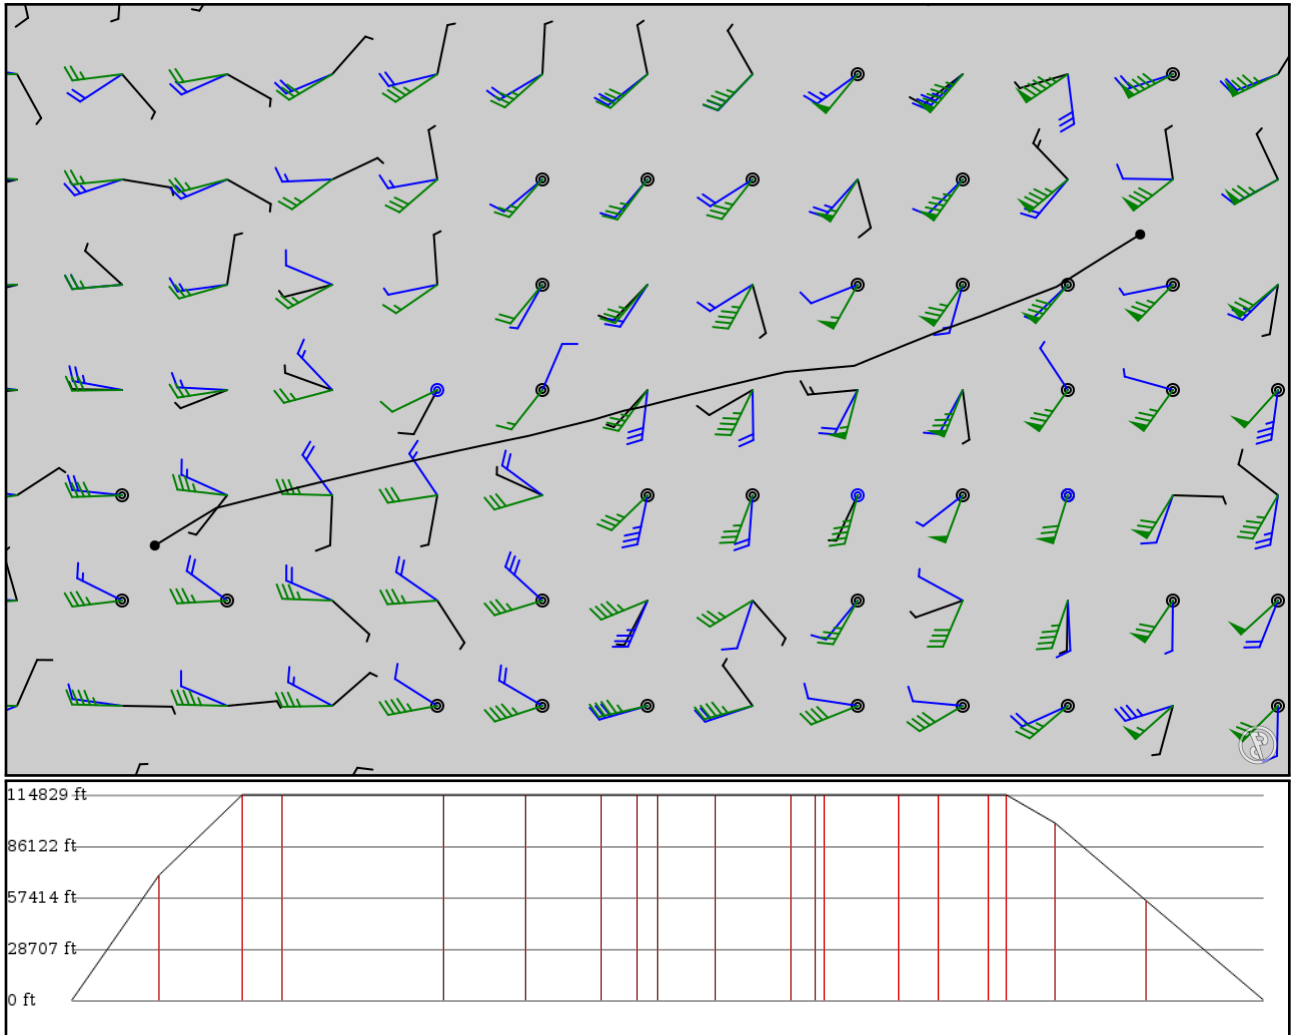

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 18000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
UTAA	-	37.98287	0 ft	-	ASHGABAT
APT	-	58.36311	0 m		
ABDAN	-	38.59500	21,300 ft	59	-
FIX	-	59.36667	6,492 m		
ARSUV	B143D	38.88000	35,000 ft	56	-
FIX	AWY-LO	60.50500	10,668 m		
MEDEP	B143D	39.01500	35,000 ft	27	-
FIX	AWY-LO	61.06333	10,668 m		
ASHGA	B143D	39.53167	35,000 ft	109	-
FIX	AWY-LO	63.32667	10,668 m		
UTSB	A117	39.77500	35,000 ft	55	BUKHARA
APT	AWY-LO	64.48333	10,668 m		
TUKRI	A477	40.03667	35,000 ft	50	-
FIX	AWY-LO	65.53500	10,668 m		
UBENA	A477	40.18333	35,000 ft	24	-
FIX	AWY-LO	66.03333	10,668 m		
DAKLI	A477	40.24333	35,000 ft	13	-
FIX	AWY-LO	66.32000	10,668 m		
RAVEN	A477	40.45000	35,000 ft	39	-
FIX	AWY-LO	67.13333	10,668 m		
UVASU	A477	40.71000	35,000 ft	51	-
FIX	AWY-LO	68.21833	10,668 m		
RAVOB	A477	40.78833	35,000 ft	16	-
FIX	AWY-LO	68.55833	10,668 m		
CV	A477	40.81667	35,000 ft	5	SYRDARYA NDB
NDB	AWY-LO	68.68333	10,668 m		
SW	A477	40.91667	35,000 ft	51	KARAKHTAY NDB
NDB	AWY-LO	69.80000	10,668 m		
TISIB	A477	41.13000	35,000 ft	26	-
FIX	AWY-LO	70.32167	10,668 m		
RODKI	A477	41.39667	35,000 ft	33	-
FIX	AWY-LO	70.98167	10,668 m		
BOKLA	A477	41.48833	35,000 ft	11	-
FIX	AWY-LO	71.21167	10,668 m		
SORAM	A477	41.73167	30,200 ft	33	-
FIX	AWY-LO	71.87833	9,205 m		
SOMEK	A477	42.20667	17,000 ft	61	-
FIX	AWY-LO	73.10833	5,182 m		
UAFM	-	43.06130	0 ft	79	MANAS
APT	-	74.47756	0 m		

UTAA

Region: TAJIKISTAN, TURKMENISTAN AND UZBEKISTAN Elevation: 690 ft / 210 m
Timezone: ASIA/ASHGABAT Location: 37.986700 58.358300
Runways: 2 Magnetic Var: 5.368 E

METAR

UTAA 041100Z 28006KT 9999 FEW050 SCT100 32/11 Q1014 R88/70D NOSIG

TAF

TAF UTAA 040445Z 0406/0506 34016KT 6000 SCT050CB SCT050 TEMPO 0406/0409 30014G24KT 5000 DRDU BECMG 0418/0420 2401

Frequencies

GND - 121.70 MHz - TWR - 120.00 MHz -
APP - 123.50 MHz - APP - 118.70 MHz - KRUG RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	230 ft	12,483 ft	119.46	CONCRETE	0 ft	0 ft
	70 m	3,805 m	114.09		0 m	0 m
30L	230 ft	12,483 ft	299.48	CONCRETE	0 ft	0 ft
	70 m	3,805 m	294.11		0 m	0 m
12L	203 ft	12,483 ft	119.41	CONCRETE	0 ft	0 ft
	62 m	3,805 m	114.04		0 m	0 m
30R	203 ft	12,483 ft	299.43	CONCRETE	0 ft	0 ft
	62 m	3,805 m	294.06		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12L	LOC-ILS	ABW	108.50 MHz	18 nm	119.42	-	690 ft
				33 km	114.05		690 m
12R	LOC-ILS	IAD	111.10 MHz	18 nm	119.47	-	690 ft
				33 km	114.10		690 m
30L	LOC-ILS	IPQ	110.50 MHz	18 nm	299.47	-	690 ft
				33 km	294.10		690 m
30R	LOC-ILS	AHD	108.70 MHz	18 nm	299.42	-	690 ft
				33 km	294.05		690 m
12L	GS	ABW	108.50 MHz	10 nm	119.42	3.00	690 ft
				19 km	114.05		690 m
12R	GS	IAD	111.10 MHz	10 nm	119.47	3.00	690 ft
				19 km	114.10		690 m
30L	GS	IPQ	110.50 MHz	10 nm	299.47	3.00	690 ft
				19 km	294.10		690 m
30R	GS	AHD	108.70 MHz	10 nm	299.42	3.00	690 ft
				19 km	294.05		690 m