

LFPG

Paris Charles De Gaulle


KMLB

Melbourne Intl

2024/05/04 0313Z

LFPG DVL **UM25** GAPLI **UL739** SOMAX 5000N02000W 5000N02500W 5000N03000W 4900N03500W 4800N04000W
4700N04500W 4600N05000W RAFIN **N27A** NANSO LOMPI **A699** BURTT **R513** JAINS **A700** INDRO KMLB

3977.53 nm / 7366.39 km

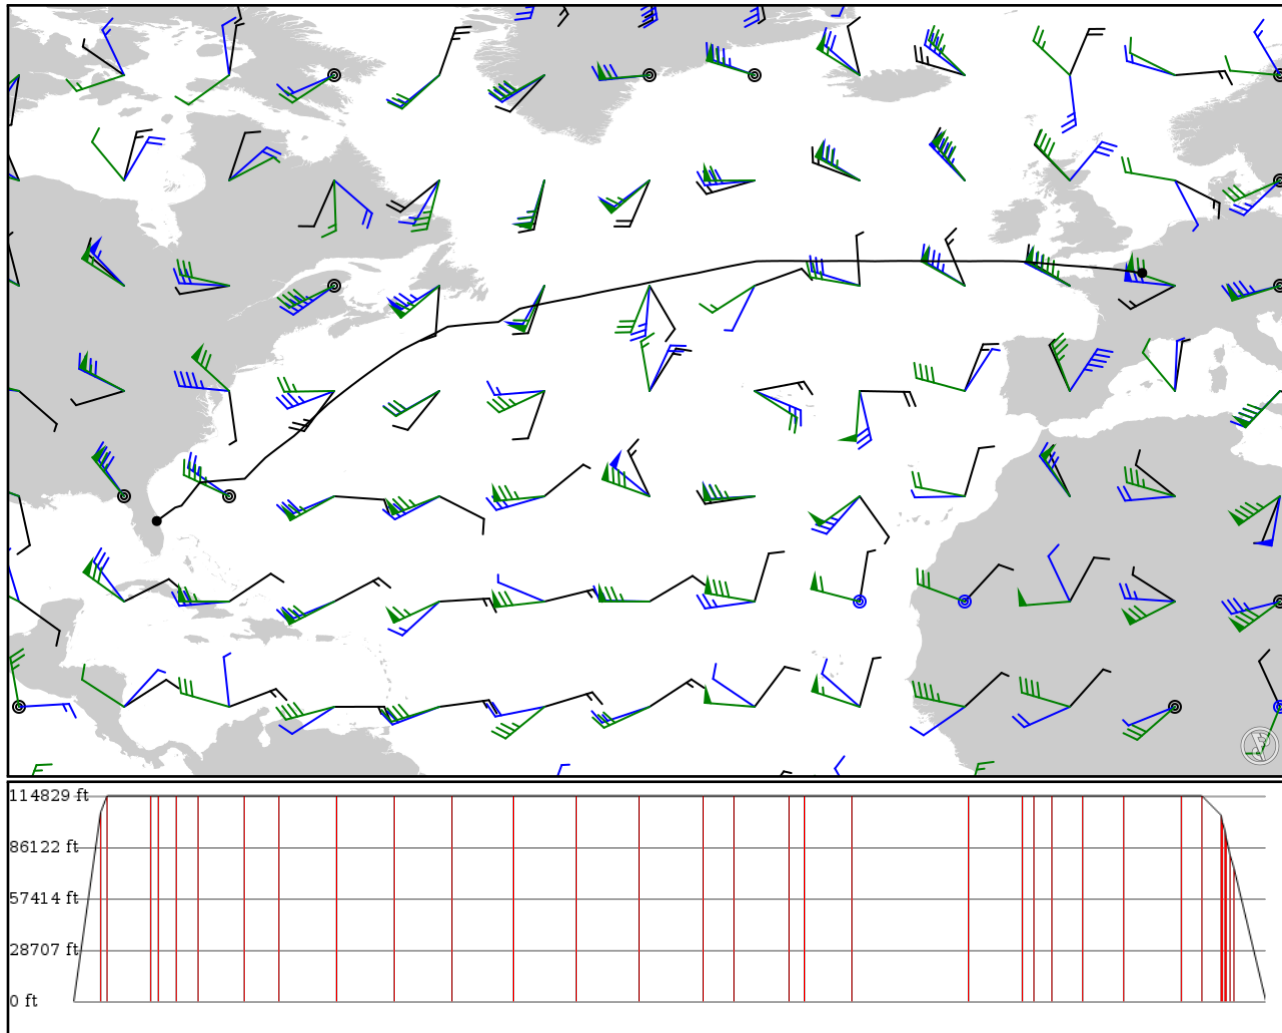

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFPG APT	-	49.00974 2.56262	0 ft 0 m	-	Paris Charles De Gaulle
DVL VOR	-	49.31075 0.31272	32,200 ft 9,815 m	90	DEAUVILLE SAINT GATIEN VOR
INGOR FIX	UM25 AWY-HI	49.36444 -0.25000	35,000 ft 10,668 m	22	-
ANNET FIX	UM25 AWY-HI	49.65139 -4.00139	35,000 ft 10,668 m	147	-
NAKID FIX	UM25 AWY-HI	49.71500 -4.62306	35,000 ft 10,668 m	24	-
IDOKI FIX	UM25 AWY-HI	49.86028 -6.19417	35,000 ft 10,668 m	61	-
GAPLI FIX	UM25 AWY-HI	50.00000 -8.00000	35,000 ft 10,668 m	70	-
KENUK FIX	UL739 AWY-HI	50.00000 -12.00000	35,000 ft 10,668 m	154	-
SOMAX FIX	UL739 AWY-HI	50.00000 -15.00000	35,000 ft 10,668 m	115	-
5000N0200W LATLON	-	50.00000 -20.00000	35,000 ft 10,668 m	192	-
5000N0250W LATLON	-	50.00000 -25.00000	35,000 ft 10,668 m	192	-
5000N0300W LATLON	-	50.00000 -30.00000	35,000 ft 10,668 m	192	-
4900N0350W LATLON	-	49.00000 -35.00000	35,000 ft 10,668 m	204	-
4800N0400W LATLON	-	48.00000 -40.00000	35,000 ft 10,668 m	207	-
4700N0450W LATLON	-	47.00000 -45.00000	35,000 ft 10,668 m	211	-
4600N0500W LATLON	-	46.00000 -50.00000	35,000 ft 10,668 m	215	-
RAFIN FIX	-	44.88333 -51.80472	35,000 ft 10,668 m	101	-
NANSO FIX	N27A AWY-HI	44.48889 -56.07111	35,000 ft 10,668 m	183	-
LOMPI FIX	-	44.00000 -57.00000	35,000 ft 10,668 m	49	-
FOCUS FIX	A699 AWY-LO	42.50000 -60.00000	35,000 ft 10,668 m	159	-
AKERS FIX	A699 AWY-LO	37.97820 -66.15546	35,000 ft 10,668 m	391	-
CLXTN FIX	A699 AWY-LO	35.72294 -68.55608	35,000 ft 10,668 m	177	-
DANER FIX	A699 AWY-LO	35.26667 -69.06667	35,000 ft 10,668 m	37	-
HUBER FIX	A699 AWY-LO	34.58261 -69.98375	35,000 ft 10,668 m	61	-
ODEAL FIX	A699 AWY-LO	33.43088 -71.48221	35,000 ft 10,668 m	101	-
BURTT FIX	A699 AWY-LO	31.66890 -73.21600	35,000 ft 10,668 m	137	-
JAINS	R513	31.35557	35,000 ft	194	-

Ident Type	Via	Lat Lon	Alt		Dist (nm)	Name
FIX	AWY-LO	-77.00004	10,668 m			
CARPS	A700	30.40800	35,000 ft	68	-	
FIX	AWY-HI	-77.75017	10,668 m			
CANIT	A700	29.56251	31,700 ft	61	-	
FIX	AWY-HI	-78.42585	9,662 m			
ETECK	A700	29.48567	30,500 ft	5	-	
FIX	AWY-HI	-78.48727	9,296 m			
ADOOR	A700	29.40008	29,100 ft	6	-	
FIX	AWY-HI	-78.55569	8,870 m			
LEND5	A700	29.36594	27,800 ft	6	-	
FIX	AWY-HI	-78.67010	8,473 m			
BGDOG	A700	29.29349	24,900 ft	13	-	
FIX	AWY-HI	-78.90826	7,590 m			
INDRO	A700	29.23672	22,700 ft	10	-	
FIX	AWY-HI	-79.09607	6,919 m			
KMLB	-	28.10229	0 ft	106	Melbourne Intl	
APT	-	-80.64340	0 m			

LFPG

Region: FRANCE
Timezone: EUROPE/PARIS
Runways: 4

Elevation: 392 ft / 119 m
Location: 49.009700 2.562570
Magnetic Var: 1.493 E

METAR

LFPG 040300Z 14005KT CAVOK 08/06 Q1013 NOSIG

TAF

TAF LFPG 032300Z 0400/0506 15005KT CAVOK TX15/0415Z TN07/0405Z PROB40 0403/0407 3000 BR PROB30 TEMPO 0403/0406 08

Frequencies

REC - 128.32 MHz - ATIS	REC - 127.12 MHz - ATIS
TWR - 120.90 MHz - DE GAULLE TOWER	TWR - 125.32 MHz - DE GAULLE TOWER
TWR - 119.62 MHz - DE GAULLE TOWER	TWR - 119.25 MHz - DE GAULLE TOWER
TWR - 118.65 MHz - DE GAULLE TOWER	TWR - 123.60 MHz - DE GAULLE TOWER
TWR - 120.65 MHz - DE GAULLE TOWER	GND - 121.90 MHz - DE GAULLE GROUND
GND - 125.30 MHz - DE GAULLE GROUND	GND - 121.70 MHz - DE GAULLE GROUND
CLD - 121.80 MHz - CLEARANCE DELIVERY	APP - 118.15 MHz - DE GAULLE APPROACH
APP - 119.85 MHz - DE GAULLE APPROACH	APP - 121.15 MHz - DE GAULLE APPROACH
APP - 125.82 MHz - DE GAULLE APPROACH	APP - 126.42 MHz - DE GAULLE APPROACH
DEP - 124.35 MHz - DE GAULLE DEPARTURE	DEP - 126.57 MHz - DE GAULLE DEPARTURE
DEP - 131.20 MHz - DE GAULLE DEPARTURE	DEP - 133.37 MHz - DE GAULLE DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	148 ft	13,713 ft	85.31	ASPHALT	0 ft	489 ft
	45 m	4,180 m	83.82		0 m	149 m
26R	148 ft	13,713 ft	265.35	ASPHALT	1,877 ft	279 ft
	45 m	4,180 m	263.86		572 m	85 m
09L	197 ft	8,866 ft	85.32	ASPHALT	0 ft	0 ft
	60 m	2,703 m	83.82		0 m	0 m
27R	197 ft	8,866 ft	265.35	ASPHALT	0 ft	0 ft
	60 m	2,703 m	263.85		0 m	0 m
08R	197 ft	8,833 ft	85.33	ASPHALT	0 ft	489 ft
	60 m	2,692 m	83.83		0 m	149 m
26L	197 ft	8,833 ft	265.35	ASPHALT	0 ft	486 ft
	60 m	2,692 m	263.86		0 m	148 m
09R	148 ft	13,746 ft	85.30	ASPHALT	0 ft	0 ft
	45 m	4,190 m	83.81		0 m	0 m
27L	148 ft	13,746 ft	265.34	ASPHALT	1,959 ft	0 ft
	45 m	4,190 m	263.85		597 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08R	DME	DSE	108.55 MHz	18 nm	-	-	358 ft
				33 km	-		358 m
09L	DME	PNE	109.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
09R	DME	CGE	110.10 MHz	18 nm	-	-	392 ft
				33 km	-		392 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	DME	DSU	108.35 MHz	18 nm	-	-	338 ft
				33 km	-		338 m
27L	DME	CGW	110.70 MHz	18 nm	-	-	407 ft
				33 km	-		407 m
27R	DME	PNW	110.35 MHz	18 nm	-	-	392 ft
				33 km	-		392 m
08L	LOC-ILS	GLE	108.70 MHz	18 nm	85.33	-	392 ft
				33 km	83.84		392 m
08R	LOC-ILS	DSE	108.55 MHz	18 nm	85.34	-	392 ft
				33 km	83.85		392 m
09L	LOC-ILS	PNE	109.35 MHz	18 nm	85.33	-	392 ft
				33 km	83.84		392 m
09R	LOC-ILS	CGE	110.10 MHz	18 nm	85.32	-	392 ft
				33 km	83.83		392 m
26L	LOC-ILS	DSU	108.35 MHz	18 nm	265.34	-	392 ft
				33 km	263.85		392 m
26R	LOC-ILS	GAU	111.95 MHz	18 nm	265.33	-	392 ft
				33 km	263.84		392 m
27L	LOC-ILS	CGW	110.70 MHz	18 nm	265.32	-	392 ft
				33 km	263.83		392 m
27R	LOC-ILS	PNW	110.35 MHz	18 nm	265.33	-	392 ft
				33 km	263.84		392 m
08L	GS	GLE	108.70 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.84		392 m
08R	GS	DSE	108.55 MHz	10 nm	85.34	3.00	392 ft
				19 km	83.85		392 m
09L	GS	PNE	109.35 MHz	10 nm	85.33	3.00	392 ft
				19 km	83.84		392 m
09R	GS	CGE	110.10 MHz	10 nm	85.32	3.00	392 ft
				19 km	83.83		392 m
26L	GS	DSU	108.35 MHz	10 nm	265.34	3.00	392 ft
				19 km	263.85		392 m
26R	GS	GAU	111.95 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.84		392 m
27L	GS	CGW	110.70 MHz	10 nm	265.32	3.00	392 ft
				19 km	263.83		392 m
27R	GS	PNW	110.35 MHz	10 nm	265.33	3.00	392 ft
				19 km	263.84		392 m

KMLB

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 33 ft / 10 m
Location: 28.102300 -80.643400
Magnetic Var: 7.350 W

METAR

KMLB 040253Z 11009KT 10SM SCT026 BKN033 24/19 A3001 RMK A02 SLP163 T02440189 53018

TAF

TAF KMLB 032320Z 0400/0424 09010KT P6SM FEW050 FM040600 12004KT P6SM FEW025 FM041600 10014KT P6SM FEW050

Frequencies

COM - 122.95 MHz - MELBOURNE UNICOM	REC - 132.55 MHz - MELBOURNE ATIS
GND - 121.90 MHz - MELBOURNE GROUND	TWR - 118.20 MHz - MELBOURNE TOWER
APP - 132.65 MHz - ORLANDO APPROACH	DEP - 132.65 MHz - ORLANDO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	75 ft	3,004 ft	41.93	ASPHALT	0 ft	0 ft
	23 m	916 m	49.28		0 m	0 m
23	75 ft	3,004 ft	221.93	ASPHALT	0 ft	102 ft
	23 m	916 m	229.28		0 m	31 m
09L	150 ft	6,006 ft	86.87	ASPHALT	0 ft	0 ft
	46 m	1,831 m	94.22		0 m	0 m
27R	150 ft	6,006 ft	266.88	ASPHALT	0 ft	0 ft
	46 m	1,831 m	274.23		0 m	0 m
09R	150 ft	10,191 ft	86.86	ASPHALT	0 ft	102 ft
	46 m	3,106 m	94.20		0 m	31 m
27L	150 ft	10,191 ft	266.87	ASPHALT	699 ft	400 ft
	46 m	3,106 m	274.22		213 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	LOC-ILS	IMLB	108.30 MHz	18 nm	86.88	-	21 ft
				33 km	94.22		21 m
09R	GS	IMLB	108.30 MHz	10 nm	87.72	2.80	32 ft
				19 km	95.07		32 m