

# KFLL

Fort Lauderdale Hollywood Intl


# KATL

Hartsfield Jackson Atlanta Intl

2024/05/14 1617Z

KFLL LLAKE J55 INPIN J91 HITTR J89 SOONE KATL

514.02 nm / 951.96 km

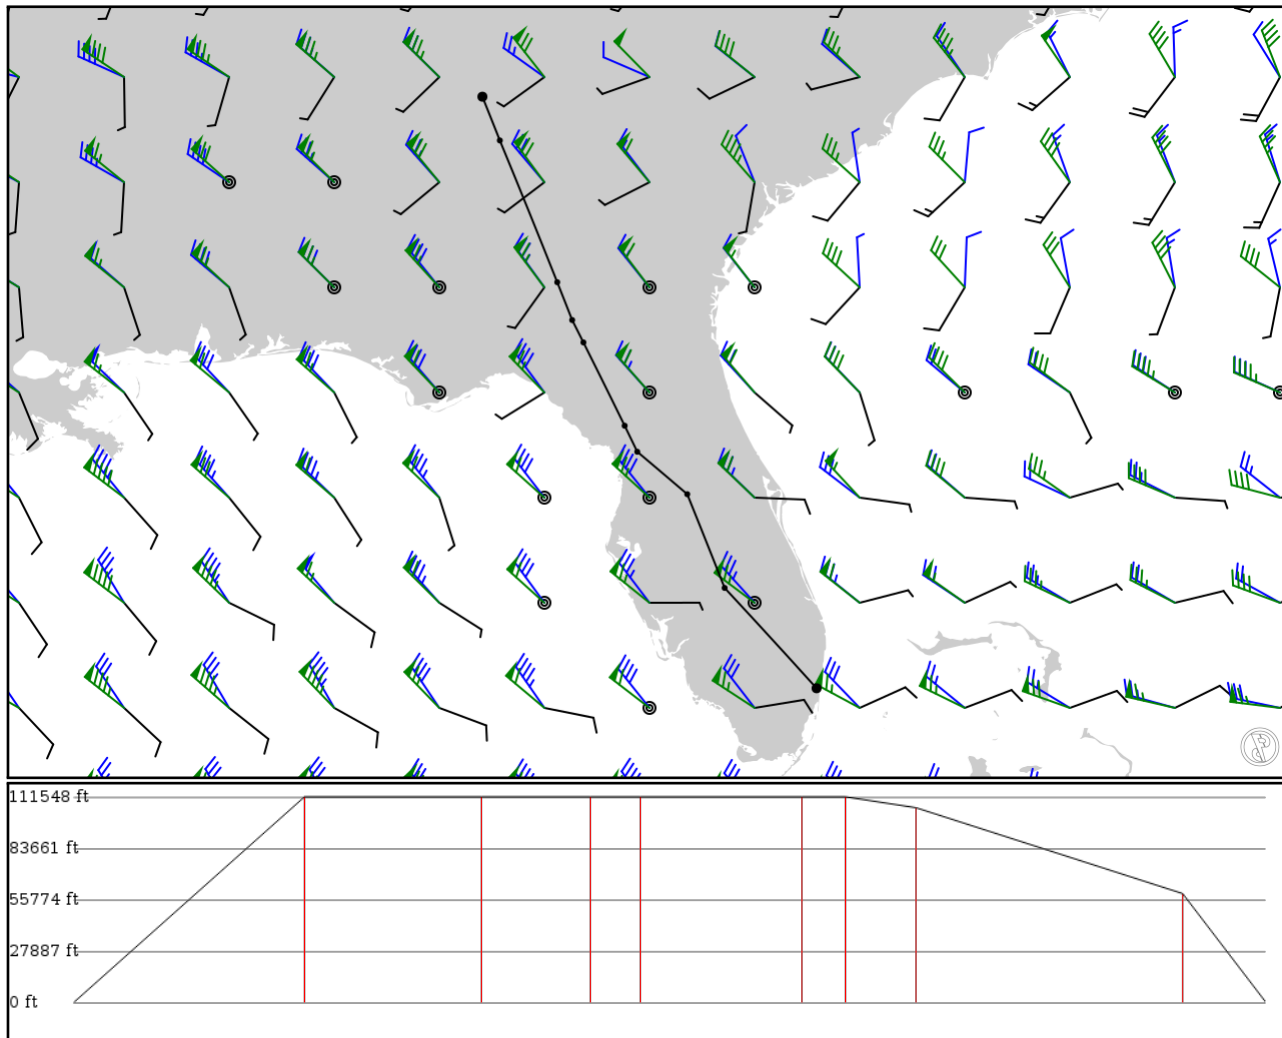

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: no
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KFLL APT	-	26.07164 -80.15269	0 ft 0 m	-	Fort Lauderdale Hollywood Intl
LLAKE FIX	-	27.35490 -81.32913	34,000 ft 10,363 m	99	-
INPIN FIX	J55 AWY-HI	28.55353 -81.80744	34,000 ft 10,363 m	76	-
HITTR FIX	J91 AWY-HI	29.09625 -82.44697	34,000 ft 10,363 m	46	-
FAGAN FIX	J89 AWY-HI	29.42917 -82.60816	34,000 ft 10,363 m	21	-
NECOS FIX	J89 AWY-HI	30.49451 -83.13589	34,000 ft 10,363 m	69	-
OTK VOR	J89 AWY-HI	30.78044 -83.27972	34,000 ft 10,363 m	18	VALDOSTA VOR-DME
ICBOD FIX	J89 AWY-HI	31.26425 -83.47061	32,200 ft 9,815 m	30	-
SOONE FIX	J89 AWY-HI	33.07740 -84.20520	18,000 ft 5,486 m	115	-
KATL APT	-	33.63662 -84.42821	0 ft 0 m	35	Hartsfield Jackson Atlanta Intl

## KFLL

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 2

Elevation: 65 ft / 20 m  
Location: 26.071300 -80.149500  
Magnetic Var: 7.391 W

## METAR

KFLL 141553Z 17011G17KT 10SM FEW028 BKN250 33/23 A2995 RMK A02 SLP140 T03330233

## TAF

TAF AMD KFLL 141502Z 1415/1518 16015G23KT P6SM SCT030 SCT050 FM150000 17010KT P6SM SCT030

## Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m

## KATL

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 5

Elevation: 1,026 ft / 313 m  
Location: 33.636600 -84.428000  
Magnetic Var: 5.631 W

## METAR

KATL 141552Z 13005KT 6SM BR BKN007 BKN026 BKN065 OVC150 20/18 A2984 RMK AO2 RAB13E50 SLP100 P0000 T02000178

## TAF

KATL 141559Z 1416/1518 13005KT 6SM BR VCSH BKN007 BKN026 OVC150 FM141900 20010KT P6SM VCSH BKN025 OVC050 FM142200

## Frequencies

REC - 119.65 MHz - D-ATIS	REC - 125.55 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 121.65 MHz - ATLANTA GROUND	GND - 121.75 MHz - ATLANTA GROUND
GND - 121.90 MHz - ATLANTA GROUND	TWR - 119.10 MHz - ATLANTA TOWER
TWR - 119.30 MHz - ATLANTA TOWER	TWR - 119.50 MHz - ATLANTA TOWER
TWR - 123.85 MHz - ATLANTA TOWER	TWR - 125.32 MHz - ATLANTA TOWER
APP - 127.90 MHz - ATLANTA APPROACH	APP - 128.00 MHz - ATLANTA APPROACH
DEP - 125.65 MHz - ATLANTA DEPARTURE	DEP - 125.70 MHz - ATLANTA DEPARTURE
DEP - 135.37 MHz - ATLANTA DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	151 ft	12,400 ft	89.99	CONCRETE	0 ft	0 ft
	46 m	3,780 m	95.62		0 m	0 m
27R	151 ft	12,400 ft	270.01	CONCRETE	518 ft	0 ft
	46 m	3,780 m	275.64		158 m	0 m
09R	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
27L	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08L	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
26R	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
10	151 ft	9,008 ft	89.97	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.60		0 m	0 m
28	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08R	151 ft	10,009 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	95.61		0 m	0 m
26L	151 ft	10,009 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	3,051 m	275.62		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IHFV	109.30 MHz	18 nm	-	-	993 ft
				33 km	-		993 m
08R	DME	IATL	109.90 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IHZK	110.50 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
09R	DME	IFUN	108.90 MHz	18 nm	-	-	987 ft
				33 km	-		987 m
10	DME	IOMO	111.55 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
26L	DME	IBRU	108.70 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m
26R	DME	IGXZ	110.10 MHz	18 nm	-	-	1,000 ft
				33 km	-		1,000 m
27L	DME	IFSQ	108.50 MHz	18 nm	-	-	1,020 ft
				33 km	-		1,020 m
27R	DME	IAFA	111.30 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
28	DME	IPKU	111.75 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
08L	LOC-ILS	IHFV	109.30 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
08R	LOC-ILS	IATL	109.90 MHz	18 nm	89.99	-	1,026 ft
				33 km	95.62		1,026 m
09L	LOC-ILS	IHZK	110.50 MHz	18 nm	90.01	-	968 ft
				33 km	95.64		968 m
09R	LOC-ILS	IFUN	108.90 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
10	LOC-ILS	IOMO	111.55 MHz	18 nm	89.98	-	970 ft
				33 km	95.61		970 m
26L	LOC-ILS	IBRU	108.70 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
26R	LOC-ILS	IGXZ	110.10 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27L	LOC-ILS	IFSQ	108.50 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27R	LOC-ILS	IAFA	111.30 MHz	18 nm	270.00	-	1,026 ft
				33 km	275.63		1,026 m
28	LOC-ILS	IPKU	111.75 MHz	18 nm	269.97	-	970 ft
				33 km	275.60		970 m
08L	GS	IHFV	109.30 MHz	10 nm	90.96	3.00	1,008 ft
				19 km	96.59		1,008 m
08R	GS	IATL	109.90 MHz	10 nm	90.96	3.00	1,012 ft
				19 km	96.59		1,012 m
09L	GS	IHZK	110.50 MHz	10 nm	90.02	3.00	1,017 ft
				19 km	95.65		1,017 m
09R	GS	IFUN	108.90 MHz	10 nm	90.96	3.00	1,021 ft
				19 km	96.59		1,021 m
10	GS	IOMO	111.55 MHz	10 nm	90.94	3.00	985 ft
				19 km	96.57		985 m
26L	GS	IBRU	108.70 MHz	10 nm	270.96	3.00	992 ft
				19 km	276.59		992 m
26R	GS	IGXZ	110.10 MHz	10 nm	270.96	3.00	984 ft
				19 km	276.59		984 m
27L	GS	IFSQ	108.50 MHz	10 nm	270.96	3.00	990 ft
				19 km	276.59		990 m
27R	GS	IAFA	111.30 MHz	10 nm	270.02	3.00	981 ft
				19 km	275.65		981 m
28	GS	IPKU	111.75 MHz	10 nm	270.94	3.00	990 ft
				19 km	276.57		990 m