

# LIME

Bergamo Orio Al Serio


# LIPZ

Venezia Tesserà

2024/05/01 0308Z

LIME OSKOR LIPZ

111.52 nm / 206.54 km

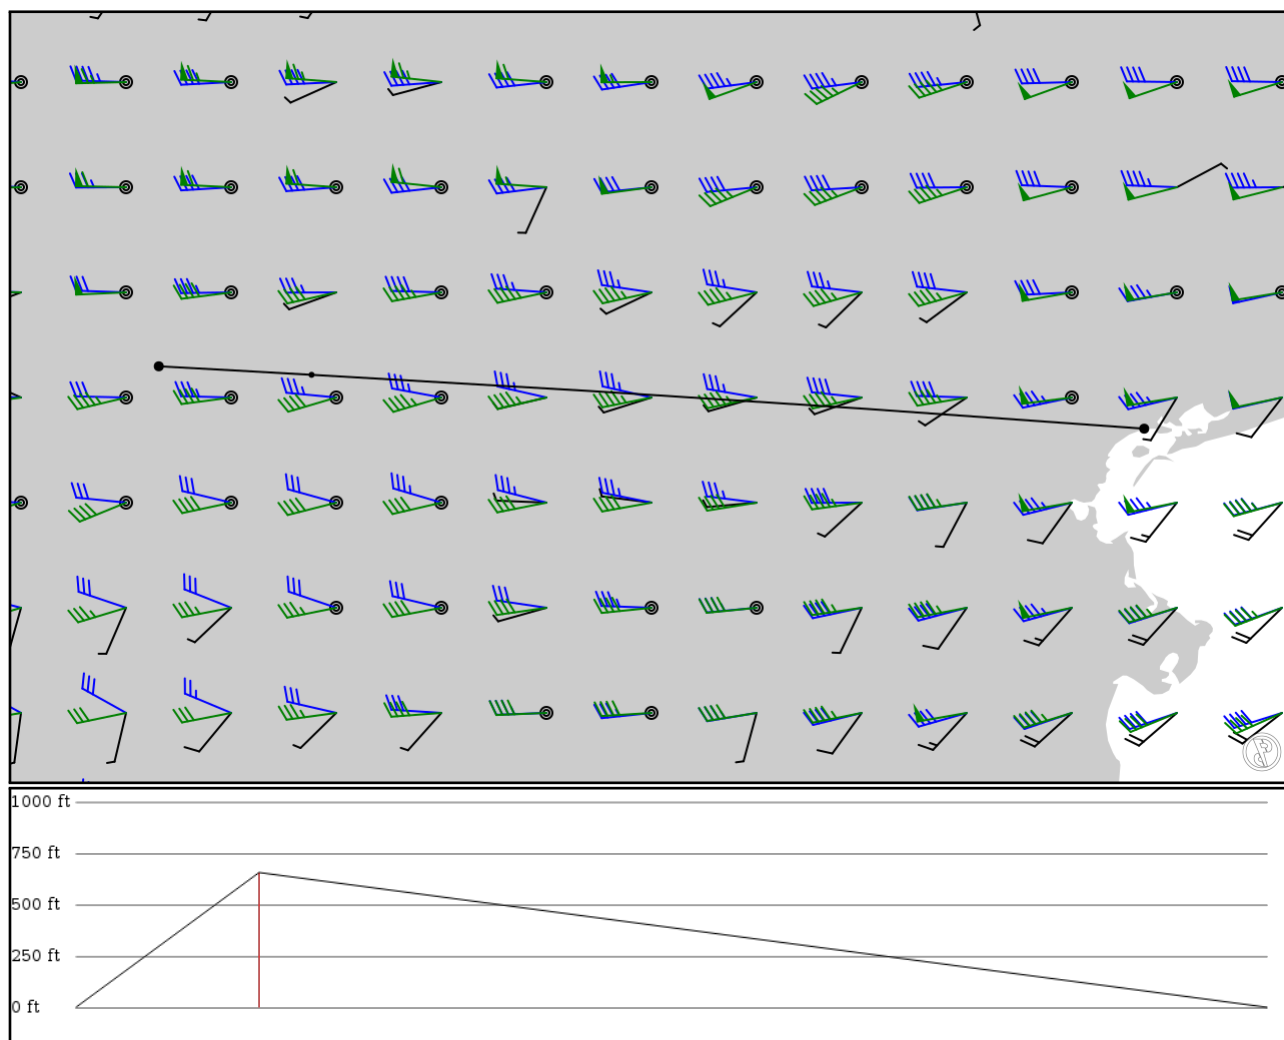

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 200ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LIME	-	45.67200	0 ft	-	Bergamo Orio Al Serio
APT	-	9.70691	0 m		
OSKOR	-	45.64920	200 ft	17	-
FIX	-	10.11670	61 m		
LIPZ	-	45.50480	0 ft	94	Venezia Tesserà
APT	-	12.34970	0 m		

## LIME

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 776 ft / 237 m  
Location: 45.672000 9.706810  
Magnetic Var: 3.340 E

## METAR

LIME 010220Z 30003KT 9999 BKN080 17/11 Q1011 NOSIG

## TAF

TAF LIME 302300Z 0100/0124 VRB05KT 9999 FEW045 BECMG 0110/0112 12013KT 4000 RA

## Frequencies

GND - 120.50 MHz - ORIO GROUND  
REC - 114.95 MHz - ATIS  
APP - 126.75 MHz - MILANO RADAR

TWR - 125.87 MHz - ORIO TOWER  
APP - 126.30 MHz - MILANO RADAR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12	59 ft	2,670 ft	121.46	ASPHALT	200 ft	0 ft
	18 m	814 m	118.12		61 m	0 m
30	59 ft	2,670 ft	301.47	ASPHALT	312 ft	0 ft
	18 m	814 m	298.13		95 m	0 m
10	148 ft	9,439 ft	104.87	ASPHALT	718 ft	0 ft
	45 m	2,877 m	101.53		219 m	0 m
28	148 ft	9,439 ft	284.90	ASPHALT	443 ft	0 ft
	45 m	2,877 m	281.56		135 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	DME	BRM	108.70 MHz	18 nm	-	-	779 ft
				33 km	-		779 m
28	LOC-ILS	BRM	108.70 MHz	18 nm	285.08	-	779 ft
				33 km	281.74		779 m
28	GS	BRM	108.70 MHz	10 nm	285.80	3.00	779 ft
				19 km	282.46		779 m

## LIPZ

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 2

Elevation: 4 ft / 1 m  
Location: 45.504800 12.349700  
Magnetic Var: 3.902 E

## METAR

LIPZ 010220Z 05008KT CAVOK 16/11 Q1012 NOSIG

## TAF

TAF LIPZ 302300Z 0100/0206 05012KT 9999 SCT060 PROB40 TEMPO 0103/0107 TSRA BECMG 0112/0114 13013KT TEMPO 0116/0200

## Frequencies

REC - 128.65 MHz - ATIS  
TWR - 120.20 MHz - VENEZIA TOWER  
APP - 118.25 MHz - VENEZIA APPROACH  
GND - 121.70 MHz - VENEZIA GROUND  
APP - 118.90 MHz - VENEZIA APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	148 ft	10,836 ft	42.03	ASPHALT	0 ft	0 ft
	45 m	3,303 m	38.13		0 m	0 m
22L	148 ft	10,836 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	3,303 m	218.15		0 m	0 m
04L	148 ft	9,129 ft	42.03	ASPHALT	318 ft	0 ft
	45 m	2,782 m	38.13		97 m	0 m
22R	148 ft	9,129 ft	222.05	ASPHALT	0 ft	0 ft
	45 m	2,782 m	218.14		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	VTS	109.95 MHz	18 nm	-	-	26 ft
				33 km	-		26 m
04R	LOC-ILS	VTS	109.95 MHz	18 nm	42.04	-	4 ft
				33 km	38.14		4 m
04R	GS	VTS	109.95 MHz	10 nm	42.04	3.00	4 ft
				19 km	38.14		4 m