

KLAS

Mc Carran Intl


KSEA

Seattle Tacoma Intl

2024/05/13 0234Z

KLAS TACUS Q13 PAWLI Q11 PAAGE KSEA

784.48 nm / 1452.86 km

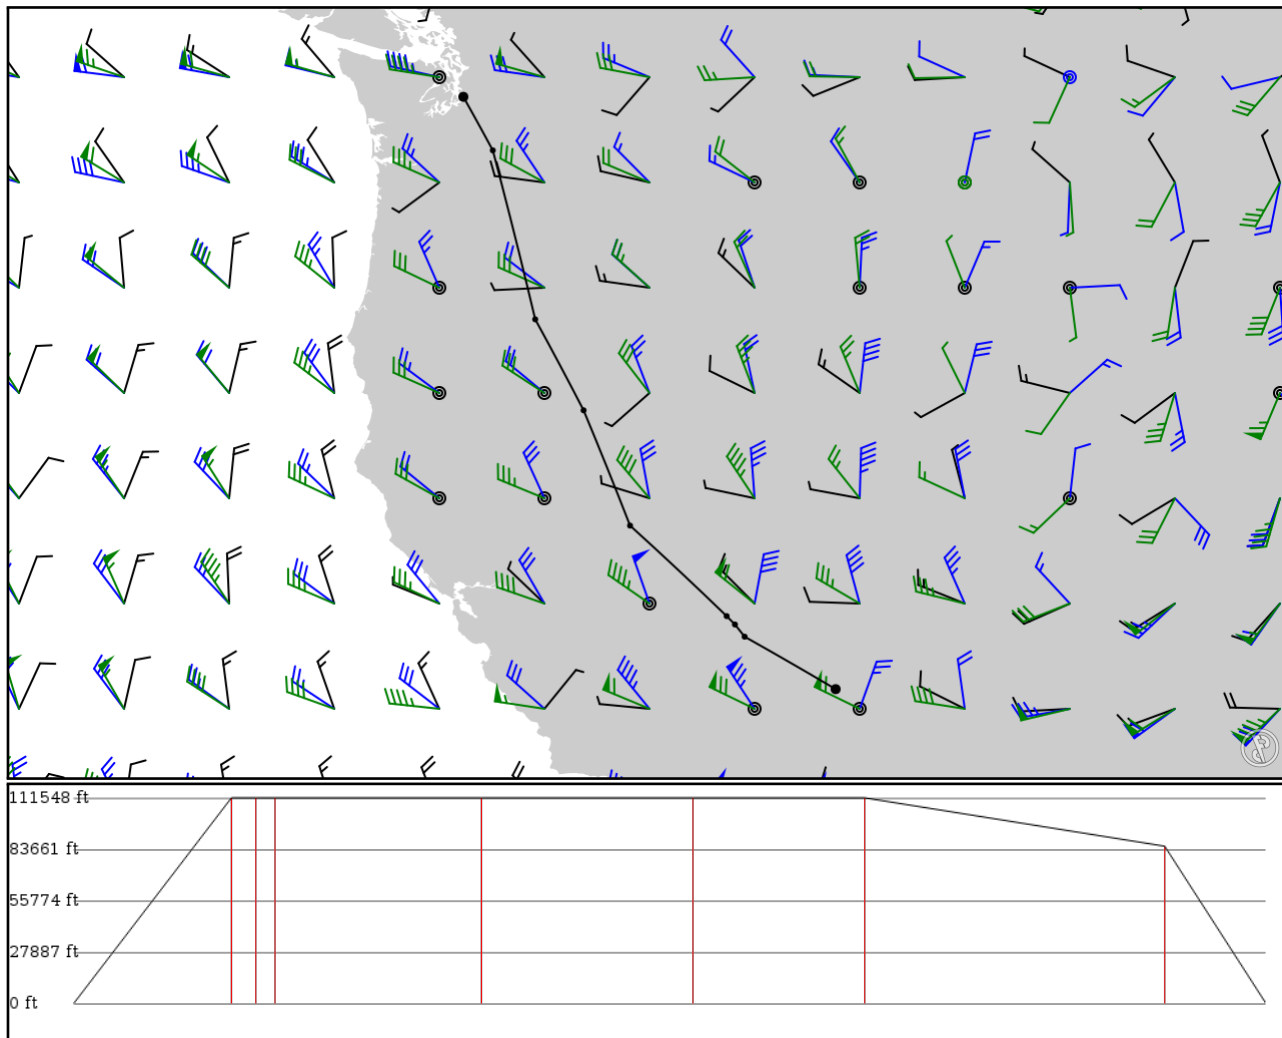

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 34000ft
- Cruise Speed: 500kts
- Descent Rate: 2200ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAS	-	36.08097	0 ft	-	Mc Carran Intl
APT	-	-115.15345	0 m		
TACUS	-	37.08778	34,000 ft	103	-
FIX	-	-116.90333	10,363 m		
WODIN	Q13	37.32222	34,000 ft	16	-
FIX	AWY-HI	-117.09028	10,363 m		
LEAHI	Q13	37.48278	34,000 ft	12	-
FIX	AWY-HI	-117.24917	10,363 m		
LOMIA	Q13	39.21988	34,000 ft	136	-
FIX	AWY-HI	-119.10637	10,363 m		
RUFUS	Q13	41.43333	34,000 ft	139	-
FIX	AWY-HI	-120.00000	10,363 m		
PAWLI	Q13	43.18000	34,000 ft	112	-
FIX	AWY-HI	-120.93056	10,363 m		
PAAGE	Q11	46.42278	26,000 ft	197	-
FIX	AWY-HI	-121.74556	7,925 m		
KSEA	-	47.45019	0 ft	65	Seattle Tacoma Intl
APT	-	-122.31232	0 m		

KLAS

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 2,180 ft / 664 m
Location: 36.080700 -115.153000
Magnetic Var: 11.048 E

METAR

KLAS 130156Z 00000KT 10SM FEW100 33/M02 A2979 RMK A02 SLP066 T03281022 \$

TAF

KLAS 122320Z 1300/1406 09006KT P6SM FEW100 FM130300 23007KT P6SM SKC FM131400 VRB05KT P6SM SKC FM132000 16010G16K

Frequencies

REC - 132.40 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.00 MHz - CLEARANCE DELIVERY	GND - 121.10 MHz - LAS VEGAS GROUND
GND - 121.90 MHz - LAS VEGAS GROUND	TWR - 128.80 MHz - LAS VEGAS TOWER
TWR - 118.75 MHz - LAS VEGAS TOWER	TWR - 119.90 MHz - LAS VEGAS TOWER
APP - 125.60 MHz - LAS VEGAS APPROACH	APP - 125.02 MHz - LAS VEGAS APPROACH
DEP - 125.90 MHz - LAS VEGAS DEPARTURE	DEP - 133.95 MHz - LAS VEGAS DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	14,525 ft	89.92	CONCRETE	2,152 ft	0 ft
	46 m	4,427 m	78.88		656 m	0 m
26R	151 ft	14,525 ft	269.95	CONCRETE	1,414 ft	374 ft
	46 m	4,427 m	258.90		431 m	114 m
08R	151 ft	10,535 ft	89.92	CONCRETE	0 ft	381 ft
	46 m	3,211 m	78.87		0 m	116 m
26L	151 ft	10,535 ft	269.94	CONCRETE	0 ft	381 ft
	46 m	3,211 m	258.89		0 m	116 m
01R	151 ft	9,779 ft	24.82	CONCRETE	486 ft	400 ft
	46 m	2,981 m	13.77		148 m	122 m
19L	151 ft	9,779 ft	204.83	CONCRETE	876 ft	394 ft
	46 m	2,981 m	193.78		267 m	120 m
01L	151 ft	8,998 ft	24.82	CONCRETE	584 ft	400 ft
	46 m	2,743 m	13.78		178 m	122 m
19R	151 ft	8,998 ft	204.83	CONCRETE	0 ft	0 ft
	46 m	2,743 m	193.78		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICUA	110.10 MHz	18 nm	-	-	2,092 ft
				33 km	-		2,092 m
26R	DME	ILAS	110.30 MHz	18 nm	-	-	2,203 ft
				33 km	-		2,203 m
01L	LOC-ILS	ICUA	110.10 MHz	18 nm	24.83	-	2,180 ft
				33 km	13.78		2,180 m
26L	LOC-ILS	IRLE	111.50 MHz	18 nm	269.93	-	2,180 ft
				33 km	258.88		2,180 m
26R	LOC-ILS	ILAS	110.30 MHz	18 nm	269.94	-	2,180 ft
				33 km	258.89		2,180 m
01L	GS	ICUA	110.10 MHz	10 nm	24.83	3.40	2,180 ft
				19 km	13.78		2,180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	GS	IRLE	111.50 MHz	10 nm	269.93	3.00	2,180 ft
				19 km	258.88		2,180 m
26R	GS	ILAS	110.30 MHz	10 nm	269.94	3.00	2,180 ft
				19 km	258.89		2,180 m

KSEA

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 432 ft / 132 m
Location: 47.450200 -122.312000
Magnetic Var: 14.773 E

METAR

KSEA 130153Z 02013KT 10SM FEW040 SCT120 22/07 A2995 RMK A02 SLP146 T02220067

TAF

KSEA 122337Z 1300/1406 32007KT P6SM SCT200 FM130100 03011KT P6SM SCT120 BKN200 FM130800 11003KT P6SM BKN050 OVC100

Frequencies

REC - 118.00 MHz - SEATTLE ATIS	CLD - 128.00 MHz - SEATTLE CLEARANCE
GND - 121.70 MHz - SEATTLE GROUND	TWR - 119.90 MHz - SEATTLE TOWER
TWR - 120.95 MHz - SEATTLE TOWER	APP - 133.65 MHz - SEATTLE APPROACH
DEP - 120.10 MHz - SEATTLE DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	11,904 ft	180.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	165.57		0 m	122 m
34R	151 ft	11,904 ft	0.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	345.57		0 m	122 m
16C	151 ft	9,428 ft	180.34	CONCRETE	0 ft	400 ft
	46 m	2,874 m	165.57		0 m	122 m
34C	151 ft	9,428 ft	0.34	CONCRETE	0 ft	397 ft
	46 m	2,874 m	345.57		0 m	121 m
16R	151 ft	8,502 ft	180.34	CONCRETE	0 ft	200 ft
	46 m	2,591 m	165.57		0 m	61 m
34L	151 ft	8,502 ft	0.34	CONCRETE	0 ft	197 ft
	46 m	2,591 m	345.57		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	ISZI	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
16L	DME	ISNQ	110.30 MHz	18 nm	-	-	369 ft
				33 km	-		369 m
16R	DME	ICJL	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34C	DME	ITUC	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
34L	DME	IB EJ	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34R	DME	ISEA	110.30 MHz	18 nm	-	-	469 ft
				33 km	-		469 m
16C	LOC-ILS	ISZI	111.70 MHz	18 nm	180.34	-	355 ft
				33 km	165.56		355 m
16L	LOC-ILS	ISNQ	110.30 MHz	18 nm	180.34	-	338 ft
				33 km	165.57		338 m
16R	LOC-ILS	ICJL	110.75 MHz	18 nm	180.34	-	410 ft
				33 km	165.56		410 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34C	LOC-ILS	ITUC	111.70 MHz	18 nm	0.34	-	422 ft
				33 km	345.56		422 m
34L	LOC-ILS	IBEJ	110.75 MHz	18 nm	0.34	-	433 ft
				33 km	345.56		433 m
34R	LOC-ILS	ISEA	110.30 MHz	18 nm	0.34	-	428 ft
				33 km	345.57		428 m
16C	GS	ISZI	111.70 MHz	10 nm	180.67	3.00	418 ft
				19 km	165.90		418 m
16L	GS	ISNQ	110.30 MHz	10 nm	180.69	3.00	425 ft
				19 km	165.91		425 m
16R	GS	ICJL	110.75 MHz	10 nm	180.67	3.00	410 ft
				19 km	165.90		410 m
34C	GS	ITUC	111.70 MHz	10 nm	0.67	3.00	367 ft
				19 km	345.90		367 m
34L	GS	IBEJ	110.75 MHz	10 nm	0.67	3.00	360 ft
				19 km	345.90		360 m
34R	GS	ISEA	110.30 MHz	10 nm	0.69	2.75	355 ft
				19 km	345.91		355 m