


2024/05/11 0241Z

KORD APN19 DEGOS LESTA BARTU EBBR

3605.83 nm / 6678.00 km

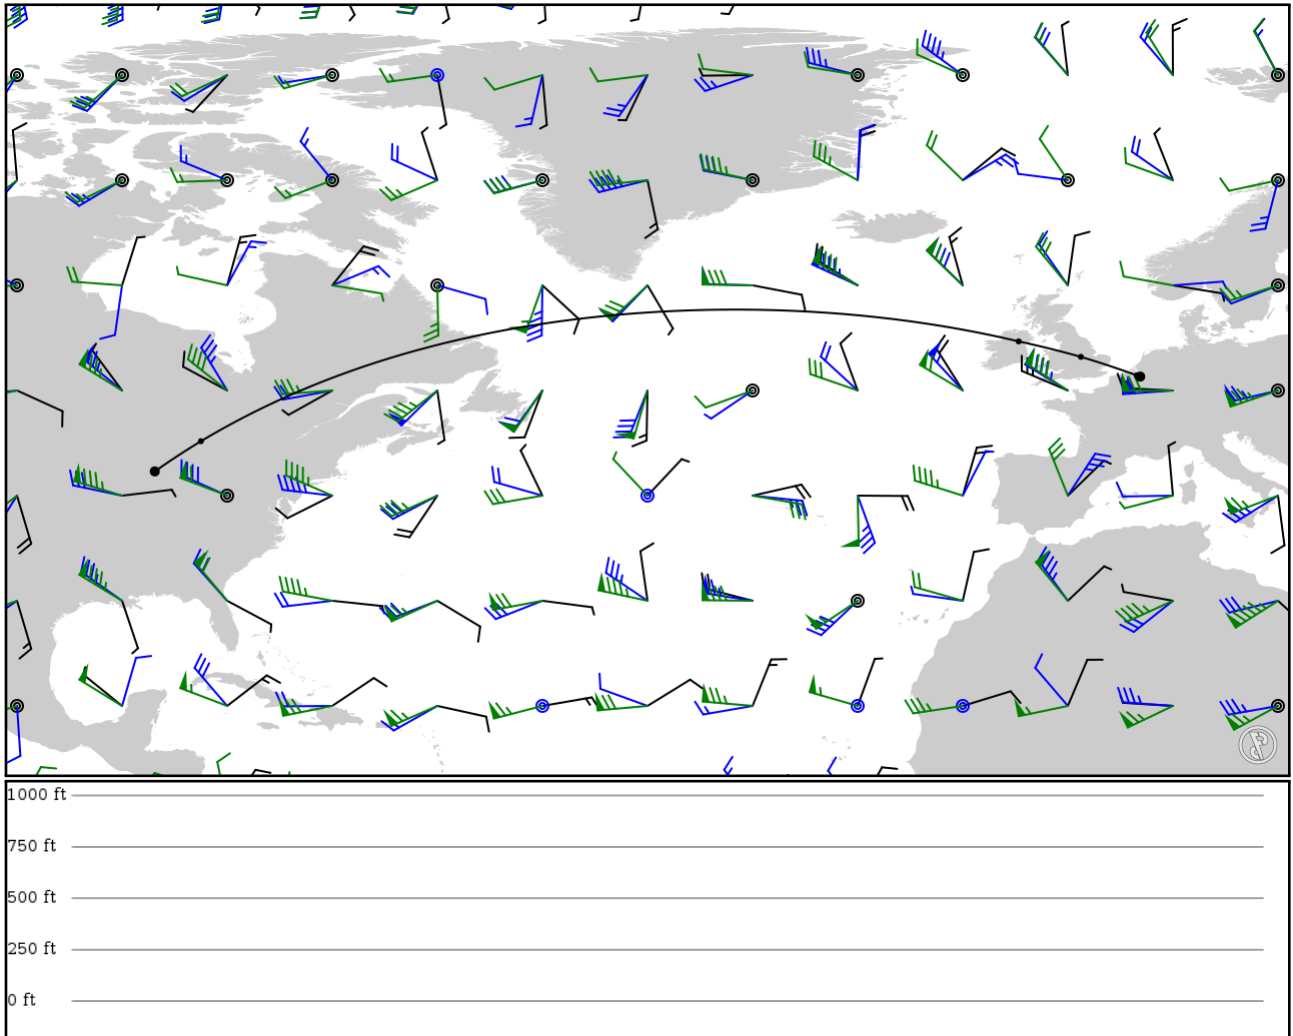

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KORD	-	42.00283	0 ft	-	-
APT	-	-87.92668	0 m		
APN19	-	44.83450	0 ft	253	-
FIX	-	-83.59985	0 m		
DEGOS	-	54.18917	0 ft	2891	-
FIX	-	-6.90639	0 m		
LESTA	-	52.74083	0 ft	225	-
FIX	-	-1.07194	0 m		
BARTU	-	51.00304	0 ft	220	-
FIX	-	4.17158	0 m		
EBBR	-	50.88681	0 ft	13	-
APT	-	4.49135	0 m		

KORD

Region: UNITED STATES
Timezone: AMERICA/CHICAGO
Runways: 6

Elevation: 680 ft / 207 m
Location: 41.973400 -87.906600
Magnetic Var: 4.111 W

METAR

KORD 110151Z 21006KT 10SM FEW060 FEW100 SCT250 17/08 A2976 RMK A02 SLP078 T01670078

TAF

KORD 102332Z 1100/1206 24012KT P6SM BKN050 TEMPO 1104/1106 30016G25KT 6SM -RA OVC050 FM111300 31015G25KT P6SM FEW

Frequencies

REC - 135.40 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 119.25 MHz - CLEARANCE DELIVERY	CLD - 121.60 MHz - CLEARANCE DELIVERY
GND - 118.05 MHz - O'HARE GROUND	GND - 121.67 MHz - O'HARE GROUND
GND - 121.75 MHz - O'HARE GROUND	GND - 121.90 MHz - O'HARE GROUND
GND - 124.12 MHz - O'HARE GROUND	GND - 134.12 MHz - O'HARE GROUND
TWR - 120.75 MHz - O'HARE TOWER	TWR - 121.15 MHz - O'HARE TOWER
TWR - 126.90 MHz - O'HARE TOWER	TWR - 127.92 MHz - O'HARE TOWER
TWR - 132.70 MHz - O'HARE TOWER	TWR - 128.15 MHz - O'HARE TOWER
TWR - 133.00 MHz - O'HARE TOWER	APP - 119.00 MHz - CHICAGO APPROACH
APP - 133.62 MHz - CHICAGO APPROACH	APP - 124.35 MHz - CHICAGO APPROACH
APP - 125.70 MHz - CHICAGO APPROACH	DEP - 125.00 MHz - CHICAGO DEPARTURE
DEP - 125.40 MHz - CHICAGO DEPARTURE	DEP - 127.40 MHz - CHICAGO DEPARTURE
DEP - 128.80 MHz - CHICAGO DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10C	200 ft	10,789 ft	89.85	CONCRETE	0 ft	397 ft
	61 m	3,289 m	93.96		0 m	121 m
28C	200 ft	10,789 ft	269.88	CONCRETE	0 ft	381 ft
	61 m	3,289 m	273.99		0 m	116 m
10L	151 ft	12,996 ft	89.87	CONCRETE	0 ft	394 ft
	46 m	3,961 m	93.99		0 m	120 m
28R	151 ft	12,996 ft	269.91	CONCRETE	0 ft	285 ft
	46 m	3,961 m	274.02		0 m	87 m
04R	151 ft	8,074 ft	41.40	CONCRETE	0 ft	850 ft
	46 m	2,461 m	45.51		0 m	259 m
22L	151 ft	8,074 ft	221.41	CONCRETE	0 ft	584 ft
	46 m	2,461 m	225.52		0 m	178 m
09R	151 ft	7,949 ft	89.98	CONCRETE	0 ft	148 ft
	46 m	2,423 m	94.09		0 m	45 m
27L	151 ft	7,949 ft	270.00	CONCRETE	0 ft	197 ft
	46 m	2,423 m	274.11		0 m	60 m
09L	151 ft	7,484 ft	89.99	CONCRETE	0 ft	397 ft
	46 m	2,281 m	94.10		0 m	121 m
27R	151 ft	7,484 ft	270.00	CONCRETE	0 ft	397 ft
	46 m	2,281 m	274.12		0 m	121 m
10R	151 ft	7,484 ft	89.85	CONCRETE	0 ft	400 ft
	46 m	2,281 m	93.96		0 m	122 m
28L	151 ft	7,484 ft	269.87	CONCRETE	0 ft	400 ft
	46 m	2,281 m	273.98		0 m	122 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	ISAJ	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
10L	DME	IMED	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
27L	DME	IIAC	110.50 MHz	18 nm	-	-	641 ft
				33 km	-		641 m
27R	DME	IABU	111.75 MHz	18 nm	-	-	668 ft
				33 km	-		668 m
28R	DME	ITSL	111.10 MHz	18 nm	-	-	678 ft
				33 km	-		678 m
04R	LOC-ILS	IFJU	110.10 MHz	18 nm	41.41	-	680 ft
				33 km	45.52		680 m
09L	LOC-ILS	ISAJ	111.75 MHz	18 nm	90.00	-	680 ft
				33 km	94.11		680 m
09R	LOC-ILS	IJAV	110.50 MHz	18 nm	89.99	-	680 ft
				33 km	94.10		680 m
10L	LOC-ILS	IMED	111.10 MHz	18 nm	89.89	-	680 ft
				33 km	94.00		680 m
10C	LOC-ILS	ISXH	108.95 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
10R	LOC-ILS	IIZJ	110.75 MHz	18 nm	89.86	-	680 ft
				33 km	93.97		680 m
22L	LOC-ILS	ILQQ	110.10 MHz	18 nm	221.41	-	680 ft
				33 km	225.52		680 m
27L	LOC-ILS	IIAC	110.50 MHz	18 nm	269.99	-	680 ft
				33 km	274.10		680 m
27R	LOC-ILS	IABU	111.75 MHz	18 nm	270.00	-	680 ft
				33 km	274.11		680 m
28L	LOC-ILS	IVQX	110.75 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28C	LOC-ILS	IVZE	108.95 MHz	18 nm	269.87	-	680 ft
				33 km	273.98		680 m
28R	LOC-ILS	ITSL	111.10 MHz	18 nm	269.88	-	680 ft
				33 km	273.99		680 m
04R	GS	IFJU	110.10 MHz	10 nm	41.41	3.00	680 ft
				19 km	45.52		680 m
09L	GS	ISAJ	111.75 MHz	10 nm	90.00	3.00	680 ft
				19 km	94.11		680 m
09R	GS	IJAV	110.50 MHz	10 nm	89.99	3.00	680 ft
				19 km	94.10		680 m
10L	GS	IMED	111.10 MHz	10 nm	89.89	3.00	680 ft
				19 km	94.00		680 m
10C	GS	ISXH	108.95 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
10R	GS	IIZJ	110.75 MHz	10 nm	89.86	3.00	680 ft
				19 km	93.97		680 m
22L	GS	ILQQ	110.10 MHz	10 nm	221.41	3.00	680 ft
				19 km	225.52		680 m
27L	GS	IIAC	110.50 MHz	10 nm	269.99	3.00	680 ft
				19 km	274.10		680 m
27R	GS	IABU	111.75 MHz	10 nm	270.00	3.00	680 ft
				19 km	274.11		680 m
28L	GS	IVQX	110.75 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28C	GS	IVZE	108.95 MHz	10 nm	269.87	3.00	680 ft
				19 km	273.98		680 m
28R	GS	ITSL	111.10 MHz	10 nm	269.88	3.00	680 ft
				19 km	273.99		680 m

EBBR

Region: BELGIUM
Timezone: EUROPE/BRUSSELS
Runways: 3

Elevation: 184 ft / 56 m
Location: 50.899900 4.492770
Magnetic Var: 2.002 E

METAR

EBBR 110220Z 36002KT CAVOK 11/09 Q1021 NOSIG

TAF

TAF EBBR 101703Z 1018/1124 05005KT CAVOK= TAF EDDF 101700Z 1018/1124 04005KT CAVOK

Frequencies

REC - 121.75 MHz - ATIS DEP
COM - 130.55 MHz - ABELAG UNICOM
GND - 118.05 MHz -
GND - 121.87 MHz -
TWR - 120.77 MHz -
APP - 120.10 MHz -
DEP - 126.62 MHz -

REC - 132.47 MHz - ATIS ARR
CLD - 121.95 MHz - CLNC DEL
GND - 121.70 MHz -
TWR - 118.60 MHz -
APP - 118.25 MHz -
APP - 122.50 MHz -

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	148 ft	11,917 ft	65.37	ASPHALT	843 ft	72 ft
	45 m	3,632 m	63.37		257 m	22 m
25R	148 ft	11,917 ft	245.41	ASPHALT	981 ft	0 ft
	45 m	3,632 m	243.41		299 m	0 m
07R	148 ft	10,522 ft	69.88	ASPHALT	407 ft	0 ft
	45 m	3,207 m	67.87		124 m	0 m
25L	148 ft	10,522 ft	249.91	ASPHALT	0 ft	13 ft
	45 m	3,207 m	247.91		0 m	4 m
01	164 ft	9,810 ft	14.44	ASPHALT	157 ft	0 ft
	50 m	2,990 m	12.44		48 m	0 m
19	164 ft	9,810 ft	194.45	ASPHALT	722 ft	43 ft
	50 m	2,990 m	192.45		220 m	13 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	DME	IBX	109.90 MHz	18 nm	-	-	184 ft
				33 km	-		184 m
19	DME	IBM	111.15 MHz	18 nm	-	-	184 ft
				33 km	-		184 m
25R	DME	IBR	108.90 MHz	18 nm	-	-	184 ft
				33 km	-		184 m
01	LOC-ILS	IBX	109.90 MHz	18 nm	14.45	-	184 ft
				33 km	12.45		184 m
19	LOC-ILS	IBM	111.15 MHz	18 nm	194.45	-	184 ft
				33 km	192.45		184 m
25L	LOC-ILS	IBL	110.35 MHz	18 nm	249.89	-	184 ft
				33 km	247.89		184 m
25R	LOC-ILS	IBR	108.90 MHz	18 nm	245.39	-	184 ft
				33 km	243.39		184 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	GS	IBX	109.90 MHz	10 nm	14.45	3.00	184 ft
				19 km	12.45		184 m
19	GS	IBM	111.15 MHz	10 nm	194.45	3.00	184 ft
				19 km	192.45		184 m
25L	GS	IBL	110.35 MHz	10 nm	249.89	3.00	184 ft
				19 km	247.89		184 m
25R	GS	IBR	108.90 MHz	10 nm	245.39	3.00	184 ft
				19 km	243.39		184 m