

KJFK

John F Kennedy Intl


EGLL

London Heathrow

2024/05/06 2207Z

KJFK BETTE ACK BRADD LIMRI XETBO EVRIN **UL607** NUMPO **UP2** OKESI BEDEK EGLL

3019.67 nm / 5592.43 km

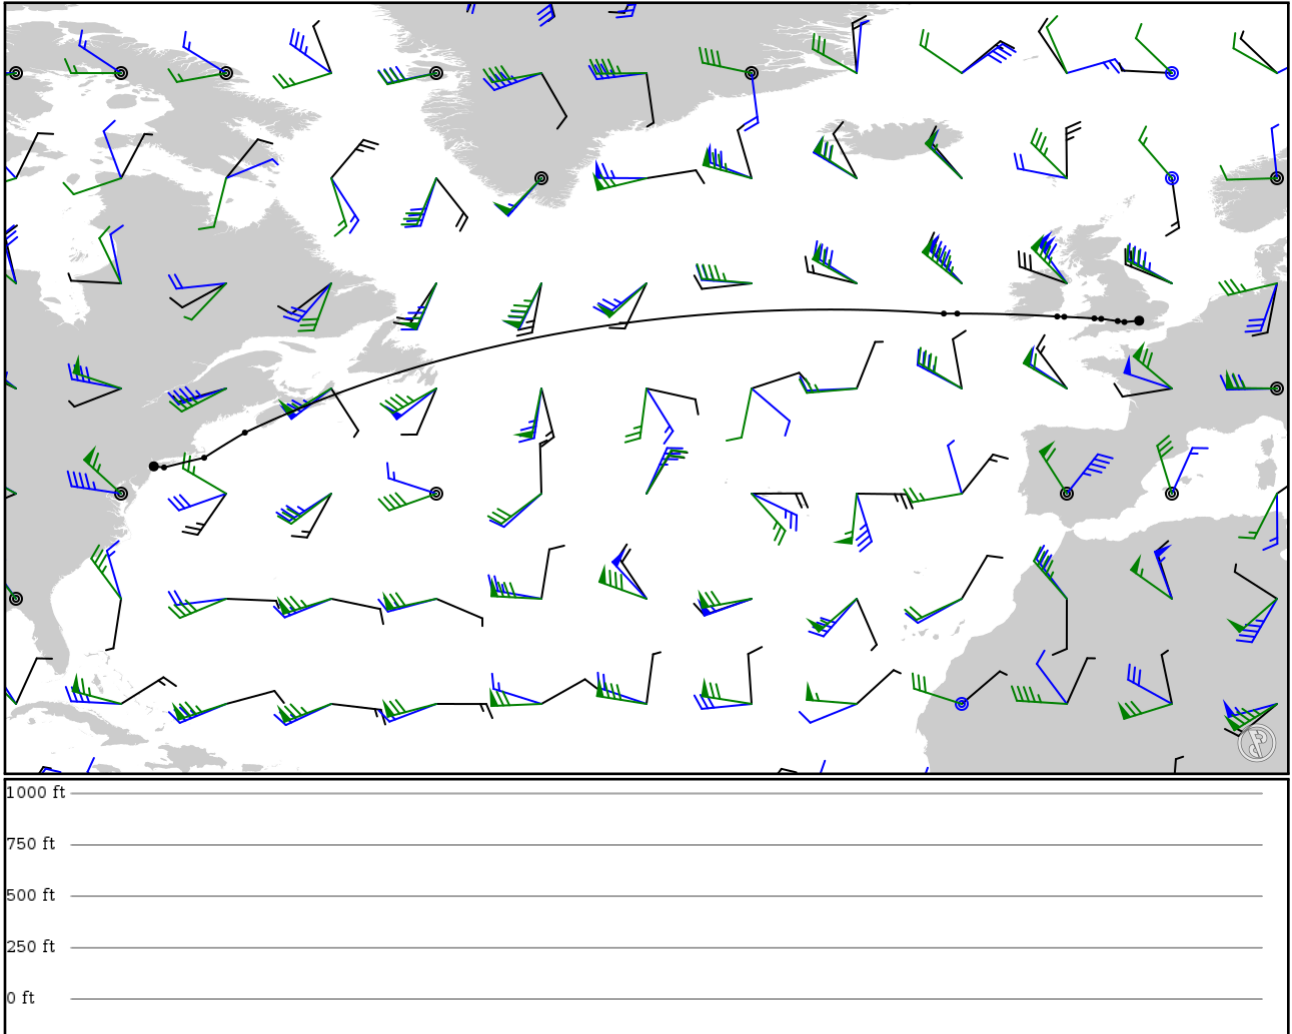

Notes

Requested: KJFK BETTE ACK BRADD N143A NATT LIMRI NATT XETBO EVRIN UL607 NUMPO UP2 OKESI Y3 BEDEK EGLL
Unmatched points: N143A NATT NATT Y3

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KJFK APT	-	40.63990 -73.77666	0 ft 0 m	-	John F Kennedy Intl
BETTE FIX	-	40.55924 -73.01172	0 ft 0 m	35	-
ACK VOR	-	41.28189 -70.02672	0 ft 0 m	142	NANTUCKET VOR-DME
BRADD FIX	-	43.15000 -67.00000	0 ft 0 m	175	-
LIMRI FIX	-	52.00000 -15.00000	0 ft 0 m	2124	-
XETBO FIX	-	52.00000 -14.00000	0 ft 0 m	36	-
EVRI FIX	-	51.78222 -6.56333	0 ft 0 m	275	-
STU30 FIX	UL607 AWY-HI	51.76083 -6.03611	0 ft 0 m	19	-
ABDUK FIX	UL607 AWY-HI	51.64278 -3.80028	0 ft 0 m	83	-
NUMPO FIX	UL607 AWY-HI	51.61000 -3.28361	0 ft 0 m	19	-
OKESI FIX	UP2 AWY-HI	51.44333 -2.06167	0 ft 0 m	46	-
BEDEK FIX	-	51.37083 -1.55861	0 ft 0 m	19	-
EGLL APT	-	51.47122 -0.46098	0 ft 0 m	41	London Heathrow

KJFK

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 12 ft / 4 m
Location: 40.640100 -73.776500
Magnetic Var: 12.820 W

METAR

KJFK 062051Z 19009KT 10SM SCT030 SCT050 BKN210 BKN250 20/16 A2991 RMK A02 SLP127 T02000161 56021

TAF

TAF AMD KJFK 061938Z 0620/0724 21008KT P6SM FEW020 FEW050 BKN200 FM070000 21005KT P6SM SCT004 BKN015 FM070400 2600

Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.49		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.50		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
31R	DME	IRTH	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm	30.68	-	12 ft
				33 km	43.50		12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm	30.67	-	12 ft
				33 km	43.49		12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm	120.87	-	12 ft
				33 km	133.69		12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm	210.67	-	12 ft
				33 km	223.49		12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm	210.68	-	12 ft
				33 km	223.50		12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm	300.84	-	12 ft
				33 km	313.66		12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm	300.87	-	12 ft
				33 km	313.69		12 m
04L	GS	IHIQ	110.90 MHz	10 nm	30.68	3.00	12 ft
				19 km	43.50		12 m
04R	GS	IJFK	109.50 MHz	10 nm	30.67	3.00	12 ft
				19 km	43.49		12 m
13L	GS	ITLK	111.50 MHz	10 nm	120.87	3.00	12 ft
				19 km	133.69		12 m
22L	GS	IIWY	110.90 MHz	10 nm	210.67	3.00	12 ft
				19 km	223.49		12 m
22R	GS	IJOC	109.50 MHz	10 nm	210.68	3.00	12 ft
				19 km	223.50		12 m
31L	GS	IMOH	111.35 MHz	10 nm	300.84	3.00	12 ft
				19 km	313.66		12 m
31R	GS	IRTH	111.50 MHz	10 nm	300.87	3.00	12 ft
				19 km	313.69		12 m

EGLL

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 2

Elevation: 83 ft / 25 m
Location: 51.471200 -0.460881
Magnetic Var: 0.376 E

METAR

EGLL 062120Z AUTO 05004KT 9000 -RA BKN034 BKN042 13/11 Q1013 NOSIG

TAF

TAF EGLL 061659Z 0618/0724 04005KT 9999 SCT040 TEMPO 0618/0622 6000 RA SHRA BKN012 PROB40 TEMPO 0618/0620 4000 +SH

Frequencies

REC - 128.07 MHz - HEATHROW INFORMATION	REC - 121.92 MHz - HEATHROW INFORMATION
CLD - 121.97 MHz - HEATHROW DELIVERY	GND - 121.70 MHz - HEATHROW GROUND
GND - 121.85 MHz - HEATHROW GROUND	GND - 121.90 MHz - HEATHROW GROUND
TWR - 118.50 MHz - HEATHROW TOWER	TWR - 118.70 MHz - HEATHROW TOWER
TWR - 124.47 MHz - HEATHROW TOWER	APP - 119.72 MHz - HEATHROW DIRECTOR
APP - 120.40 MHz - HEATHROW DIRECTOR	APP - 134.97 MHz - HEATHROW DIRECTOR
APP - 125.62 MHz - HEATHROW RADAR	APP - 127.52 MHz - HEATHROW RADAR
DEP - 120.52 MHz - HEATHROW DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	164 ft	12,770 ft	89.66	ASPHALT	1,007 ft	0 ft
	50 m	3,892 m	89.29		307 m	0 m
27R	164 ft	12,770 ft	269.70	ASPHALT	0 ft	177 ft
	50 m	3,892 m	269.33		0 m	54 m
09R	164 ft	11,975 ft	89.68	ASPHALT	1,004 ft	0 ft
	50 m	3,650 m	89.31		306 m	0 m
27L	164 ft	11,975 ft	269.72	ASPHALT	0 ft	95 ft
	50 m	3,650 m	269.35		0 m	29 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IAA	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09R	DME	IBB	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27L	DME	ILL	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27R	DME	IRR	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09L	LOC-ILS	IAA	110.30 MHz	18 nm	89.68	-	83 ft
				33 km	89.30		83 m
09R	LOC-ILS	IBB	109.50 MHz	18 nm	89.70	-	83 ft
				33 km	89.32		83 m
27L	LOC-ILS	ILL	109.50 MHz	18 nm	269.70	-	83 ft
				33 km	269.32		83 m
27R	LOC-ILS	IRR	110.30 MHz	18 nm	269.68	-	83 ft
				33 km	269.30		83 m
09L	GS	IAA	110.30 MHz	10 nm	89.68	3.00	83 ft
				19 km	89.30		83 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	GS	IBB	109.50 MHz	10 nm	89.70	3.00	83 ft
				19 km	89.32		83 m
27L	GS	ILL	109.50 MHz	10 nm	269.70	3.00	83 ft
				19 km	269.32		83 m
27R	GS	IRR	110.30 MHz	10 nm	269.68	3.00	83 ft
				19 km	269.30		83 m