

RPLL

Manille Ninoy Aquino Intl


RPVM

Mactan Cebu Intl

2024/05/03 2143Z

RPLL R2816 RPVM

307.72 nm / 569.89 km

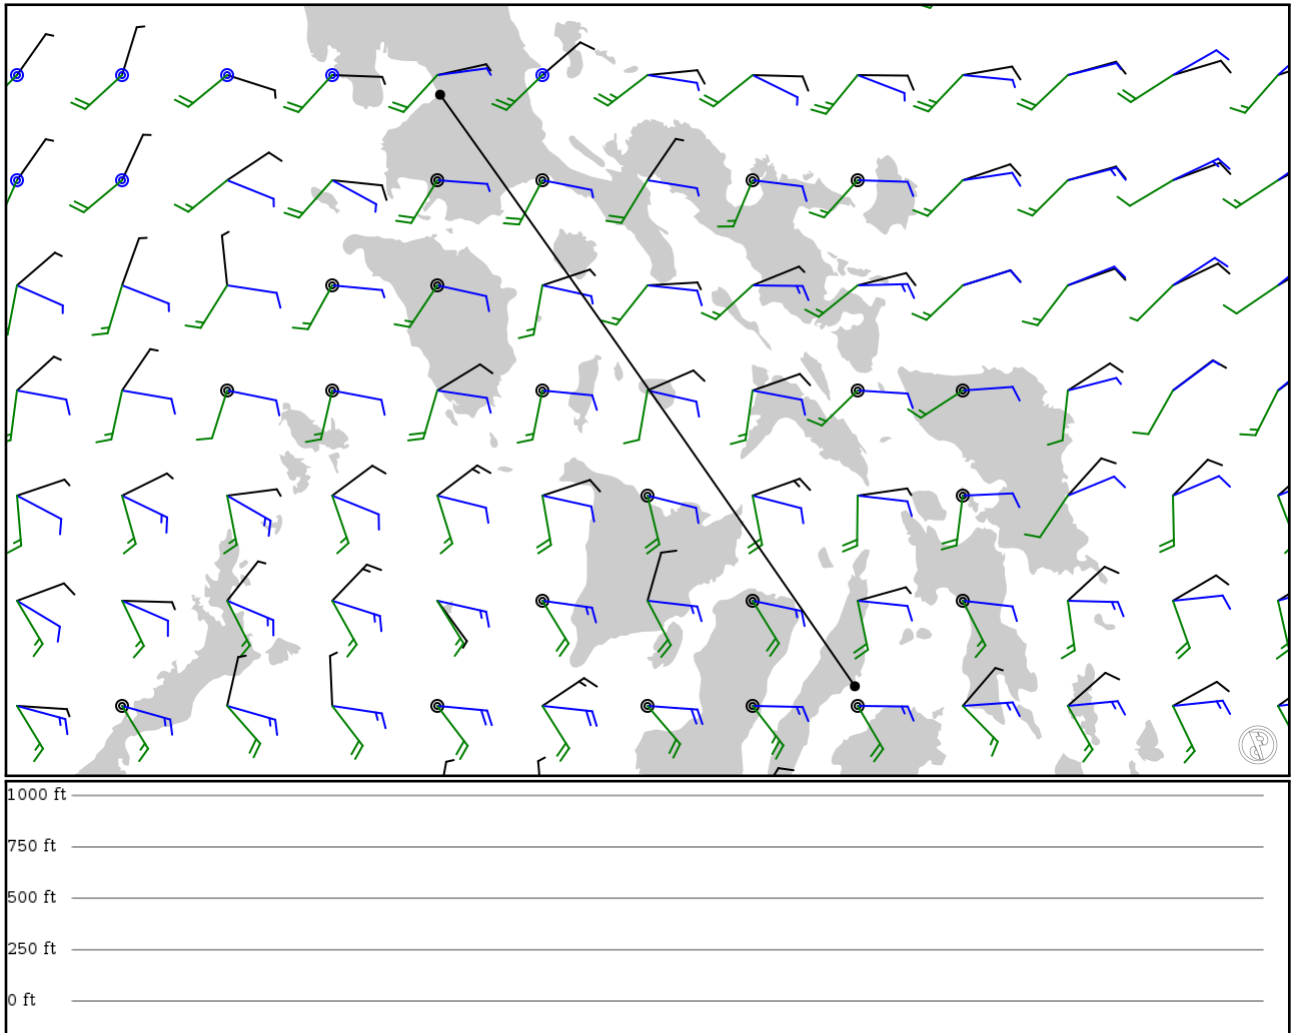

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RPLL	-	14.52421	0 ft	-	-
APT	-	121.00346	0 m		
R2816	-	10.29695	0 ft	307	-
FIX	-	123.96878	0 m		
RPVM	-	10.29695	0 ft	0	-
APT	-	123.96878	0 m		

RPLL

Region: PHILIPPINES
Timezone: ASIA/MANILA
Runways: 2

Elevation: 75 ft / 23 m
Location: 14.511300 121.013000
Magnetic Var: 2.777 W

METAR

RPLL 032100Z VRB02KT 9999 FEW025 28/23 Q1009 NOSIG RMK A2980

TAF

TAF RPLL 031700Z 0318/0424 11007KT 9999 FEW025 TX36/0406Z TN28/0321Z TEMPO 0405/0411 13013G23KT SCT025

Frequencies

REC - 126.40 MHz - ATIS	APP - 119.70 MHz - MANILA APPROACH
APP - 121.10 MHz - MANILA APPROACH	APP - 127.70 MHz - MANILA APPROACH
TWR - 118.10 MHz - MANILA TOWER	GND - 121.80 MHz - MANILA GROUND
GND - 121.70 MHz - MANILA RAMP	GND - 128.80 MHz - MANILA RAMP
GND - 123.25 MHz - MANILA RAMP	GND - 121.35 MHz - MANILA RAMP
CLD - 125.10 MHz - MANILA CLEARANCE DELIVERY	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	197 ft	11,742 ft	60.15	ASPHALT	545 ft	0 ft
	60 m	3,579 m	62.92		166 m	0 m
24	197 ft	11,742 ft	240.15	ASPHALT	0 ft	0 ft
	60 m	3,579 m	242.93		0 m	0 m
13	144 ft	7,729 ft	134.96	ASPHALT	804 ft	0 ft
	44 m	2,356 m	137.73		245 m	0 m
31	144 ft	7,729 ft	314.96	ASPHALT	0 ft	0 ft
	44 m	2,356 m	317.74		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	IML	109.10 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
24	DME	IMA	109.90 MHz	18 nm	-	-	50 ft
				33 km	-		50 m
06	LOC-ILS	IML	109.10 MHz	18 nm	60.15	-	75 ft
				33 km	62.93		75 m
24	LOC-ILS	IMA	109.90 MHz	18 nm	240.15	-	75 ft
				33 km	242.93		75 m
06	GS	IML	109.10 MHz	10 nm	60.15	3.01	75 ft
				19 km	62.93		75 m
24	GS	IMA	109.90 MHz	10 nm	240.15	3.06	75 ft
				19 km	242.93		75 m

RPVM

Region: PHILIPPINES
Timezone: ASIA/MANILA
Runways: 1

Elevation: 35 ft / 11 m
Location: 10.307600 123.979000
Magnetic Var: 2.087 W

METAR

RPVM 032100Z VRB01KT 9999 FEW020 BKN100 27/24 Q1009 NOSIG RMK A2980

TAF

TAF RPVM 031700Z 0318/0424 05007KT 9999 FEW020 TEMPO 0318/0324 34005KT

Frequencies

APP - 121.20 MHz - MACTAN APPROACH
TWR - 118.10 MHz - MACTAN TOWER
REC - 126.60 MHz - MACTAN ATIS

APP - 124.70 MHz - MACTAN APPROACH
GND - 121.80 MHz - MACTAN GROUND

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	148 ft	10,851 ft	44.68	ASPHALT	0 ft	207 ft
	45 m	3,308 m	46.76		0 m	63 m
22	148 ft	10,851 ft	224.68	ASPHALT	0 ft	194 ft
	45 m	3,308 m	226.77		0 m	59 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	IMT	109.90 MHz	18 nm	-	-	31 ft
				33 km	-		31 m
22	DME	IMCT	109.10 MHz	18 nm	-	-	36 ft
				33 km	-		36 m