

# KISP

Long Island Mac Arthur


# KFLL

Fort Lauderdale-Hollywood Intl

2024/05/18 0326Z

KISP HOGGS **V44** SIE **J121** ORF **J174** DIW **AR18** OZENA **AR23** CANIT **M202** ADOOR **BR65V** STIFF **A699** PERMT KFLL

976.87 nm / 1809.16 km

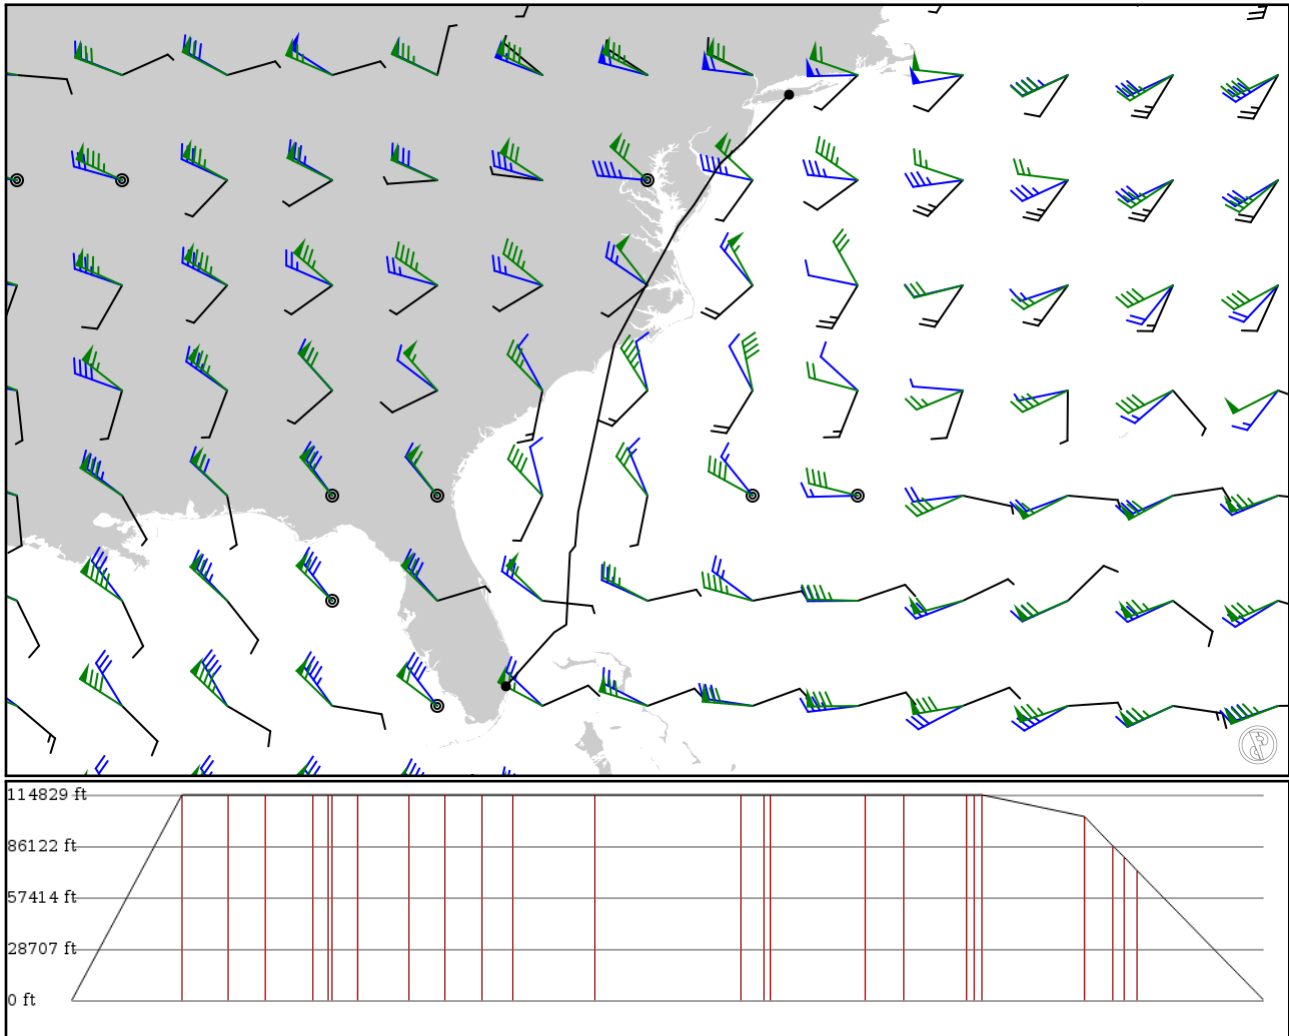

## Notes

Basic altitude profile:

- Ascent Rate: 3000ft/min
- Ascent Speed: 290kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KISP APT	-	40.79530 -73.09940	0 ft 0 m	-	Long Island Mac Arthur
HOGGS FIX	-	39.58280 -74.27060	35,000 ft 10,668 m	90	-
SIE VOR	V44 AWY-LO	39.09550 -74.80030	35,000 ft 10,668 m	38	SEA
RADD FIX	J121 AWY-HI	38.64860 -75.08850	35,000 ft 10,668 m	30	-
SWL VOR	J121 AWY-HI	38.05660 -75.46390	35,000 ft 10,668 m	39	SNOW
DUNFE FIX	J121 AWY-HI	37.88860 -75.59150	35,000 ft 10,668 m	11	-
KALDA FIX	J121 AWY-HI	37.84200 -75.62650	35,000 ft 10,668 m	3	-
SAWED FIX	J121 AWY-HI	37.53350 -75.85810	35,000 ft 10,668 m	21	-
ORF VOR	J121 AWY-HI	36.89190 -76.20030	35,000 ft 10,668 m	41	NORFOLK
EDDYS FIX	J174 AWY-HI	36.44040 -76.45010	35,000 ft 10,668 m	29	-
GILMA FIX	J174 AWY-HI	35.97670 -76.70340	35,000 ft 10,668 m	30	-
CLAPY FIX	J174 AWY-HI	35.59470 -76.90950	35,000 ft 10,668 m	25	-
DIW NDB	J174 AWY-HI	34.56850 -77.45290	35,000 ft 10,668 m	67	DIXON
PANAL FIX	AR18 AWY-HI	32.60910 -77.87580	35,000 ft 10,668 m	119	-
MILOE FIX	AR18 AWY-HI	32.29110 -77.94440	35,000 ft 10,668 m	19	-
LURKS FIX	AR18 AWY-HI	32.21610 -77.96070	35,000 ft 10,668 m	4	-
LANIE FIX	AR18 AWY-HI	30.94160 -78.23560	35,000 ft 10,668 m	77	-
OZENA FIX	AR18 AWY-HI	30.41940 -78.34830	35,000 ft 10,668 m	31	-
CANIT FIX	AR23 AWY-HI	29.56250 -78.42580	35,000 ft 10,668 m	51	-
ETECK FIX	M202 AWY-HI	29.48570 -78.48730	35,000 ft 10,668 m	5	-
ADOOR FIX	M202 AWY-HI	29.40010 -78.55570	35,000 ft 10,668 m	6	-
ELDER FIX	BR65V AWY-HI	27.99120 -78.62700	31,300 ft 9,540 m	84	-
STIFF FIX	BR65V AWY-HI	27.60520 -78.64610	26,300 ft 8,016 m	23	-
RAMJT FIX	A699 AWY-HI	27.52040 -78.78000	24,400 ft 7,437 m	8	-
PERMT FIX	A699 AWY-HI	27.41420 -78.94730	22,100 ft 6,736 m	10	-
KFLL APT	-	26.07140 -80.14950	0 ft 0 m	103	Fort Lauderdale-Hollywood Intl

## KISP

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 3

Elevation: 99 ft / 30 m  
Location: 40.796200 -73.099500  
Magnetic Var: 13.146 W

## METAR

KISP 180256Z 00000KT 10SM FEW080 OVC210 16/13 A2995 RMK A02 SLP140 T01560128 55001

## TAF

KISP 180230Z 1803/1824 03005KT P6SM FEW080 FM181500 02008KT P6SM BKN025 FM181900 04009KT P6SM BKN035

## Frequencies

REC - 120.72 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 121.85 MHz - CLEARANCE DELIVERY	TWR - 119.30 MHz - LONG ISLAND TOWER
GND - 135.30 MHz - LONG ISLAND GROUND	APP - 120.05 MHz - NEW YORK APPROACH
DEP - 120.05 MHz - NEW YORK DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	7,004 ft	44.88	ASPHALT	0 ft	200 ft
	46 m	2,135 m	58.03		0 m	61 m
24	150 ft	7,004 ft	224.90	ASPHALT	0 ft	200 ft
	46 m	2,135 m	238.04		0 m	61 m
15R	150 ft	5,184 ft	135.13	ASPHALT	0 ft	0 ft
	46 m	1,580 m	148.28		0 m	0 m
33L	150 ft	5,184 ft	315.14	ASPHALT	0 ft	200 ft
	46 m	1,580 m	328.29		0 m	61 m
15L	75 ft	3,174 ft	135.10	ASPHALT	0 ft	0 ft
	23 m	967 m	148.25		0 m	0 m
33R	75 ft	3,174 ft	315.11	ASPHALT	0 ft	0 ft
	23 m	967 m	328.25		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IISP	108.30 MHz	18 nm	44.89	-	99 ft
				33 km	58.04		99 m
24	LOC-ILS	IRXN	108.30 MHz	18 nm	224.89	-	99 ft
				33 km	238.04		99 m
06	GS	IISP	108.30 MHz	10 nm	44.89	3.00	99 ft
				19 km	58.04		99 m
24	GS	IRXN	108.30 MHz	10 nm	224.89	3.00	99 ft
				19 km	238.04		99 m

## KFLL

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 2

Elevation: 65 ft / 20 m  
Location: 26.071300 -80.149500  
Magnetic Var: 7.392 W

## METAR

KFLL 180253Z 20007KT 10SM CLR 29/25 A2994 RMK A02 SLP138 T02940250 51011

## TAF

KFLL 180316Z 1803/1906 VRB04KT P6SM FEW030 FEW250 FM181500 17011KT P6SM FEW030 SCT060 BKN250 FM181800 16013KT P6S

## Frequencies

REC - 135.00 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.40 MHz - CLEARANCE DELIVERY	GND - 121.40 MHz - FORT LAUDERDALE GROUND
GND - 121.70 MHz - FORT LAUDERDALE GROUND	TWR - 119.30 MHz - FORT LAUDERDALE TOWER
TWR - 120.20 MHz - FORT LAUDERDALE TOWER	APP - 118.10 MHz - MIAMI APPROACH
APP - 119.45 MHz - MIAMI APPROACH	APP - 133.77 MHz - MIAMI APPROACH
DEP - 128.60 MHz - MIAMI DEPARTURE	DEP - 126.05 MHz - MIAMI DEPARTURE
DEP - 119.70 MHz - MIAMI DEPARTURE	DEP - 119.45 MHz - MIAMI DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	151 ft	9,008 ft	90.36	CONCRETE	577 ft	341 ft
	46 m	2,746 m	97.75		176 m	104 m
28R	151 ft	9,008 ft	270.37	CONCRETE	607 ft	453 ft
	46 m	2,746 m	277.76		185 m	138 m
10R	151 ft	8,006 ft	90.36	CONCRETE	0 ft	597 ft
	46 m	2,440 m	97.75		0 m	182 m
28L	151 ft	8,006 ft	270.37	CONCRETE	0 ft	604 ft
	46 m	2,440 m	277.76		0 m	184 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	ILHI	110.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
28R	DME	IUDL	110.70 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
10L	LOC-LOC	ILHI	110.10 MHz	18 nm	90.36	-	62 ft
				33 km	97.75		62 m
10R	LOC-LOC	IFLL	111.75 MHz	18 nm	90.33	-	62 ft
				33 km	97.72		62 m
28L	LOC-LOC	IADI	111.75 MHz	18 nm	270.33	-	62 ft
				33 km	277.72		62 m
28R	LOC-LOC	IUDL	110.70 MHz	18 nm	270.36	-	62 ft
				33 km	277.75		62 m
10L	GS	ILHI	110.10 MHz	10 nm	90.36	3.00	62 ft
				19 km	97.75		62 m
10R	GS	IFLL	111.75 MHz	10 nm	90.33	3.00	62 ft
				19 km	97.72		62 m
28L	GS	IADI	111.75 MHz	10 nm	270.33	3.00	62 ft
				19 km	277.72		62 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28R	GS	IUDL	110.70 MHz	10 nm	270.36	3.00	62 ft
				19 km	277.75		62 m