

MUHA

Havana Jose Marti Intl


MYNN

Nassau Intl

2024/05/08 0623Z

MUHA UVA **R628** ZOLLA MYNN

302.75 nm / 560.70 km

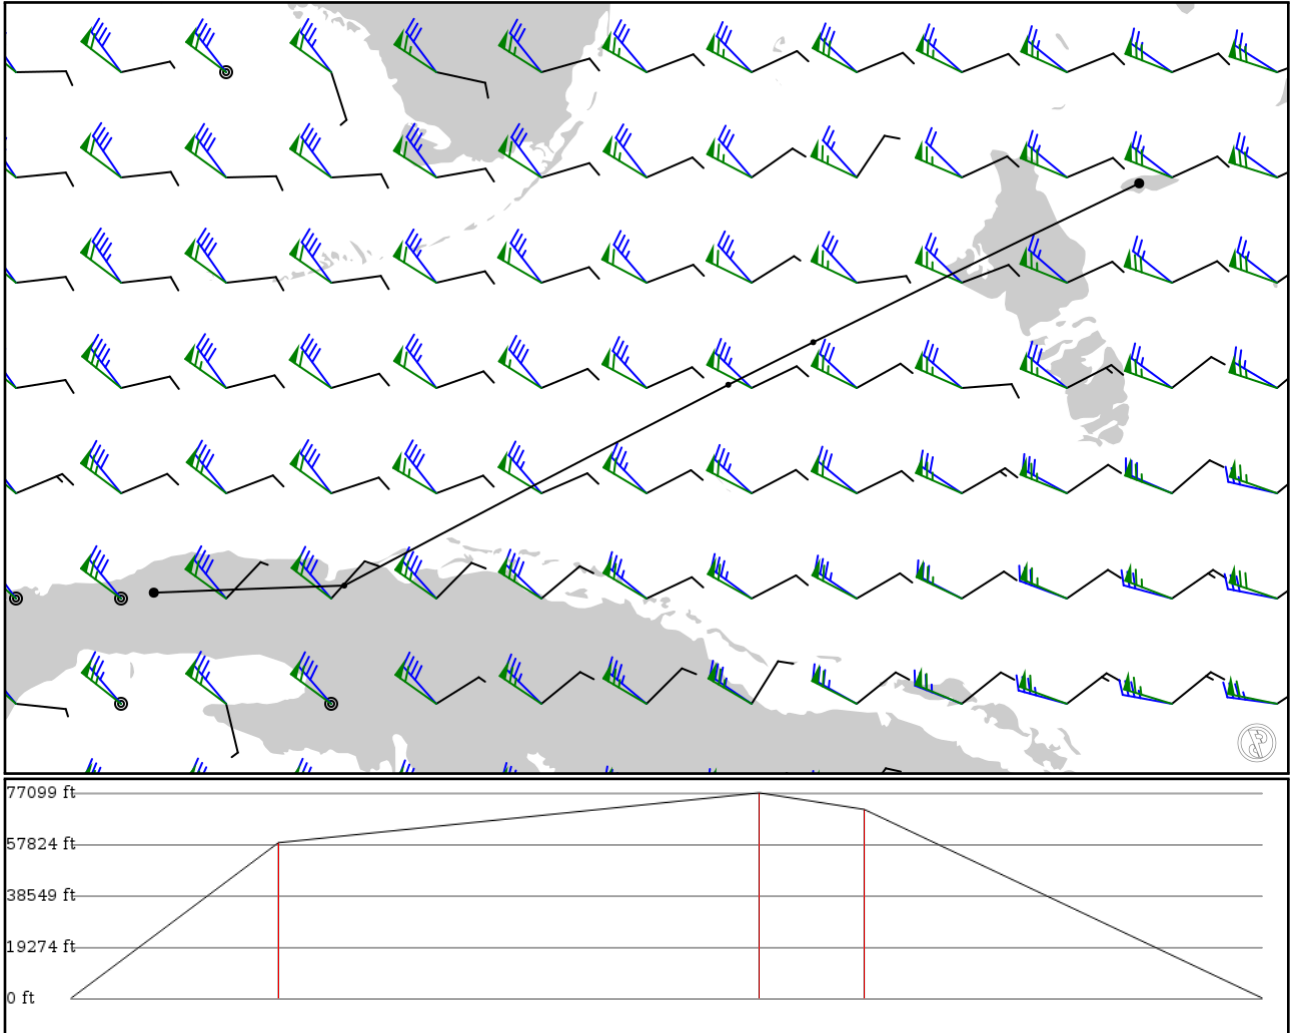

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
MUHA APT	-	22.98915 -82.40909	0 ft 0 m	-	Havana Jose Marti Intl
UVA VOR	-	23.02469 -81.45358	17,800 ft 5,425 m	52	VARDER VOR-DME
TANIA FIX	R628 AWY-LO	24.03009 -79.52758	23,500 ft 7,163 m	122	-
ZOLLA FIX	R628 AWY-HI	24.24304 -79.10148	21,600 ft 6,584 m	26	-
MYNN APT	-	25.03860 -77.46662	0 ft 0 m	101	Nassau Intl

MUHA

Region: CUBA

Timezone: AMERICA/HAVANA

Runways: 1

Elevation: 208 ft / 63 m

Location: 22.989100 -82.409100

Magnetic Var: 5.657 W

METAR

MUHA 080550Z 09006KT 060V120 9000 FEW040 25/23 Q1013

TAF

TAF MUHA 080500Z 0806/0906 10006KT 9000 SCT030 BECMG 0814/0816 12008KT BECMG 0819/0821 19010KT BECMG 0902/0904 VR

Frequencies

REC - 132.50 MHz - ATIS

TWR - 118.10 MHz - MARTI TOWER

GND - 121.90 MHz - MARTI GROUND

APP - 120.30 MHz - HABANA APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	151 ft	13,135 ft	54.19	ASPHALT	0 ft	469 ft
	46 m	4,004 m	59.85		0 m	143 m
24	151 ft	13,135 ft	234.21	ASPHALT	0 ft	197 ft
	46 m	4,004 m	239.86		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	IHA	110.50 MHz	18 nm	54.21	-	209 ft
				33 km	59.87		209 m
06	GS	IHA	110.50 MHz	10 nm	54.21	3.00	209 ft
				19 km	59.87		209 m

MYNN

Region: BAHAMAS
Timezone: AMERICA/NASSAU
Runways: 2

Elevation: 16 ft / 5 m
Location: 25.038700 -77.466800
Magnetic Var: 8.780 W

METAR

MYNN 080600Z 10005KT 9999 SCT020 24/22 A2996

TAF

TAF MYNN 080530Z 0806/0906 12004KT CAVOK

Frequencies

REC - 118.70 MHz - ATIS	CLD - 118.30 MHz - NASSAU CLEARANCE
GND - 121.70 MHz - NASSAU GROUND	TWR - 119.50 MHz - NASSAU TOWER
APP - 121.00 MHz - NASSAU APPROACH	APP - 125.30 MHz - NASSAU APPROACH
DEP - 121.00 MHz - NASSAU DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
14	151 ft	11,136 ft	134.80	CONCRETE	210 ft	0 ft
	46 m	3,394 m	143.58		64 m	0 m
32	151 ft	11,136 ft	314.81	CONCRETE	0 ft	0 ft
	46 m	3,394 m	323.59		0 m	0 m
10	151 ft	8,282 ft	89.67	CONCRETE	0 ft	0 ft
	46 m	2,524 m	98.45		0 m	0 m
28	151 ft	8,282 ft	269.68	CONCRETE	0 ft	0 ft
	46 m	2,524 m	278.46		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
14	LOC-ILS	IZQA	110.10 MHz	18 nm	134.83	-	7 ft
				33 km	143.61		7 m
14	GS	IZQA	110.10 MHz	10 nm	135.66	3.00	8 ft
				19 km	144.44		8 m