


2024/05/11 2147Z

NTAA TAF **G575** FICKY **C1177** MALIT KLAX

3584.64 nm / 6638.76 km

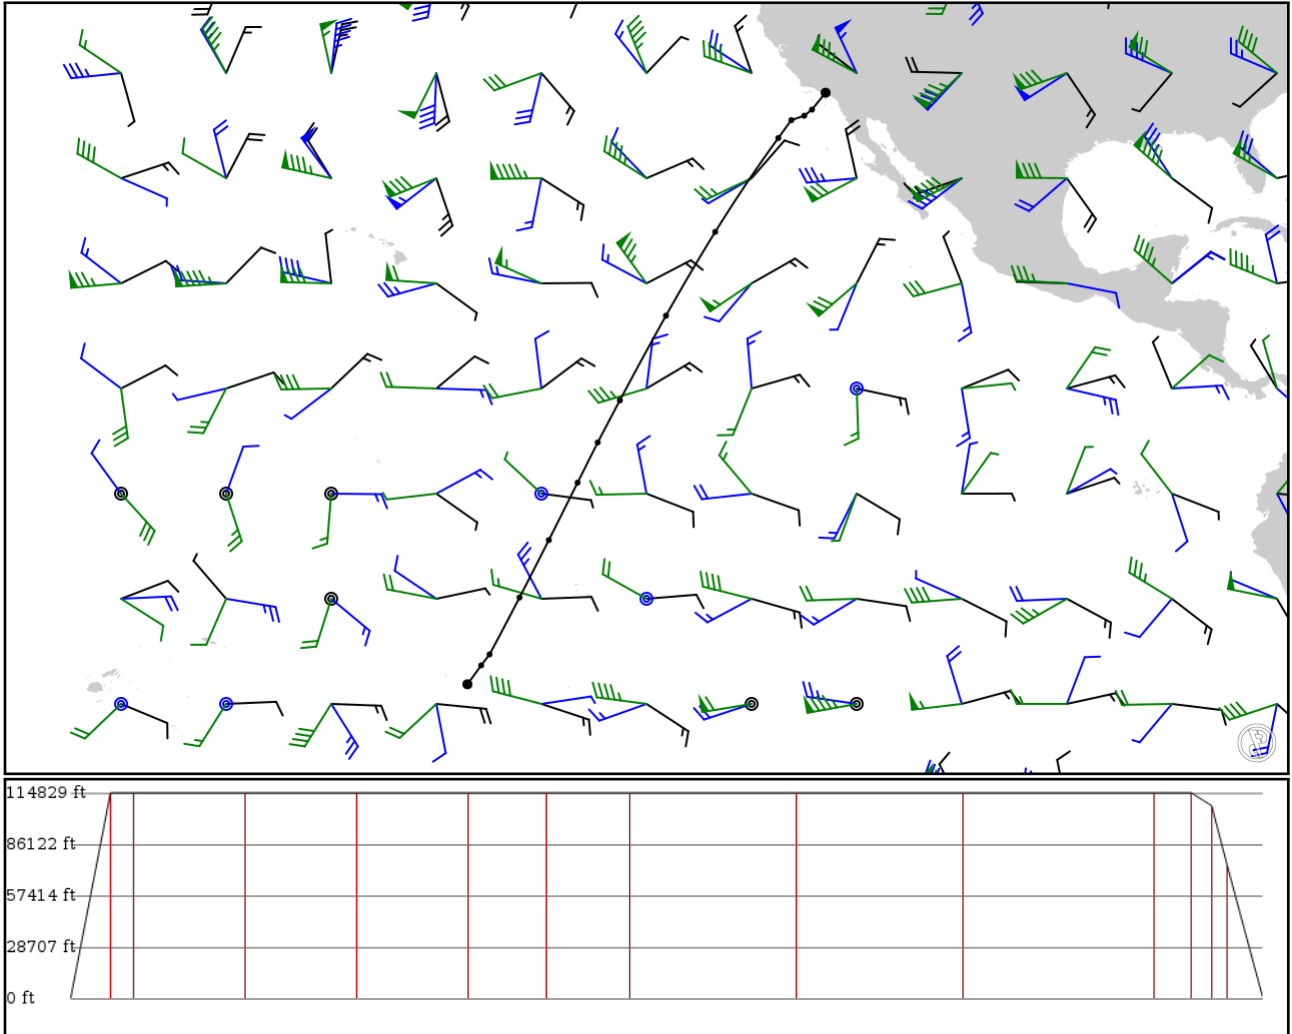

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
NTAA	-	-17.55380	0 ft	-	Faaa Int'l
APT	-	-149.60700	0 m		
TAF	-	-17.54710	100 ft	0	TAHITI
VOR	-	-149.60200	30 m		
ORARE	G575	-15.90810	35,000 ft	120	-
FIX	AWY-HI	-148.40600	10,668 m		
RAN	G575	-14.95040	35,000 ft	71	RANGIROA
VOR	AWY-HI	-147.67400	10,668 m		
ROBKO	G575	-10.00000	35,000 ft	334	-
FIX	AWY-HI	-145.06700	10,668 m		
RUTAK	G575	-5.00000	35,000 ft	336	-
FIX	AWY-HI	-142.51400	10,668 m		
REVRO	G575	0.00000	35,000 ft	335	-
FIX	AWY-HI	-140.00800	10,668 m		
WIBIG	G575	3.50000	35,000 ft	235	-
FIX	AWY-HI	-138.25500	10,668 m		
CINTO	G575	7.16167	35,000 ft	248	-
FIX	AWY-HI	-136.32600	10,668 m		
BIGBY	G575	14.53440	35,000 ft	502	-
FIX	AWY-HI	-132.31100	10,668 m		
APIDD	G575	21.82940	35,000 ft	501	-
FIX	AWY-HI	-128.02200	10,668 m		
HILCO	G575	30.00000	35,000 ft	573	-
FIX	AWY-HI	-122.52500	10,668 m		
FICKY	G575	31.55760	35,000 ft	110	-
FIX	AWY-HI	-121.39200	10,668 m		
ROSIN	C1177	31.94210	32,800 ft	61	-
FIX	AWY-HI	-120.26800	9,997 m		
MALIT	C1177	32.47560	22,700 ft	47	-
FIX	AWY-HI	-119.59100	6,919 m		
KLAX	-	33.94320	0 ft	106	Los Angeles Intl
APT	-	-118.40800	0 m		

NTAA

Region: FRENCH POLYNESIA
Timezone: PACIFIC/TAHITI
Runways: 1

Elevation: 5 ft / 2 m
Location: -17.553700 -149.607000
Magnetic Var: 12.883 E

METAR

NTAA 112130Z AUTO 24005KT 9999 FEW025 30/24 Q1013 TEMPO 04015KT

TAF

TAF AMD NTAA 112044Z 1120/1224 22005KT 9999 FEW025 TEMPO 1121/1202 04015KT BECMG 1202/1204 VRB05KT BECMG 1208/121

Frequencies

REC - 128.80 MHz - ATIS
TWR - 118.10 MHz - TAHITI TOWER

GND - 121.90 MHz - TAHITI GROUND
APP - 121.30 MHz - TAHITI APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04	148 ft	11,238 ft	54.10	ASPHALT	1,037 ft	0 ft
	45 m	3,425 m	41.22		316 m	0 m
22	148 ft	11,238 ft	234.10	ASPHALT	577 ft	0 ft
	45 m	3,425 m	221.21		176 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04	DME	PT	109.90 MHz	18 nm	-	-	59 ft
				33 km	-		59 m
04	LOC-ILS	PT	109.90 MHz	18 nm	54.05	-	20 ft
				33 km	41.17		20 m
04	GS	PT	109.90 MHz	10 nm	54.06	3.00	59 ft
				19 km	41.18		59 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.441 E

METAR

KLAX 112053Z 25009KT 10SM BKN011 BKN017 16/12 A2994 RMK A02 SLP138 T01610122 58005 \$

TAF

KLAX 112034Z 1121/1224 25012KT P6SM BKN012 FM120300 25006KT P6SM OVC008 FM120900 VRB03KT P6SM OVC006 FM121600 VRB

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.52		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m