


2024/05/06 0223Z

KTPA LBV KMIA

177.66 nm / 329.02 km

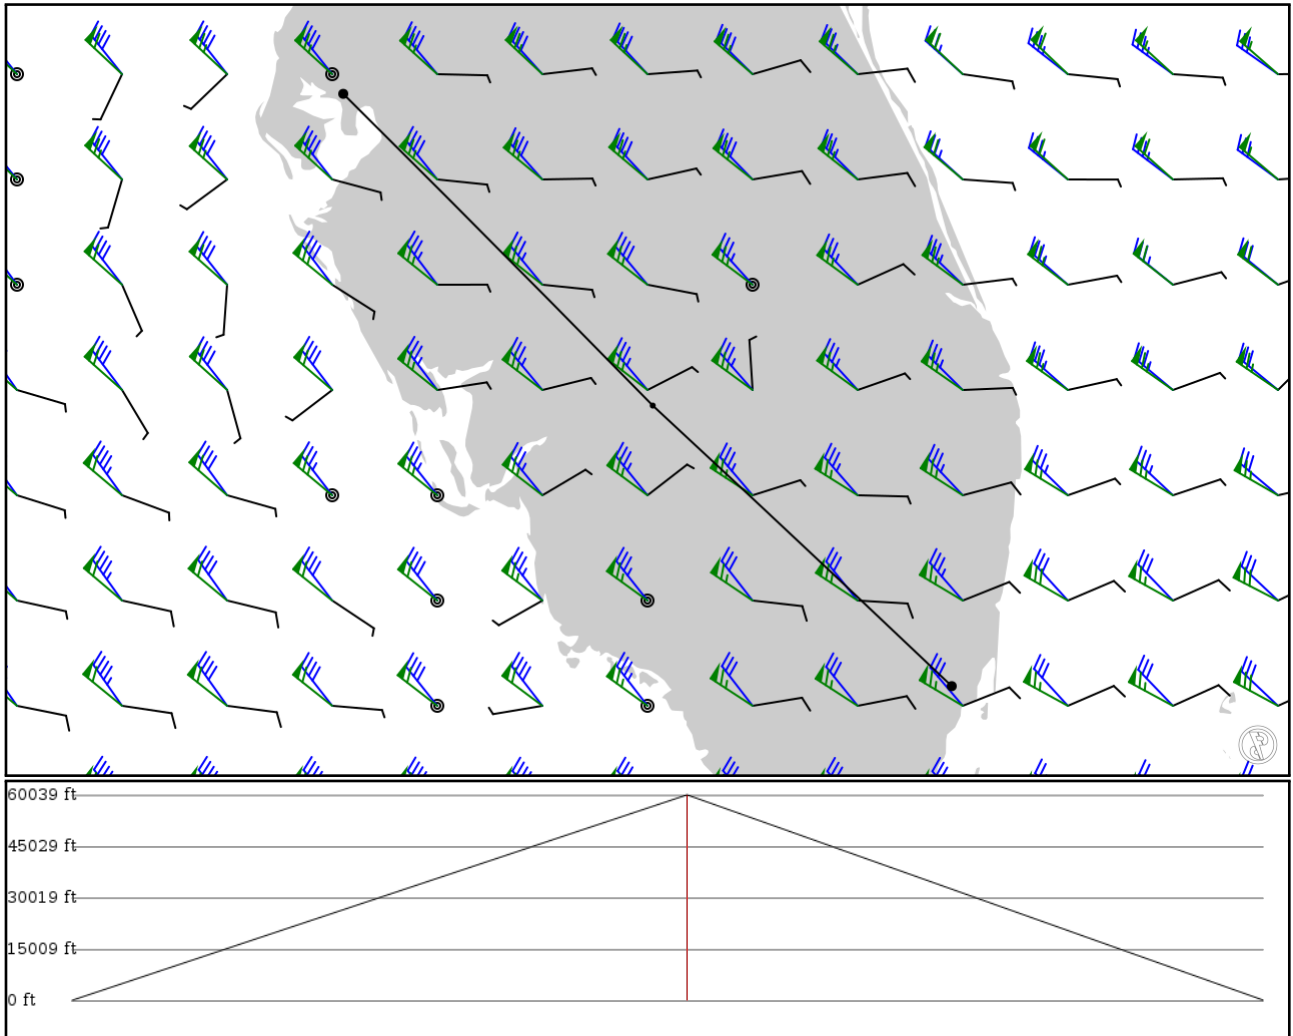

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KTPA	-	27.97490	0 ft	-	Tampa Intl
APT	-	-82.53190	0 m		
LBV	-	26.82820	18,300 ft	91	LA
VOR	-	-81.39140	5,578 m		
KMIA	-	25.79620	0 ft	85	Miami Intl
APT	-	-80.28970	0 m		

## KTPA

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 3

Elevation: 26 ft / 8 m  
Location: 27.974900 -82.531900  
Magnetic Var: 6.194 W

## METAR

KTPA 060153Z 01007KT 10SM FEW035 BKN060 BKN110 26/21 A3006 RMK A02 RAB22E33 SLP179 P0000 T02610211

## TAF

KTPA 052345Z 0600/0706 29009KT P6SM VCTS SCT030CB BKN100 FM060200 VRB04KT P6SM FEW050 SCT250 FM061200 16006KT P6S

## Frequencies

REC - 126.45 MHz - D-ATIS  
COM - 122.95 MHz - UNICOM  
GND - 121.70 MHz - TAMPA GROUND  
TWR - 119.50 MHz - TAMPA TOWER  
APP - 118.15 MHz - TAMPA APPROACH  
APP - 119.65 MHz - TAMPA APPROACH  
APP - 118.80 MHz - TAMPA APPROACH

REC - 128.47 MHz - D-ATIS  
CLD - 133.60 MHz - CLEARANCE DELIVERY  
GND - 121.35 MHz - TAMPA GROUND  
TWR - 119.05 MHz - TAMPA TOWER  
DEP - 118.15 MHz - TAMPA DEPARTURE  
DEP - 119.65 MHz - TAMPA DEPARTURE  
DEP - 118.80 MHz - TAMPA DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01L	151 ft	11,011 ft	1.72	CONCRETE	0 ft	417 ft
	46 m	3,356 m	7.91		0 m	127 m
19R	151 ft	11,011 ft	181.72	CONCRETE	0 ft	417 ft
	46 m	3,356 m	187.91		0 m	127 m
01R	151 ft	8,308 ft	1.72	CONCRETE	0 ft	410 ft
	46 m	2,532 m	7.91		0 m	125 m
19L	151 ft	8,308 ft	181.72	CONCRETE	0 ft	410 ft
	46 m	2,532 m	187.91		0 m	125 m
10	151 ft	7,005 ft	91.74	ASPHALT	505 ft	187 ft
	46 m	2,135 m	97.93		154 m	57 m
28	151 ft	7,005 ft	271.75	ASPHALT	0 ft	141 ft
	46 m	2,135 m	277.94		0 m	43 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19R	DME	IJRT	108.50 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
01L	LOC-ILS	IAMP	108.90 MHz	18 nm	1.72	-	22 ft
				33 km	7.91		22 m
19L	LOC-ILS	ITPA	110.30 MHz	18 nm	181.72	-	26 ft
				33 km	187.91		26 m
19R	LOC-ILS	IJRT	108.50 MHz	18 nm	181.72	-	26 ft
				33 km	187.91		26 m
01R	LOC-LOC	ITWJ	111.95 MHz	18 nm	1.72	-	26 ft
				33 km	7.91		26 m
01L	GS	IAMP	108.90 MHz	10 nm	1.72	3.00	26 ft
				19 km	7.91		26 m
19L	GS	ITPA	110.30 MHz	10 nm	181.72	3.00	26 ft
				19 km	187.91		26 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19R	GS	IJRT	108.50 MHz	10 nm	181.72	3.00	26 ft
				19 km	187.91		26 m

## KMIA

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 11 ft / 3 m  
Location: 25.796200 -80.289700  
Magnetic Var: 7.272 W

## METAR

KMIA 060153Z 10009KT 10SM SCT028 26/20 A3006 RMK A02 SLP179 T02560200 \$

## TAF

TAF KMIA 052320Z 0600/0706 11011G20KT P6SM SCT025 FM060300 09008KT P6SM FEW030 SCT250 FM061200 11011KT P6SM FEW02

## Frequencies

REC - 119.15 MHz - D-ATIS	REC - 133.67 MHz - D-ATIS
COM - 123.00 MHz - UNICOM	CLD - 135.35 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - MIAMI GROUND	GND - 127.50 MHz - MIAMI GROUND
TWR - 118.30 MHz - MIAMI TOWER	TWR - 123.90 MHz - MIAMI TOWER
APP - 120.50 MHz - MIAMI APPROACH	APP - 124.85 MHz - MIAMI APPROACH
APP - 125.75 MHz - MIAMI APPROACH	DEP - 119.45 MHz - MIAMI DEPARTURE
DEP - 125.50 MHz - MIAMI DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	151 ft	13,027 ft	87.37	CONCRETE	1,371 ft	384 ft
	46 m	3,971 m	94.64		418 m	117 m
27	151 ft	13,027 ft	267.39	CONCRETE	276 ft	374 ft
	46 m	3,971 m	274.66		84 m	114 m
08R	200 ft	10,515 ft	87.38	CONCRETE	0 ft	407 ft
	61 m	3,205 m	94.65		0 m	124 m
26L	200 ft	10,515 ft	267.39	CONCRETE	0 ft	407 ft
	61 m	3,205 m	274.66		0 m	124 m
08L	151 ft	8,607 ft	87.38	CONCRETE	0 ft	387 ft
	46 m	2,624 m	94.65		0 m	118 m
26R	151 ft	8,607 ft	267.39	CONCRETE	0 ft	387 ft
	46 m	2,624 m	274.66		0 m	118 m
12	151 ft	9,366 ft	119.61	CONCRETE	0 ft	397 ft
	46 m	2,855 m	126.88		0 m	121 m
30	151 ft	9,366 ft	299.62	CONCRETE	948 ft	0 ft
	46 m	2,855 m	306.89		289 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IROY	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	DME	IMFA	110.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
12	DME	IGEM	108.90 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
26L	DME	IVIN	109.10 MHz	18 nm	-	-	12 ft
				33 km	-		12 m
26R	DME	ICNV	109.30 MHz	18 nm	-	-	8 ft
				33 km	-		8 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
30	DME	IDCX	111.70 MHz	18 nm	-	-	8 ft
				33 km	-		8 m
08R	LOC-ILS	IMFA	110.30 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
09	LOC-ILS	IBUL	110.90 MHz	18 nm	87.37	-	4 ft
				33 km	94.64		4 m
12	LOC-ILS	IGEM	108.90 MHz	18 nm	119.60	-	4 ft
				33 km	126.87		4 m
26L	LOC-ILS	IVIN	109.10 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
27	LOC-ILS	IMIA	109.50 MHz	18 nm	267.37	-	4 ft
				33 km	274.64		4 m
30	LOC-ILS	IDCX	111.70 MHz	18 nm	299.60	-	4 ft
				33 km	306.87		4 m
08L	LOC-LOC	IROY	109.30 MHz	18 nm	87.36	-	4 ft
				33 km	94.63		4 m
26R	LOC-LOC	ICNV	109.30 MHz	18 nm	267.36	-	4 ft
				33 km	274.63		4 m
08R	GS	IMFA	110.30 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
09	GS	IBUL	110.90 MHz	10 nm	87.37	3.00	4 ft
				19 km	94.64		4 m
12	GS	IGEM	108.90 MHz	10 nm	119.60	3.00	4 ft
				19 km	126.87		4 m
26L	GS	IVIN	109.10 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
27	GS	IMIA	109.50 MHz	10 nm	267.37	3.00	4 ft
				19 km	274.64		4 m
30	GS	IDCX	111.70 MHz	10 nm	299.60	3.00	4 ft
				19 km	306.87		4 m