

KSJC

Norman Y. Mineta San Jose Intl


PHNL

Honolulu Intl

2024/05/01 2223Z

KSJC HADLY BEBOP R464 SOMOH PHNL

2107.91 nm / 3903.85 km

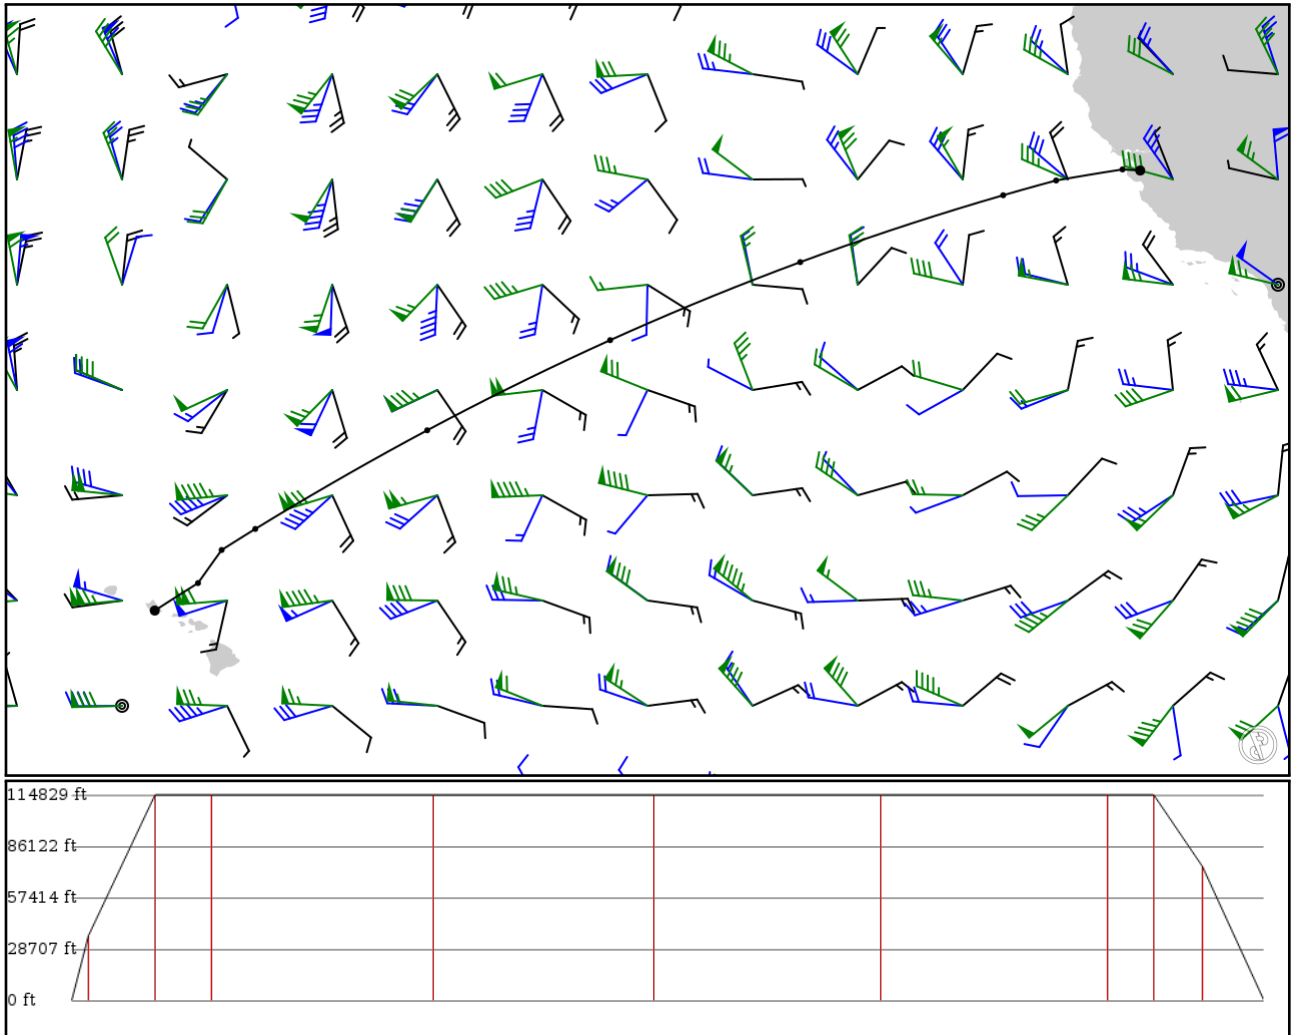

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSJC APT	- -	37.36300 -121.92900	0 ft 0 m	-	Norman Y. Mineta San Jose Intl
HADLY FIX	- -	37.40240 -122.57600	11,000 ft 3,353 m	30 -	
BEBOP FIX	- -	36.99990 -125.00100	35,000 ft 10,668 m	118 -	
BAART FIX	R464 AWY-HI	36.46190 -126.93300	35,000 ft 10,668 m	98 -	
BARAZ FIX	R464 AWY-HI	34.02310 -134.34600	35,000 ft 10,668 m	391 -	
BILLO FIX	R464 AWY-HI	31.17830 -141.29000	35,000 ft 10,668 m	390 -	
BEKME FIX	R464 AWY-HI	27.89220 -147.97000	35,000 ft 10,668 m	400 -	
BOARD FIX	R464 AWY-HI	24.29580 -154.25000	35,000 ft 10,668 m	401 -	
BITTA FIX	R464 AWY-HI	23.52800 -155.47900	35,000 ft 10,668 m	81 -	
SOMOH FIX	R464 AWY-HI	22.32150 -156.34200	22,800 ft 6,949 m	86 -	
PHNL APT	- -	21.31940 -157.92100	0 ft 0 m	106	Honolulu Intl

KSJC

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 2

Elevation: 62 ft / 19 m
Location: 37.363000 -121.929000
Magnetic Var: 12.726 E

METAR

KSJC 012153Z 31009G16KT 10SM CLR 25/03 A2995 RMK A02 SLP141 T02500028

TAF

KSJC 011730Z 0118/0218 33015KT P6SM SKC FM020500 31004KT P6SM SKC FM021700 32010KT P6SM FEW250

Frequencies

REC - 126.95 MHz - ATIS	COM - 124.00 MHz - CTAF
CLD - 118.00 MHz - CLEARANCE DELIVERY	GND - 121.70 MHz - GROUND
TWR - 124.00 MHz - TOWER	APP - 120.10 MHz - NORCAL APPROACH
APP - 125.35 MHz - NORCAL APPROACH	APP - 134.50 MHz - NORCAL DEPARTURE
DEP - 121.30 MHz - NORCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
12R	151 ft	11,012 ft	138.93	CONCRETE	1,299 ft	217 ft
	46 m	3,356 m	126.20		396 m	66 m
30L	151 ft	11,012 ft	318.94	CONCRETE	2,539 ft	49 ft
	46 m	3,356 m	306.21		774 m	15 m
12L	151 ft	11,012 ft	138.93	CONCRETE	1,309 ft	144 ft
	46 m	3,356 m	126.20		399 m	44 m
30R	151 ft	11,012 ft	318.94	CONCRETE	2,539 ft	141 ft
	46 m	3,356 m	306.22		774 m	43 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
12R	DME	ISLV	110.90 MHz	18 nm	-	-	75 ft
				33 km	-		75 m
30L	DME	ISJC	110.90 MHz	18 nm	-	-	49 ft
				33 km	-		49 m
12R	LOC-ILS	ISLV	110.90 MHz	18 nm	138.94	-	62 ft
				33 km	126.21		62 m
30L	LOC-ILS	ISJC	110.90 MHz	18 nm	318.94	-	62 ft
				33 km	306.21		62 m
12R	GS	ISLV	110.90 MHz	10 nm	138.94	3.00	62 ft
				19 km	126.21		62 m
30L	GS	ISJC	110.90 MHz	10 nm	318.94	3.00	62 ft
				19 km	306.21		62 m

PHNL

Region: USA (HAWAII)
Timezone: PACIFIC/HONOLULU
Runways: 4

Elevation: 13 ft / 4 m
Location: 21.319400 -157.921000
Magnetic Var: 9.260 E

METAR

PHNL 012153Z 06014G20KT 10SM FEW025 SCT038 SCT050 29/18 A3002

TAF

PHNL 012121Z 0121/0224 08011G19KT P6SM FEW030 SCT060 FM020500 05008KT P6SM FEW025 SCT060 FM022000 06014G22KT P6SM

Frequencies

REC - 127.90 MHz - ATIS	TWR - 118.10 MHz - HONOLULU TOWER
TWR - 123.90 MHz - HONOLULU TOWER	GND - 121.90 MHz - HONOLULU GROUND
CLD - 121.40 MHz - CLEARANCE DELIVERY	APP - 118.30 MHz - HCF APPROACH
DEP - 124.80 MHz - HCF DEPARTURE	DEP - 124.80 MHz - HCF DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	6,961 ft	52.84	ASPHALT	0 ft	0 ft
	46 m	2,122 m	43.58		0 m	0 m
22R	150 ft	6,961 ft	232.85	ASPHALT	0 ft	0 ft
	46 m	2,122 m	223.59		0 m	0 m
04R	150 ft	9,010 ft	52.85	ASPHALT	0 ft	194 ft
	46 m	2,746 m	43.59		0 m	59 m
22L	150 ft	9,010 ft	232.86	ASPHALT	0 ft	197 ft
	46 m	2,746 m	223.60		0 m	60 m
08R	200 ft	11,987 ft	90.01	ASPHALT	0 ft	558 ft
	61 m	3,654 m	80.75		0 m	170 m
26L	200 ft	11,987 ft	270.02	ASPHALT	0 ft	554 ft
	61 m	3,654 m	260.76		0 m	169 m
08L	150 ft	12,297 ft	90.00	ASPHALT	0 ft	469 ft
	46 m	3,748 m	80.74		0 m	143 m
26R	150 ft	12,297 ft	270.01	ASPHALT	0 ft	696 ft
	46 m	3,748 m	260.75		0 m	212 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04R	DME	IIUM	110.50 MHz	18 nm	-	-	21 ft
				33 km	-		21 m
26L	DME	IEPC	109.10 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
26L	LOC-LOC	IEPC	109.10 MHz	18 nm	304.00	-	13 ft
				33 km	294.74		13 m
04R	GS	IIUM	110.50 MHz	10 nm	52.85	3.00	13 ft
				19 km	43.59		13 m
08L	GS	IHNL	111.70 MHz	10 nm	90.01	3.01	13 ft
				19 km	80.75		13 m