

OEJN

Jeddah King Abdulaziz Intl


OLRA

RAYAK

2024/05/06 1640Z

OEJN RBG **B412** HLF **B544** ASH **G662** GRY KAMEL OLRA

779.21 nm / 1443.10 km

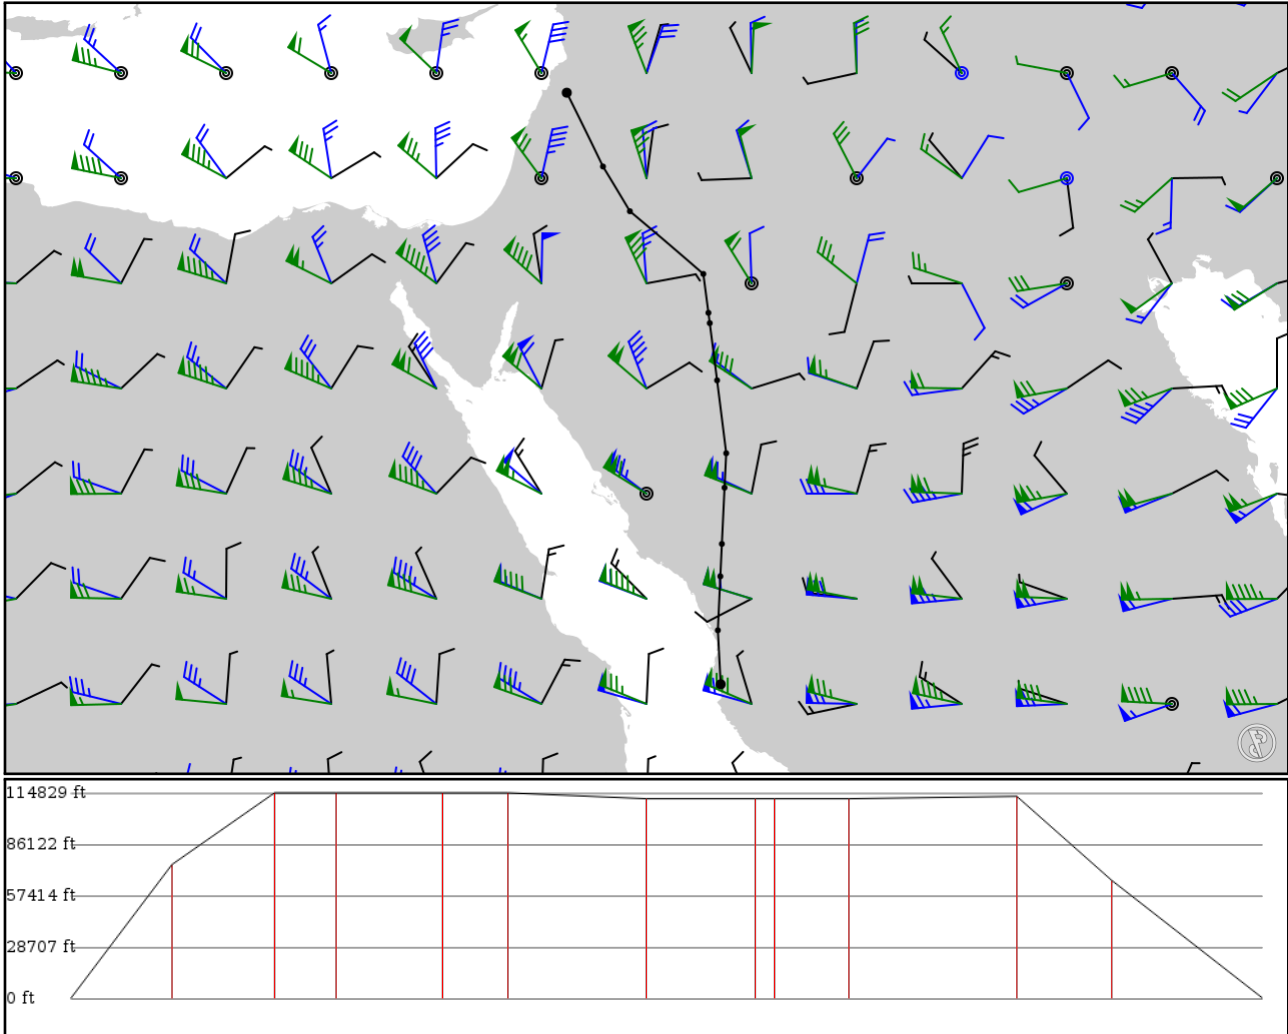

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OEJN APT	-	21.68132 39.15565	0 ft 0 m	-	Jeddah King Abdulaziz Intl
RBG VOR	-	22.79194 39.09722	22,800 ft 6,949 m	66	RABIGH VOR-DME
METEB FIX	B412 AWY-HI	23.90111 39.14861	35,000 ft 10,668 m	66	-
RADNI FIX	B412 AWY-HI	24.56917 39.17972	35,000 ft 10,668 m	40	-
PATOL FIX	B412 AWY-HI	25.72611 39.23472	35,000 ft 10,668 m	69	-
HLF VOR	B412 AWY-HI	26.43417 39.26917	35,000 ft 10,668 m	42	HALAIFA VOR-DME
SOBAS FIX	B544 AWY-HI	27.93333 39.08139	34,000 ft 10,363 m	90	-
ENABI FIX	B544 AWY-HI	29.11083 38.93056	34,000 ft 10,363 m	71	-
LABAD FIX	B544 AWY-HI	29.32306 38.90306	34,000 ft 10,363 m	12	-
ASH VOR	B544 AWY-HI	30.12278 38.79806	34,000 ft 10,363 m	48	AL-SHIGAR VOR-DME
GRY VOR	G662 AWY-HI	31.41264 37.28656	34,400 ft 10,485 m	109	GURIAT VORTAC
KAMEL FIX	- -	32.33226 36.73310	20,100 ft 6,126 m	62	-
OLRA APT	- -	33.85077 35.98774	0 ft 0 m	98	RAYAK

OEJN

Region: SAUDI ARABIA
Timezone: ASIA/RIYADH
Runways: 3

Elevation: 49 ft / 15 m
Location: 21.682800 39.155100
Magnetic Var: 3.895 E

METAR

OEJN 061600Z 34009KT CAVOK 33/07 Q1008 NOSIG

TAF

TAF OEJN 061100Z 0612/0718 34012KT CAVOK BECMG 0618/0620 02005KT BECMG 0706/0708 36015KT

Frequencies

TWR - 118.20 MHz - JEDDAH TOWER
GND - 121.90 MHz - JEDDAH GROUND
REC - 126.20 MHz - JEDDAH ATIS
APP - 119.10 MHz - JEDDAH APPROACH
APP - 123.80 MHz - JEDDAH DIRECTOR

TWR - 124.30 MHz - JEDDAH TOWER
GND - 121.60 MHz - JEDDAH GROUND
DEP - 124.00 MHz - JEDDAH DEPARTURE
APP - 124.00 MHz - JEDDAH APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	197 ft	13,170 ft	159.89	ASPHALT	0 ft	397 ft
	60 m	4,014 m	156.00		0 m	121 m
34R	197 ft	13,170 ft	339.89	ASPHALT	0 ft	397 ft
	60 m	4,014 m	336.00		0 m	121 m
16C	197 ft	13,168 ft	159.88	ASPHALT	0 ft	400 ft
	60 m	4,014 m	155.98		0 m	122 m
34C	197 ft	13,168 ft	339.88	ASPHALT	0 ft	400 ft
	60 m	4,014 m	335.99		0 m	122 m
16R	194 ft	12,511 ft	159.87	ASPHALT	0 ft	394 ft
	59 m	3,813 m	155.97		0 m	120 m
34L	194 ft	12,511 ft	339.87	ASPHALT	0 ft	390 ft
	59 m	3,813 m	335.98		0 m	119 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	IJDC	109.70 MHz	18 nm	-	-	20 ft
				33 km	-		20 m
16L	DME	IDFJ	108.50 MHz	18 nm	-	-	27 ft
				33 km	-		27 m
16R	DME	IJDD	109.30 MHz	18 nm	-	-	9 ft
				33 km	-		9 m
34C	DME	IJDW	109.50 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
34L	DME	IJDL	109.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
34R	DME	IEAL	108.30 MHz	18 nm	-	-	41 ft
				33 km	-		41 m
16C	LOC-ILS	IJDC	109.70 MHz	18 nm	159.88	-	49 ft
				33 km	155.99		49 m
16L	LOC-ILS	IDFJ	108.50 MHz	18 nm	159.89	-	49 ft
				33 km	156.00		49 m
16R	LOC-ILS	IJDD	109.30 MHz	18 nm	159.87	-	49 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	155.98		49 m
34C	LOC-ILS	IJDW	109.50 MHz	18 nm	339.88	-	49 ft
				33 km	335.99		49 m
34L	LOC-ILS	IJDL	109.10 MHz	18 nm	339.87	-	49 ft
				33 km	335.98		49 m
34R	LOC-ILS	IEAL	108.30 MHz	18 nm	339.89	-	49 ft
				33 km	336.00		49 m
16C	GS	IJDC	109.70 MHz	10 nm	159.88	3.00	49 ft
				19 km	155.99		49 m
16L	GS	IDFJ	108.50 MHz	10 nm	159.89	3.00	49 ft
				19 km	156.00		49 m
16R	GS	IJDD	109.30 MHz	10 nm	159.87	3.00	49 ft
				19 km	155.98		49 m
34C	GS	IJDW	109.50 MHz	10 nm	339.88	3.00	49 ft
				19 km	335.99		49 m
34L	GS	IJDL	109.10 MHz	10 nm	339.87	3.00	49 ft
				19 km	335.98		49 m
34R	GS	IEAL	108.30 MHz	10 nm	339.89	3.00	49 ft
				19 km	336.00		49 m