

WIII

Jakarta Soekarno-Hatta Intl


VHHH

Hong Kong Intl

2024/05/15 0715Z

WIII ABASA **L644** TPN **W14** PNK **N875** BOBOB LUSMO **L625** ARESI ATBUD **M772** DULOP **M771** DUMOL **J103** ISBAN
VHHH

1947.80 nm / 3607.33 km

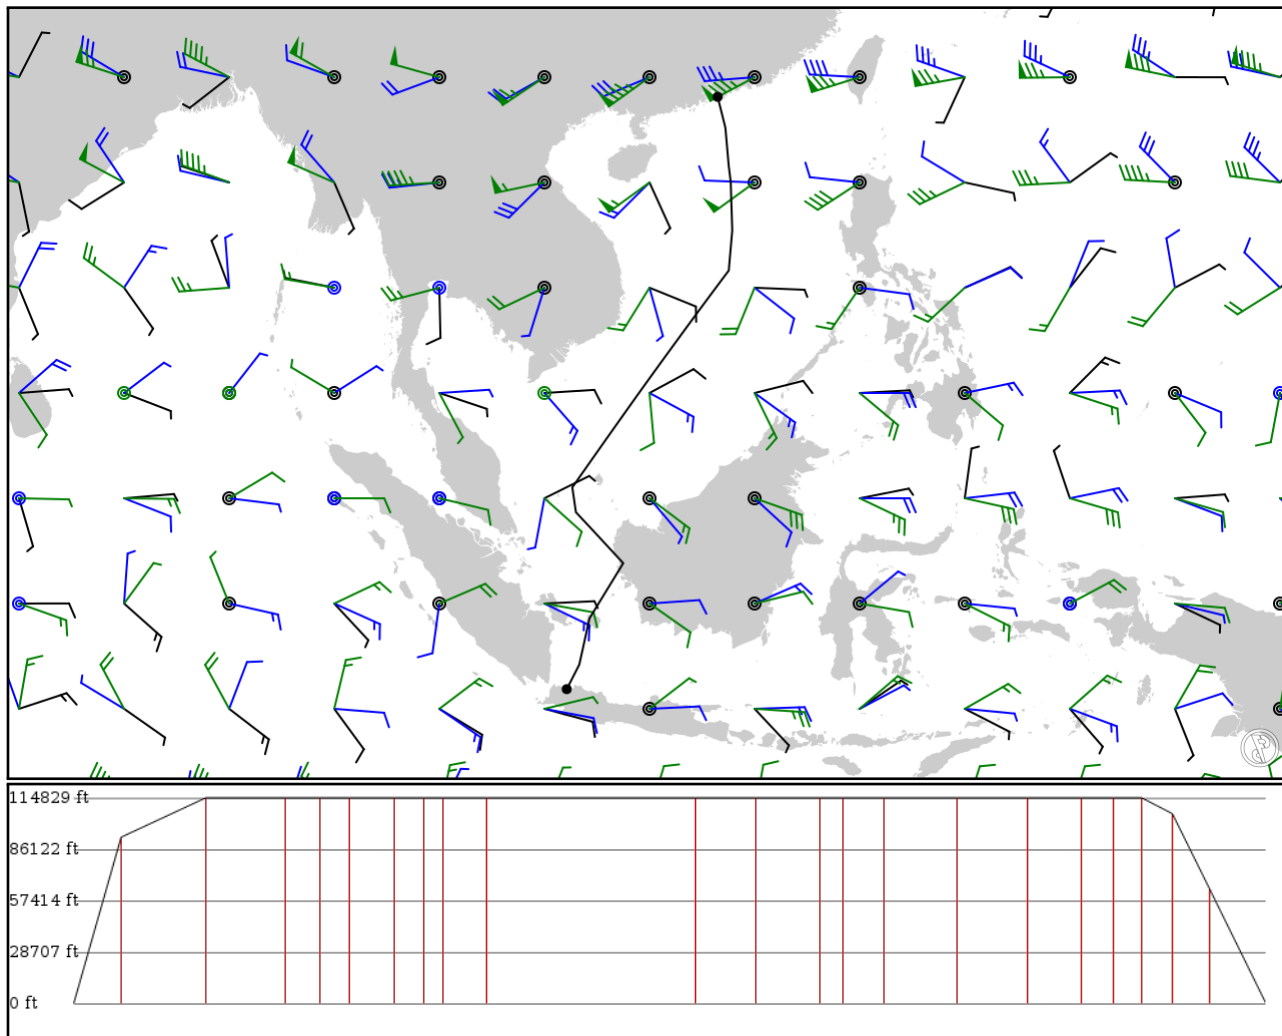

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes

- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
WIII APT	-	-6.12569 106.65700	0 ft 0 m	-	Jakarta Soekarno-Hatta Intl
ABASA FIX	-	-4.94775 107.26100	28,300 ft 8,626 m	79	-
TPN VOR	L644 AWY-LO	-2.72459 107.75300	35,000 ft 10,668 m	136	TANJUNG PANDAN
WIDIA FIX	W14 AWY-HI	-0.87526 108.88700	35,000 ft 10,668 m	130	-
PNK VOR	W14 AWY-HI	-0.07915 109.37500	35,000 ft 10,668 m	56	PONTIANAK
ARUPA FIX	N875 AWY-HI	0.52778 108.81300	35,000 ft 10,668 m	49	-
NIMIX FIX	N875 AWY-HI	1.41444 107.99100	35,000 ft 10,668 m	72	-
ESPIT FIX	N875 AWY-HI	2.00306 107.44000	35,000 ft 10,668 m	48	-
BOBOB FIX	N875 AWY-HI	2.36833 107.09900	35,000 ft 10,668 m	30	-
LUSMO FIX	-	3.56139 106.92600	35,000 ft 10,668 m	72	-
AKMON FIX	L625 AWY-HI	8.21556 110.21900	35,000 ft 10,668 m	341	-
UDOSI FIX	L625 AWY-HI	9.54694 111.18100	35,000 ft 10,668 m	98	-
ALDAS FIX	L625 AWY-HI	10.94830 112.20500	35,000 ft 10,668 m	103	-
AGSAM FIX	L625 AWY-HI	11.47170 112.58800	35,000 ft 10,668 m	38	-
ANOKI FIX	L625 AWY-HI	12.36670 113.25000	35,000 ft 10,668 m	66	-
ARESI FIX	L625 AWY-HI	13.97330 114.45000	35,000 ft 10,668 m	119	-
ATBUD FIX	-	15.90050 114.61800	35,000 ft 10,668 m	116	-
ASOBA FIX	M772 AWY-HI	17.37280 114.57000	35,000 ft 10,668 m	88	-
DULOP FIX	M772 AWY-HI	18.23670 114.54300	35,000 ft 10,668 m	51	-
DUMOL FIX	M771 AWY-HI	19.00000 114.44700	35,000 ft 10,668 m	46	-
ARROW FIX	J103 AWY-HI	19.83590 114.37400	32,300 ft 9,845 m	50	-
ISBAN FIX	J103 AWY-HI	20.82620 114.28700	19,500 ft 5,944 m	59	-
VHHH APT	-	22.30890 113.91500	0 ft 0 m	91	Hong Kong Intl

WIII

Region: INDONESIA
Timezone: ASIA/JAKARTA
Runways: 3

Elevation: 34 ft / 10 m
Location: -6.119810 106.657000
Magnetic Var: 0.529 E

METAR

WIII 150700Z 04012KT 9999 FEW020 34/25 Q1008 NOSIG

TAF

TAF WIII 150500Z 1506/1612 07012KT 9000 SCT020 BECMG 1512/1514 19005KT 5000 HZ BECMG 1600/1602 VRB02KT 8000 NSW

Frequencies

REC - 126.85 MHz - ATIS	CLD - 121.95 MHz -
CLD - 124.25 MHz -	SOEKARNO-HATTA CLEARANCE DELIVERY
SOEKARNO-HATTA CLEARANCE DELIVERY	CLD - 125.15 MHz -
GND - 121.60 MHz - SOEKARNO-HATTA GROUND	SOEKARNO-HATTA CLEARANCE DELIVERY
GND - 128.85 MHz - SOEKARNO-HATTA GROUND	GND - 121.00 MHz - SOEKARNO-HATTA GROUND
TWR - 118.20 MHz - SOEKARNO-HATTA TOWER	GND - 128.95 MHz - SOEKARNO-HATTA GROUND
TWR - 119.30 MHz - SOEKARNO-HATTA TOWER	TWR - 118.75 MHz - SOEKARNO-HATTA TOWER
APP - 124.20 MHz - JAKARTA ARRIVAL	TWR - 120.25 MHz - SOEKARNO-HATTA TOWER
APP - 119.75 MHz - JAKARTA DIRECTOR	APP - 125.45 MHz - JAKARTA ARRIVAL
APP - 124.55 MHz - JAKARTA DIRECTOR	APP - 123.75 MHz - JAKARTA DIRECTOR
APP - 125.05 MHz - JAKARTA DIRECTOR	APP - 124.95 MHz - JAKARTA DIRECTOR
APP - 124.15 MHz - JAKARTA RADAR	APP - 127.90 MHz - JAKARTA DIRECTOR
APP - 125.35 MHz - JAKARTA RADAR	APP - 124.35 MHz - JAKARTA RADAR
APP - 127.95 MHz - JAKARTA RADAR	APP - 126.45 MHz - JAKARTA RADAR
	APP - 130.10 MHz - JAKARTA RADAR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	8,202 ft	68.13	ASPHALT	328 ft	846 ft
	46 m	2,500 m	67.61		100 m	258 m
24	150 ft	8,202 ft	248.13	ASPHALT	0 ft	0 ft
	46 m	2,500 m	247.60		0 m	0 m
07L	197 ft	11,820 ft	68.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	67.62		0 m	0 m
25R	197 ft	11,820 ft	248.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	247.62		0 m	0 m
07R	197 ft	12,015 ft	68.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	67.59		0 m	0 m
25L	197 ft	12,015 ft	248.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	247.59		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	ICHL	111.50 MHz	18 nm	68.13	-	21 ft
				33 km	67.60		21 m
07R	LOC-ILS	ICHR	110.50 MHz	18 nm	68.13	-	27 ft
				33 km	67.60		27 m
25L	LOC-ILS	ICGL	111.10 MHz	18 nm	248.12	-	34 ft
				33 km	247.59		34 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	LOC-ILS	ICGR	110.90 MHz	18 nm	248.13	-	29 ft
				33 km	247.60		29 m
07L	GS	ICHL	111.50 MHz	10 nm	68.25	3.00	29 ft
				19 km	67.72		29 m
07R	GS	ICHR	110.50 MHz	10 nm	68.24	3.00	34 ft
				19 km	67.71		34 m
25L	GS	ICGL	111.10 MHz	10 nm	248.24	3.00	27 ft
				19 km	247.71		27 m
25R	GS	ICGR	110.90 MHz	10 nm	248.25	3.00	21 ft
				19 km	247.72		21 m

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.238 W

METAR

VHHH 150700Z 27009KT CAVOK 29/17 Q1013 NOSIG

TAF

TAF VHHH 150500Z 1506/1612 27010KT 9999 FEW040 TX30/1506Z TX30/1606Z TN24/1522Z BECMG 1509/1511 09010KT TEMPO 160

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.03		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.03		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m