


2024/05/15 0351Z

CYZH CETTY **J29** PLB **J595** BEJAT CYYZ

700.78 nm / 1297.84 km

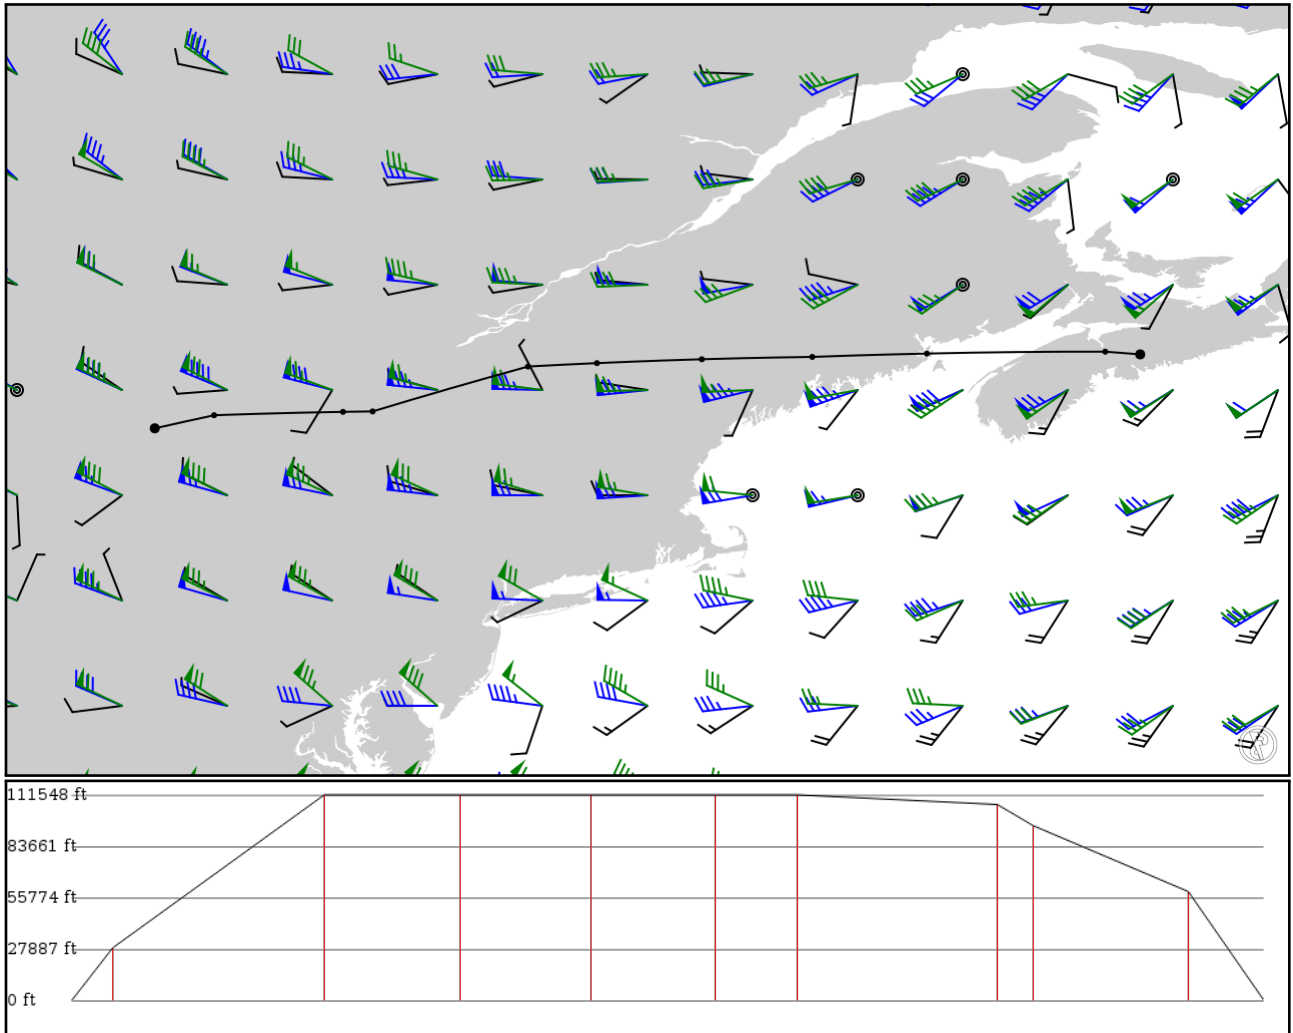

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 29000ft
- Cruise Speed: 420kts
- Descent Rate: 2000ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
CYHZ APT	- -	44.88316 -63.51055	0 ft 0 m	-	HALIFAX INTL
CETTY FIX	- -	44.92722 -64.08219	8,700 ft 2,652 m	24	-
BGR80 FIX	J29 AWY-HI	44.89625 -66.99940	34,000 ft 10,363 m	124	-
BGR VOR	J29 AWY-HI	44.84181 -68.87397	34,000 ft 10,363 m	79	BANGOR VORTAC
RANGY FIX	J29 AWY-HI	44.80340 -70.68110	34,000 ft 10,363 m	77	-
COVAN FIX	J29 AWY-HI	44.74047 -72.39543	34,000 ft 10,363 m	73	-
PLB VOR	J29 AWY-HI	44.68494 -73.52269	34,000 ft 10,363 m	48	PLATTSBURGH VORTAC
ART VOR	J595 AWY-HI	43.95214 -76.06461	32,400 ft 9,876 m	117	WATERTOWN VORTAC
ART21 FIX	J595 AWY-HI	43.94489 -76.54933	28,900 ft 8,809 m	20	-
BEJAT FIX	J595 AWY-HI	43.88985 -78.65740	18,000 ft 5,486 m	91	-
CYYZ APT	- -	43.67613 -79.62767	0 ft 0 m	43	Toronto Lester B Pearson Intl

CYHZ

Region: CANADA
Timezone: AMERICA/HALIFAX
Runways: 2

Elevation: 477 ft / 145 m
Location: 44.882500 -63.510400
Magnetic Var: 16.619 W

METAR

CYHZ 150300Z 31006KT 15SM SKC 12/01 A2999 RMK SLP160

TAF

TAF TAF CYHZ 150240Z 1503/1524 02005KT P6SM SKC BECMG 1504/1506 BKN080 FM150600 VRB03KT P6SM BKN080 BECMG 1508/1510

Frequencies

REC - 121.00 MHz - ATIS
GND - 121.90 MHz - HALIFAX GROUND
APP - 118.70 MHz - HALIFAX APPROACH
APP - 128.55 MHz - HALIFAX APPROACH
CLD - 123.95 MHz - CLEARANCE DELIVERY
TWR - 118.40 MHz - HALIFAX TOWER
APP - 119.20 MHz - HALIFAX APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	200 ft	10,499 ft	34.99	ASPHALT	0 ft	0 ft
	61 m	3,200 m	51.60		0 m	0 m
23	200 ft	10,499 ft	215.00	ASPHALT	364 ft	0 ft
	61 m	3,200 m	231.62		111 m	0 m
14	200 ft	7,692 ft	125.18	ASPHALT	0 ft	0 ft
	61 m	2,344 m	141.80		0 m	0 m
32	200 ft	7,692 ft	305.20	ASPHALT	0 ft	0 ft
	61 m	2,344 m	321.82		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
14	LOC-ILS	IHZ	109.10 MHz	18 nm	125.19	-	477 ft
				33 km	141.81		477 m
23	LOC-ILS	IJG	109.90 MHz	18 nm	215.00	-	477 ft
				33 km	231.62		477 m
05	LOC-LOC	IGX	109.90 MHz	18 nm	35.00	-	477 ft
				33 km	51.62		477 m
14	GS	IHZ	109.10 MHz	10 nm	125.19	3.00	477 ft
				19 km	141.81		477 m
23	GS	IJG	109.90 MHz	10 nm	215.00	3.00	477 ft
				19 km	231.62		477 m

CYYZ

Region: CANADA
Timezone: AMERICA/TORONTO
Runways: 5

Elevation: 564 ft / 172 m
Location: 43.676100 -79.627700
Magnetic Var: 10.261 W

METAR

CYYZ 150300Z 35009KT 15SM FEW140 SCT200 13/08 A2984 RMK AC2CI2 SLP107

TAF

TAF CYYZ 150240Z 1503/1606 36010KT P6SM FEW080 BKN180 FM151500 05010KT P6SM BKN030 BECMG 1516/1518 09010KT BECMG

Frequencies

TWR - 118.35 MHz - TORONTO TOWER	TWR - 118.70 MHz - TORONTO TOWER
GND - 119.10 MHz - TORONTO GROUND	GND - 121.65 MHz - TORONTO GROUND
GND - 121.90 MHz - TORONTO GROUND	REC - 120.82 MHz - ATIS
REC - 133.10 MHz - ATIS	CLD - 121.30 MHz - CLEARANCE DELIVERY
APP - 132.80 MHz - TORONTO APPROACH	APP - 124.47 MHz - TORONTO APPROACH
APP - 125.40 MHz - TORONTO APPROACH	APP - 123.27 MHz - LONDON RADIO
DEP - 127.57 MHz - TORONTO DEPARTURE	DEP - 128.80 MHz - TORONTO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	9,707 ft	46.43	ASPHALT	0 ft	131 ft
	60 m	2,959 m	56.69		0 m	40 m
24R	197 ft	9,707 ft	226.45	ASPHALT	194 ft	98 ft
	60 m	2,959 m	236.71		59 m	30 m
06R	197 ft	9,007 ft	46.43	ASPHALT	0 ft	95 ft
	60 m	2,745 m	56.69		0 m	29 m
24L	197 ft	9,007 ft	226.45	ASPHALT	0 ft	95 ft
	60 m	2,745 m	236.71		0 m	29 m
05	197 ft	11,128 ft	46.39	ASPHALT	141 ft	141 ft
	60 m	3,392 m	56.65		43 m	43 m
23	197 ft	11,128 ft	226.41	ASPHALT	492 ft	141 ft
	60 m	3,392 m	236.67		150 m	43 m
15L	197 ft	11,061 ft	136.64	ASPHALT	0 ft	92 ft
	60 m	3,372 m	146.90		0 m	28 m
33R	197 ft	11,061 ft	316.66	ASPHALT	0 ft	89 ft
	60 m	3,372 m	326.92		0 m	27 m
15R	197 ft	9,097 ft	136.62	ASPHALT	597 ft	0 ft
	60 m	2,773 m	146.88		182 m	0 m
33L	197 ft	9,097 ft	316.64	ASPHALT	591 ft	0 ft
	60 m	2,773 m	326.90		180 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24L	DME	IIDP	111.95 MHz	18 nm	-	-	568 ft
				33 km	-		568 m
24R	DME	INV	109.30 MHz	18 nm	-	-	546 ft
				33 km	-		546 m
05	LOC-ILS	ITX	109.70 MHz	18 nm	46.40	-	564 ft
				33 km	56.66		564 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IJS	109.10 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
06R	LOC-ILS	ICV	111.95 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
15L	LOC-ILS	IRW	110.50 MHz	18 nm 33 km	136.65 146.91	-	564 ft 564 m
15R	LOC-ILS	ILP	110.95 MHz	18 nm 33 km	136.63 146.89	-	564 ft 564 m
23	LOC-ILS	IYZ	111.50 MHz	18 nm 33 km	226.40 236.66	-	564 ft 564 m
24L	LOC-ILS	IDP	111.95 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
24R	LOC-ILS	INV	109.30 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
33L	LOC-ILS	ITO	110.95 MHz	18 nm 33 km	316.63 326.89	-	564 ft 564 m
33R	LOC-ILS	ILE	110.30 MHz	18 nm 33 km	316.65 326.91	-	564 ft 564 m
05	GS	ITX	109.70 MHz	10 nm 19 km	46.40 56.66	3.00	564 ft 564 m
06L	GS	IJS	109.10 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
06R	GS	ICV	111.95 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
15L	GS	IRW	110.50 MHz	10 nm 19 km	136.65 146.91	3.00	564 ft 564 m
15R	GS	ILP	110.95 MHz	10 nm 19 km	136.63 146.89	3.00	564 ft 564 m
23	GS	IYZ	111.50 MHz	10 nm 19 km	226.40 236.66	3.00	564 ft 564 m
24L	GS	IIDP	111.95 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
24R	GS	INV	109.30 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
33L	GS	ITO	110.95 MHz	10 nm 19 km	316.63 326.89	3.00	564 ft 564 m
33R	GS	ILE	110.30 MHz	10 nm 19 km	316.65 326.91	3.00	564 ft 564 m