

# KJFK

John F Kennedy Int'l


# LPPT

Lisbon Portela Int'l

2024/05/11 0331Z

KJFK FLUTE **L456** LINND **N15B** JOBOC W 41/60 Y 43/40 Z 46/15 GONAN ARMED **T12** ASMAR TUNAV LAMDI LPPT

3225.67 nm / 5973.95 km

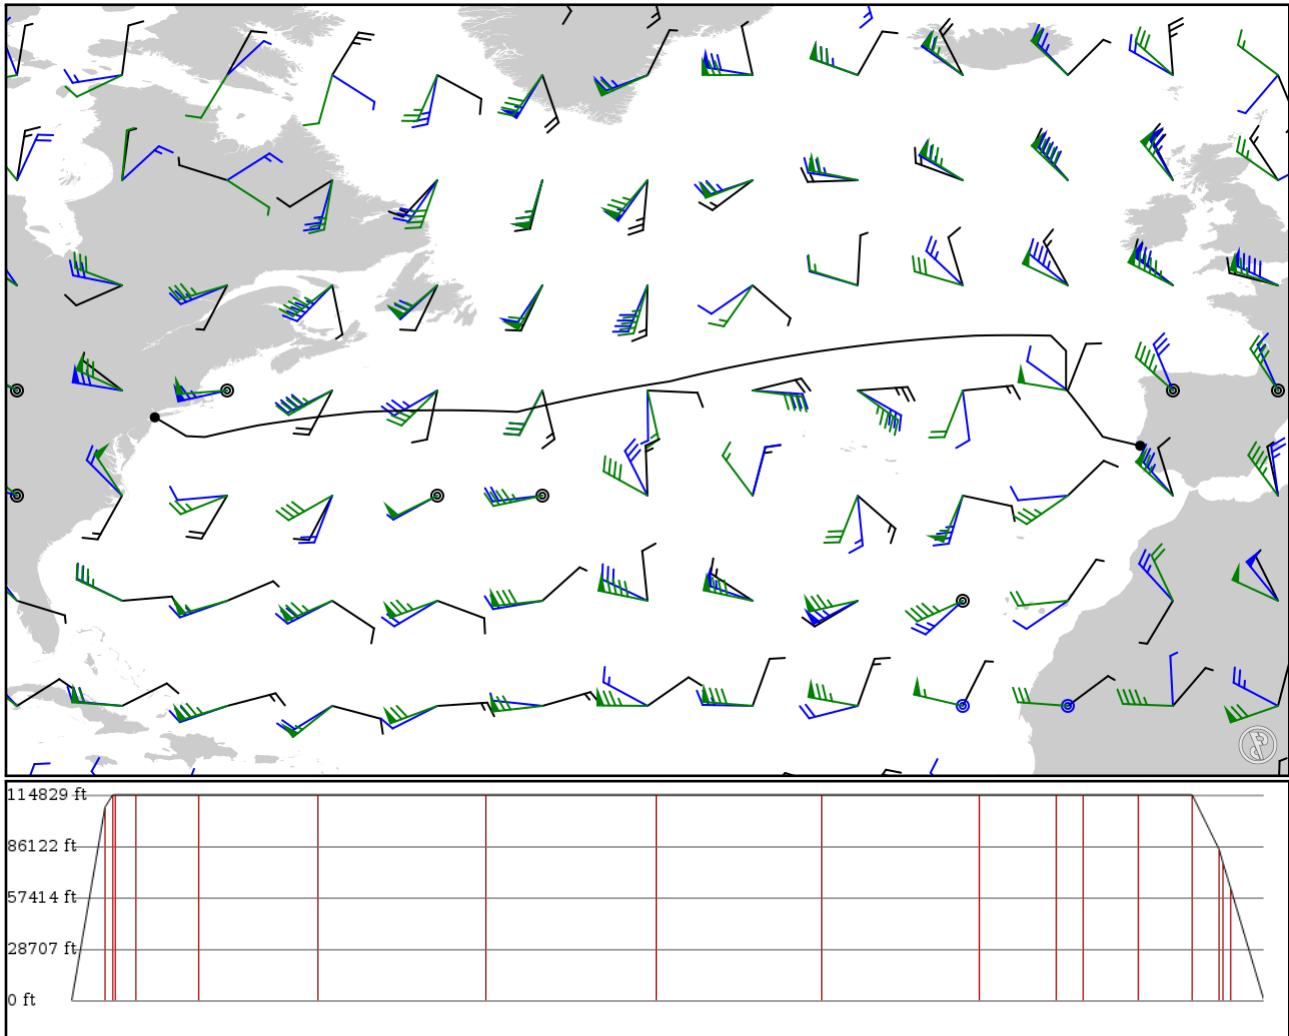

## Notes

Using NAT tracks from 9/12/2018

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes

- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KJFK APT	-	40.63990 -73.77870	0 ft 0 m	-	John F Kennedy Int'l
FLUTE FIX	-	39.70020 -72.18770	32,900 ft 10,028 m	92	-
NAROW FIX	L456 AWY-HI	39.49330 -71.84690	35,000 ft 10,668 m	20	-
LINND FIX	L456 AWY-HI	39.40980 -71.71050	35,000 ft 10,668 m	8	-
KENDA FIX	N15B AWY-HI	39.35300 -70.49950	35,000 ft 10,668 m	56	-
JOBOC FIX	N15B AWY-HI	40.11670 -67.00000	35,000 ft 10,668 m	167	-
41/60 LATLON	W NAT	41.00000 -60.00000	35,000 ft 10,668 m	323	-
41/50 LATLON	Y NAT	41.00000 -50.00000	35,000 ft 10,668 m	453	-
43/40 LATLON	Y NAT	43.00000 -40.00000	35,000 ft 10,668 m	461	-
45/30 LATLON	Z NAT	45.00000 -30.00000	35,000 ft 10,668 m	448	-
46/20 LATLON	Z NAT	46.00000 -20.00000	35,000 ft 10,668 m	424	-
46/15 LATLON	Z NAT	46.00000 -15.00000	35,000 ft 10,668 m	208	-
GONAN FIX	-	45.00000 -14.00000	35,000 ft 10,668 m	73	-
ARMED FIX	-	42.50000 -14.00000	35,000 ft 10,668 m	150	-
SOPOP FIX	T12 AWY-HI	40.44000 -12.38670	35,000 ft 10,668 m	143	-
ASMAR FIX	T12 AWY-HI	39.37250 -11.59560	25,700 ft 7,833 m	73	-
TUNAV FIX	-	39.31500 -11.37360	23,400 ft 7,132 m	10	-
LAMDI FIX	-	39.20580 -10.96500	19,100 ft 5,822 m	20	-
LPPT APT	-	38.77850 -9.13528	0 ft 0 m	89	Lisbon Portela Intl

## KJFK

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 4

Elevation: 12 ft / 4 m  
Location: 40.640100 -73.776500  
Magnetic Var: 12.819 W

## METAR

KJFK 110251Z 01003KT 10SM -RA FEW031 BKN080 OVC250 10/07 A2984 RMK AO2 RAB47 SLP103 P0000 60001 T01000072 58000

## TAF

TAF AMD KJFK 110233Z 1103/1206 04007KT P6SM SCT020 BKN060 FM110600 02008KT P6SM SCT120 FM111300 05010KT P6SM FEW0

## Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.49		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.50		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
31R	DME	IRTH	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm	30.68	-	12 ft
				33 km	43.50		12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm	30.67	-	12 ft
				33 km	43.49		12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm	120.87	-	12 ft
				33 km	133.69		12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm	210.67	-	12 ft
				33 km	223.49		12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm	210.68	-	12 ft
				33 km	223.50		12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm	300.84	-	12 ft
				33 km	313.66		12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm	300.87	-	12 ft
				33 km	313.69		12 m
04L	GS	IHIQ	110.90 MHz	10 nm	30.68	3.00	12 ft
				19 km	43.50		12 m
04R	GS	IJFK	109.50 MHz	10 nm	30.67	3.00	12 ft
				19 km	43.49		12 m
13L	GS	ITLK	111.50 MHz	10 nm	120.87	3.00	12 ft
				19 km	133.69		12 m
22L	GS	IIWY	110.90 MHz	10 nm	210.67	3.00	12 ft
				19 km	223.49		12 m
22R	GS	IJOC	109.50 MHz	10 nm	210.68	3.00	12 ft
				19 km	223.50		12 m
31L	GS	IMOH	111.35 MHz	10 nm	300.84	3.00	12 ft
				19 km	313.66		12 m
31R	GS	IRTH	111.50 MHz	10 nm	300.87	3.00	12 ft
				19 km	313.69		12 m

## LPPT

Region: PORTUGAL  
Timezone: EUROPE/LISBON  
Runways: 2

Elevation: 374 ft / 114 m  
Location: 38.778800 -9.135190  
Magnetic Var: 1.569 W

## METAR

LPPT 110300Z 32007KT 290V020 9999 FEW012 15/13 Q1014

## TAF

TAF LPPT 102300Z 1100/1206 31008KT 9999 FEW012 TEMPO 1100/1108 BKN008 BECMG 1111/1113 32013KT FEW030 BECMG 1122/1

## Frequencies

REC - 121.95 MHz - ATIS	REC - 124.15 MHz - ATIS
TWR - 118.10 MHz - LISBOA TOWER	TWR - 118.50 MHz - LISBOA TOWER
GND - 121.75 MHz - LISBOA GROUND	CLD - 118.95 MHz - CLEARANCE DELIVERY
APP - 119.10 MHz - LISBOA APPROACH	APP - 119.55 MHz - LISBOA APPROACH
APP - 125.35 MHz - LISBOA ARRIVAL	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03	148 ft	12,505 ft	22.65	ASPHALT	302 ft	0 ft
	45 m	3,812 m	24.22		92 m	0 m
21	148 ft	12,505 ft	202.66	ASPHALT	1,965 ft	0 ft
	45 m	3,812 m	204.23		599 m	0 m
17	148 ft	7,612 ft	168.14	ASPHALT	0 ft	0 ft
	45 m	2,320 m	169.71		0 m	0 m
35	148 ft	7,612 ft	348.14	ASPHALT	194 ft	299 ft
	45 m	2,320 m	349.71		59 m	91 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03	DME	ILI	109.10 MHz	18 nm	-	-	419 ft
				33 km	-		419 m
21	DME	ILB	109.50 MHz	18 nm	-	-	423 ft
				33 km	-		423 m
03	LOC-ILS	ILI	109.10 MHz	18 nm	22.66	-	374 ft
				33 km	24.23		374 m
21	LOC-ILS	ILB	109.50 MHz	18 nm	202.59	-	335 ft
				33 km	204.15		335 m
03	GS	ILI	109.10 MHz	10 nm	22.66	3.00	374 ft
				19 km	24.23		374 m
21	GS	ILB	109.50 MHz	10 nm	203.42	3.00	423 ft
				19 km	204.99		423 m