


2024/05/07 0154Z
LEBL TUDRA IWW68 EGLL
620.37 nm / 1148.93 km

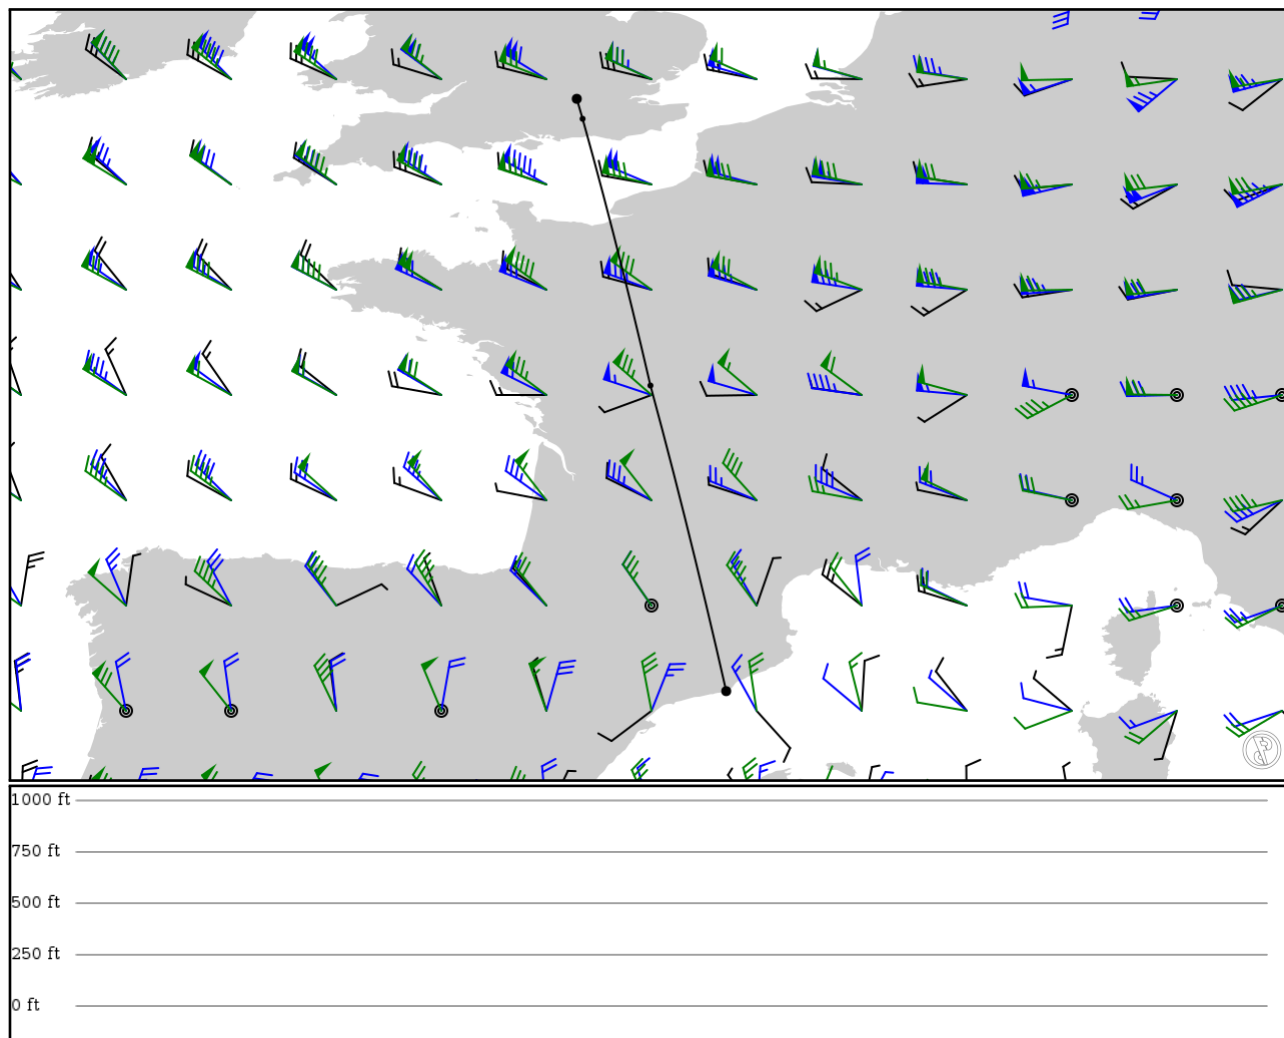

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LEBL	-	41.28777	0 ft	-	-
APT	-	2.08484	0 m		
TUDRA	-	46.53889	0 ft	320	-
FIX	-	0.78083	0 m		
IWW68	-	51.12167	0 ft	279	-
FIX	-	-0.38667	0 m		
EGLL	-	51.46477	0 ft	20	-
APT	-	-0.48695	0 m		

LEBL

Region: SPAIN
Timezone: EUROPE/MADRID
Runways: 3

Elevation: 14 ft / 4 m
Location: 41.295100 2.088030
Magnetic Var: 1.540 E

METAR

LEBL 070130Z 22006KT 9999 FEW025 SCT050 15/12 Q1016 NOSIG

TAF

TAF LEBL 062300Z 0700/0724 25008KT 9999 FEW010 SCT030 TX19/0712Z TN12/0705Z PROB30 TEMPO 0700/0706 BKN010 BECMG 0

Frequencies

REC - 121.97 MHz - ATIS	REC - 118.65 MHz - ATIS
TWR - 118.32 MHz - BARCELONA TOWER	TWR - 118.10 MHz - BARCELONA TOWER
TWR - 122.82 MHz - BARCELONA TOWER	TWR - 122.10 MHz - BARCELONA TOWER
GND - 122.22 MHz - BARCELONA GROUND	GND - 121.70 MHz - BARCELONA GROUND
GND - 121.65 MHz - BARCELONA GROUND	CLD - 121.80 MHz - CLEARANCE DELIVERY
APP - 121.15 MHz - BARCELONA APPROACH	APP - 119.10 MHz - BARCELONA APPROACH
APP - 135.27 MHz - BARCELONA APPROACH	APP - 133.97 MHz - BARCELONA APPROACH
APP - 131.12 MHz - BARCELONA APPROACH	APP - 127.70 MHz - BARCELONA APPROACH
APP - 126.50 MHz - BARCELONA APPROACH	APP - 124.70 MHz - BARCELONA APPROACH
APP - 125.25 MHz - BARCELONA APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
02	148 ft	8,307 ft	18.91	ASPHALT	0 ft	0 ft
	45 m	2,532 m	17.37		0 m	0 m
20	148 ft	8,307 ft	198.92	ASPHALT	0 ft	226 ft
	45 m	2,532 m	197.38		0 m	69 m
07R	197 ft	8,722 ft	65.48	ASPHALT	0 ft	0 ft
	60 m	2,658 m	63.94		0 m	0 m
25L	197 ft	8,722 ft	245.50	ASPHALT	0 ft	0 ft
	60 m	2,658 m	243.96		0 m	0 m
07L	197 ft	10,984 ft	65.48	ASPHALT	1,401 ft	0 ft
	60 m	3,348 m	63.94		427 m	0 m
25R	197 ft	10,984 ft	245.50	ASPHALT	0 ft	0 ft
	60 m	3,348 m	243.96		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
02	DME	BLT	108.75 MHz	25 nm	-	-	12 ft
				46 km	-		12 m
07L	DME	QAA	110.30 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
07R	DME	BLE	110.75 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
25L	DME	BLW	111.50 MHz	18 nm	-	-	14 ft
				33 km	-		14 m
25R	DME	BCA	109.50 MHz	18 nm	-	-	30 ft
				33 km	-		30 m
02	LOC-ILS	BLT	108.75 MHz	18 nm	18.92	-	14 ft
				33 km	17.38		14 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	QAA	110.30 MHz	18 nm	65.50	-	14 ft
				33 km	63.96		14 m
07R	LOC-ILS	BLE	110.75 MHz	18 nm	65.50	-	14 ft
				33 km	63.96		14 m
25L	LOC-ILS	BLW	111.50 MHz	18 nm	245.50	-	14 ft
				33 km	243.96		14 m
25R	LOC-ILS	BCA	109.50 MHz	18 nm	245.50	-	14 ft
				33 km	243.96		14 m
02	GS	BLT	108.75 MHz	10 nm	18.92	3.00	14 ft
				19 km	17.38		14 m
07L	GS	QAA	110.30 MHz	10 nm	65.50	3.00	14 ft
				19 km	63.96		14 m
07R	GS	BLE	110.75 MHz	10 nm	65.50	3.00	14 ft
				19 km	63.96		14 m
25L	GS	BLW	111.50 MHz	10 nm	245.50	3.00	14 ft
				19 km	243.96		14 m
25R	GS	BCA	109.50 MHz	10 nm	245.50	3.00	14 ft
				19 km	243.96		14 m

EGLL

Region: UNITED KINGDOM
Timezone: EUROPE/LONDON
Runways: 2

Elevation: 83 ft / 25 m
Location: 51.471200 -0.460881
Magnetic Var: 0.376 E

METAR

EGLL 070120Z AUTO 01005KT 9999 NCD 12/10 Q1015

TAF

TAF EGLL 062254Z 0700/0806 02004KT 9999 FEW040 PROB30 TEMPO 0700/0702 8000 -RA TEMPO 0702/0707 7000 PROB30 0702/0707 4000

Frequencies

REC - 128.07 MHz - HEATHROW INFORMATION	REC - 121.92 MHz - HEATHROW INFORMATION
CLD - 121.97 MHz - HEATHROW DELIVERY	GND - 121.70 MHz - HEATHROW GROUND
GND - 121.85 MHz - HEATHROW GROUND	GND - 121.90 MHz - HEATHROW GROUND
TWR - 118.50 MHz - HEATHROW TOWER	TWR - 118.70 MHz - HEATHROW TOWER
TWR - 124.47 MHz - HEATHROW TOWER	APP - 119.72 MHz - HEATHROW DIRECTOR
APP - 120.40 MHz - HEATHROW DIRECTOR	APP - 134.97 MHz - HEATHROW DIRECTOR
APP - 125.62 MHz - HEATHROW RADAR	APP - 127.52 MHz - HEATHROW RADAR
DEP - 120.52 MHz - HEATHROW DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	164 ft	12,770 ft	89.66	ASPHALT	1,007 ft	0 ft
	50 m	3,892 m	89.29		307 m	0 m
27R	164 ft	12,770 ft	269.70	ASPHALT	0 ft	177 ft
	50 m	3,892 m	269.33		0 m	54 m
09R	164 ft	11,975 ft	89.68	ASPHALT	1,004 ft	0 ft
	50 m	3,650 m	89.31		306 m	0 m
27L	164 ft	11,975 ft	269.72	ASPHALT	0 ft	95 ft
	50 m	3,650 m	269.35		0 m	29 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IAA	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09R	DME	IBB	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27L	DME	ILL	109.50 MHz	18 nm	-	-	84 ft
				33 km	-		84 m
27R	DME	IRR	110.30 MHz	18 nm	-	-	89 ft
				33 km	-		89 m
09L	LOC-ILS	IAA	110.30 MHz	18 nm	89.68	-	83 ft
				33 km	89.30		83 m
09R	LOC-ILS	IBB	109.50 MHz	18 nm	89.70	-	83 ft
				33 km	89.32		83 m
27L	LOC-ILS	ILL	109.50 MHz	18 nm	269.70	-	83 ft
				33 km	269.32		83 m
27R	LOC-ILS	IRR	110.30 MHz	18 nm	269.68	-	83 ft
				33 km	269.30		83 m
09L	GS	IAA	110.30 MHz	10 nm	89.68	3.00	83 ft
				19 km	89.30		83 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09R	GS	IBB	109.50 MHz	10 nm	89.70	3.00	83 ft
				19 km	89.32		83 m
27L	GS	ILL	109.50 MHz	10 nm	269.70	3.00	83 ft
				19 km	269.32		83 m
27R	GS	IRR	110.30 MHz	10 nm	269.68	3.00	83 ft
				19 km	269.30		83 m