

KABQ

Albuquerque International Sunport


KLAS

Mc Carran Intl

2024/05/13 2104Z

KABQ LORAT J72 PGS KLAS

425.48 nm / 787.98 km

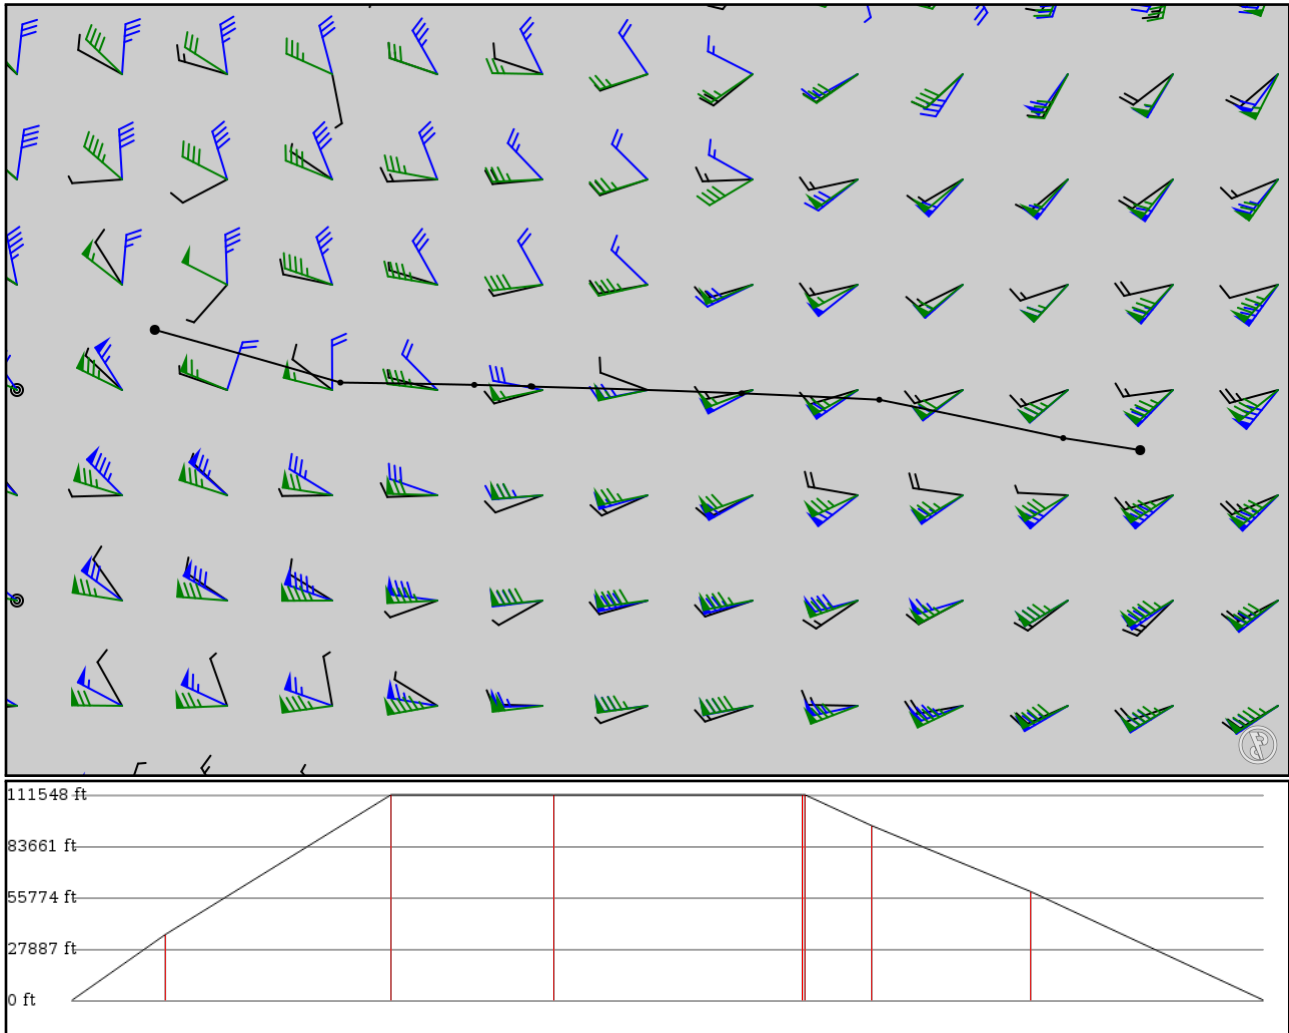

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 260kts
- Cruise Altitude: 33000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KABQ APT	-	35.03965 -106.61058	0 ft 0 m	-		Albuquerque International Sunport
LORAT FIX	-	35.14429 -107.27814	10,900 ft 3,322 m	33	-	
GUP VOR	J72 AWY-HI	35.47600 -108.87261	34,000 ft 10,363 m	80		GALLUP VORTAC
DILCO FIX	J72 AWY-HI	35.53123 -110.06537	34,000 ft 10,363 m	58	-	
BAVPE FIX	J72 AWY-HI	35.58950 -111.88044	34,000 ft 10,363 m	88	-	
MOSBI FIX	J72 AWY-HI	35.59294 -111.89519	34,000 ft 10,363 m	0	-	
CUTRO FIX	J72 AWY-HI	35.60472 -112.38333	28,900 ft 8,809 m	23	-	
PGS DME	J72 AWY-HI	35.62471 -113.54447	18,000 ft 5,486 m	56		PEACH SPRINGS VORTAC
KLAS APT	-	36.08097 -115.15345	0 ft 0 m	82		Mc Carran Intl

KABQ

Region: UNITED STATES
Timezone: AMERICA/DENVER
Runways: 3

Elevation: 5,354 ft / 1,632 m
Location: 35.038200 -106.610000
Magnetic Var: 7.891 E

METAR

KABQ 131952Z 04008KT 10SM FEW100 25/M02 A3002 RMK A02 SLP096 T02501022

TAF

TAF KABQ 131720Z 1318/1418 31006KT P6SM SKC FM131900 30008KT P6SM FEW200 FM140200 08008KT P6SM FEW200

Frequencies

REC - 118.00 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 119.20 MHz - CLNC DEL	GND - 121.90 MHz -
TWR - 123.77 MHz -	TWR - 120.30 MHz -
APP - 123.90 MHz - APP/DEP	APP - 124.40 MHz - APP/DEP
APP - 127.40 MHz - APP/DEP	APP - 134.80 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	150 ft	13,762 ft	90.43	CONCRETE	1,001 ft	551 ft
	46 m	4,195 m	82.53		305 m	168 m
26	150 ft	13,762 ft	270.45	CONCRETE	0 ft	1,001 ft
	46 m	4,195 m	262.56		0 m	305 m
03	150 ft	10,002 ft	44.66	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.77		0 m	122 m
21	150 ft	10,002 ft	224.67	CONCRETE	0 ft	0 ft
	46 m	3,049 m	216.78		0 m	0 m
12	150 ft	6,024 ft	128.99	CONCRETE	0 ft	0 ft
	46 m	1,836 m	121.10		0 m	0 m
30	150 ft	6,024 ft	309.00	CONCRETE	0 ft	0 ft
	46 m	1,836 m	301.11		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	ISPT	111.90 MHz	18 nm	-	-	5,374 ft
				33 km	-		5,374 m
03	LOC-ILS	IBZY	111.50 MHz	18 nm	44.67	-	5,354 ft
				33 km	36.78		5,354 m
08	LOC-ILS	ISPT	111.90 MHz	18 nm	90.44	-	5,354 ft
				33 km	82.55		5,354 m
03	GS	IBZY	111.50 MHz	10 nm	44.67	3.00	5,354 ft
				19 km	36.78		5,354 m
08	GS	ISPT	111.90 MHz	10 nm	90.44	3.00	5,354 ft
				19 km	82.55		5,354 m

KLAS

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 2,180 ft / 664 m
Location: 36.080700 -115.153000
Magnetic Var: 11.047 E

METAR

KLAS 131956Z 10007KT 060V120 10SM FEW100 33/M02 A2984 RMK A02 SLP078 T03331017

TAF

KLAS 131725Z 1318/1424 VRB06KT P6SM FEW150 FM132100 16010G16KT P6SM FEW100 FM140000 21010G16KT P6SM FEW100 FM140400 23010G16KT P6SM FEW100

Frequencies

REC - 132.40 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.00 MHz - CLEARANCE DELIVERY	GND - 121.10 MHz - LAS VEGAS GROUND
GND - 121.90 MHz - LAS VEGAS GROUND	TWR - 128.80 MHz - LAS VEGAS TOWER
TWR - 118.75 MHz - LAS VEGAS TOWER	TWR - 119.90 MHz - LAS VEGAS TOWER
APP - 125.60 MHz - LAS VEGAS APPROACH	APP - 125.02 MHz - LAS VEGAS APPROACH
DEP - 125.90 MHz - LAS VEGAS DEPARTURE	DEP - 133.95 MHz - LAS VEGAS DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	14,525 ft	89.92	CONCRETE	2,152 ft	0 ft
	46 m	4,427 m	78.88		656 m	0 m
26R	151 ft	14,525 ft	269.95	CONCRETE	1,414 ft	374 ft
	46 m	4,427 m	258.90		431 m	114 m
08R	151 ft	10,535 ft	89.92	CONCRETE	0 ft	381 ft
	46 m	3,211 m	78.87		0 m	116 m
26L	151 ft	10,535 ft	269.94	CONCRETE	0 ft	381 ft
	46 m	3,211 m	258.89		0 m	116 m
01R	151 ft	9,779 ft	24.82	CONCRETE	486 ft	400 ft
	46 m	2,981 m	13.77		148 m	122 m
19L	151 ft	9,779 ft	204.83	CONCRETE	876 ft	394 ft
	46 m	2,981 m	193.78		267 m	120 m
01L	151 ft	8,998 ft	24.82	CONCRETE	584 ft	400 ft
	46 m	2,743 m	13.78		178 m	122 m
19R	151 ft	8,998 ft	204.83	CONCRETE	0 ft	0 ft
	46 m	2,743 m	193.78		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICUA	110.10 MHz	18 nm	-	-	2,092 ft
				33 km	-		2,092 m
26R	DME	ILAS	110.30 MHz	18 nm	-	-	2,203 ft
				33 km	-		2,203 m
01L	LOC-ILS	ICUA	110.10 MHz	18 nm	24.83	-	2,180 ft
				33 km	13.78		2,180 m
26L	LOC-ILS	IRLE	111.50 MHz	18 nm	269.93	-	2,180 ft
				33 km	258.88		2,180 m
26R	LOC-ILS	ILAS	110.30 MHz	18 nm	269.94	-	2,180 ft
				33 km	258.89		2,180 m
01L	GS	ICUA	110.10 MHz	10 nm	24.83	3.40	2,180 ft
				19 km	13.78		2,180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	GS	IRLE	111.50 MHz	10 nm	269.93	3.00	2,180 ft
				19 km	258.88		2,180 m
26R	GS	ILAS	110.30 MHz	10 nm	269.94	3.00	2,180 ft
				19 km	258.89		2,180 m