

KJFK

John F Kennedy Int'l


KELZ

WELLSVILLE MUNI TARANTINE FLD

2024/05/04 2045Z

KJFK LECOR KELZ

209.51 nm / 388.00 km

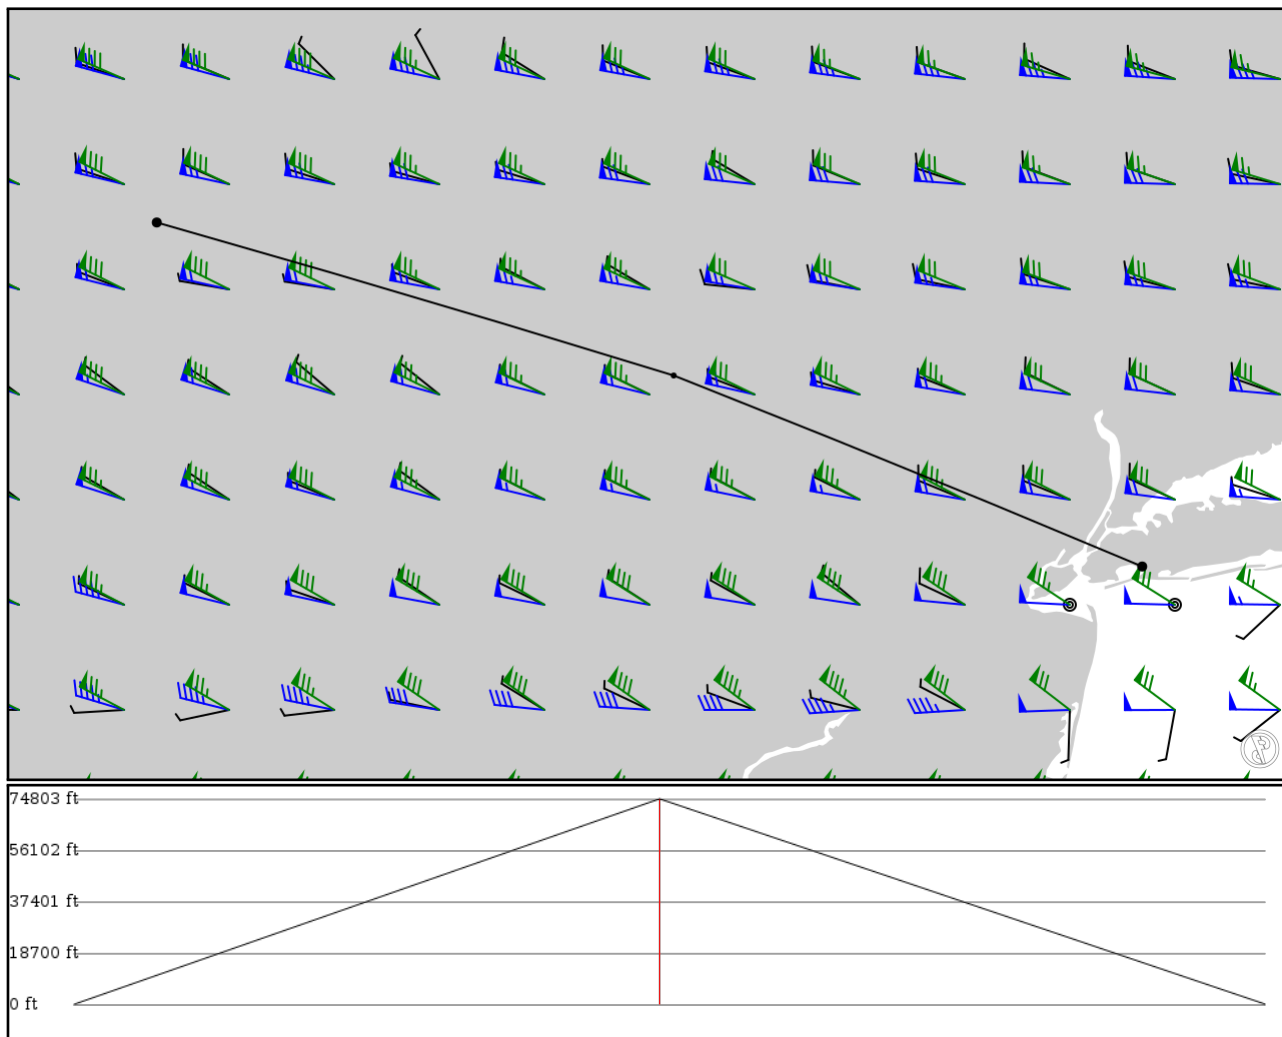

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type		Via	Lat Lon	Alt	Dist (nm)	Name
KJFK	-	40.63990	0 ft	-	John F Kennedy Int'l	
APT	-	-73.77870	0 m			
LECOR	-	41.45580	22,800 ft	103	-	
FIX	-	-75.78090	6,949 m			
KELZ	-	42.10950	0 ft	106	WELLSVILLE MUNI TARANTINE FLD	
APT	-	-77.99000	0 m			

KJFK

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 4

Elevation: 12 ft / 4 m
Location: 40.640100 -73.776500
Magnetic Var: 12.820 W

METAR

KJFK 041951Z 11009KT 10SM FEW025 BKN075 BKN130 OVC250 13/07 A3033 RMK A02 SLP270 T01280072

TAF

TAF AMD KJFK 041945Z 0420/0524 12011KT P6SM VCSH FEW025 BKN080 FM050300 11010KT P6SM OVC020 FM050500 10010KT P6SM

Frequencies

REC - 115.40 MHz - D-ATIS	REC - 117.70 MHz - D-ATIS
REC - 128.72 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 135.05 MHz - CLEARANCE DELIVERY	GND - 121.90 MHz - KENNEDY GROUND
GND - 121.65 MHz - KENNEDY GROUND	TWR - 119.10 MHz - KENNEDY TOWER
TWR - 123.90 MHz - KENNEDY TOWER	APP - 125.70 MHz - NEW YORK APPROACH
APP - 128.12 MHz - NEW YORK APPROACH	APP - 118.40 MHz - NEW YORK APPROACH
APP - 123.70 MHz - NEW YORK APPROACH	APP - 126.80 MHz - NEW YORK APPROACH
APP - 132.40 MHz - NEW YORK APPROACH	APP - 134.35 MHz - NEW YORK APPROACH
DEP - 135.90 MHz - NEW YORK DEPARTURE	DEP - 123.70 MHz - NEW YORK DEPARTURE
DEP - 124.75 MHz - NEW YORK DEPARTURE	DEP - 134.35 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
13R	200 ft	14,526 ft	120.83	CONCRETE	2,057 ft	390 ft
	61 m	4,428 m	133.65		627 m	119 m
31L	200 ft	14,526 ft	300.86	CONCRETE	3,271 ft	495 ft
	61 m	4,428 m	313.68		997 m	151 m
13L	151 ft	10,010 ft	120.85	CONCRETE	912 ft	387 ft
	46 m	3,051 m	133.67		278 m	118 m
31R	151 ft	10,010 ft	300.87	CONCRETE	1,037 ft	177 ft
	46 m	3,051 m	313.69		316 m	54 m
04R	200 ft	8,407 ft	30.67	ASPHALT	0 ft	440 ft
	61 m	2,562 m	43.49		0 m	134 m
22L	200 ft	8,407 ft	210.68	ASPHALT	0 ft	505 ft
	61 m	2,562 m	223.50		0 m	154 m
04L	200 ft	12,091 ft	30.67	CONCRETE	459 ft	200 ft
	61 m	3,685 m	43.49		140 m	61 m
22R	200 ft	12,091 ft	210.68	CONCRETE	3,425 ft	407 ft
	61 m	3,685 m	223.50		1,044 m	124 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IHIQ	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
04R	DME	IJFK	109.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
13L	DME	ITLK	111.50 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
22L	DME	IIWY	110.90 MHz	18 nm	-	-	13 ft
				33 km	-		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22R	DME	IJOC	109.50 MHz	18 nm 33 km	- -	-	13 ft 13 m
31R	DME	IRTH	111.50 MHz	18 nm 33 km	- -	-	13 ft 13 m
04L	LOC-ILS	IHIQ	110.90 MHz	18 nm 33 km	30.68 43.50	-	12 ft 12 m
04R	LOC-ILS	IJFK	109.50 MHz	18 nm 33 km	30.67 43.49	-	12 ft 12 m
13L	LOC-ILS	ITLK	111.50 MHz	18 nm 33 km	120.87 133.69	-	12 ft 12 m
22L	LOC-ILS	IIWY	110.90 MHz	18 nm 33 km	210.67 223.49	-	12 ft 12 m
22R	LOC-ILS	IJOC	109.50 MHz	18 nm 33 km	210.68 223.50	-	12 ft 12 m
31L	LOC-ILS	IMOH	111.35 MHz	18 nm 33 km	300.84 313.66	-	12 ft 12 m
31R	LOC-ILS	IRTH	111.50 MHz	18 nm 33 km	300.87 313.69	-	12 ft 12 m
04L	GS	IHIQ	110.90 MHz	10 nm 19 km	30.68 43.50	3.00	12 ft 12 m
04R	GS	IJFK	109.50 MHz	10 nm 19 km	30.67 43.49	3.00	12 ft 12 m
13L	GS	ITLK	111.50 MHz	10 nm 19 km	120.87 133.69	3.00	12 ft 12 m
22L	GS	IIWY	110.90 MHz	10 nm 19 km	210.67 223.49	3.00	12 ft 12 m
22R	GS	IJOC	109.50 MHz	10 nm 19 km	210.68 223.50	3.00	12 ft 12 m
31L	GS	IMOH	111.35 MHz	10 nm 19 km	300.84 313.66	3.00	12 ft 12 m
31R	GS	IRTH	111.50 MHz	10 nm 19 km	300.87 313.69	3.00	12 ft 12 m

KELZ

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 1

Elevation: 2,124 ft / 647 m
Location: 42.109500 -77.990000
Magnetic Var: 10.934 W

METAR

KELZ 042030Z AUTO 15014G24KT 10SM BKN021 OVC060 13/08 A3015 RMK A02 T01330083

TAF

UNKNOWN

Frequencies

REC - 119.27 MHz - ASOS

COM - 123.00 MHz - CTAF/UNICOM

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10	100 ft	5,288 ft	89.28	ASPHALT	400 ft	0 ft
	30 m	1,612 m	100.21		122 m	0 m
28	100 ft	5,288 ft	269.29	ASPHALT	0 ft	0 ft
	30 m	1,612 m	280.23		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28	LOC-LOC	IELZ	110.50 MHz	18 nm	269.27	-	2,124 ft
				33 km	280.21		2,124 m