

# WIII

Jakarta Soekarno-Hatta Intl


# YPAD

Adelaide Intl

2024/05/16 0526Z

WIII IMABA A585 MUTHA YPAD

2472.95 nm / 4579.91 km

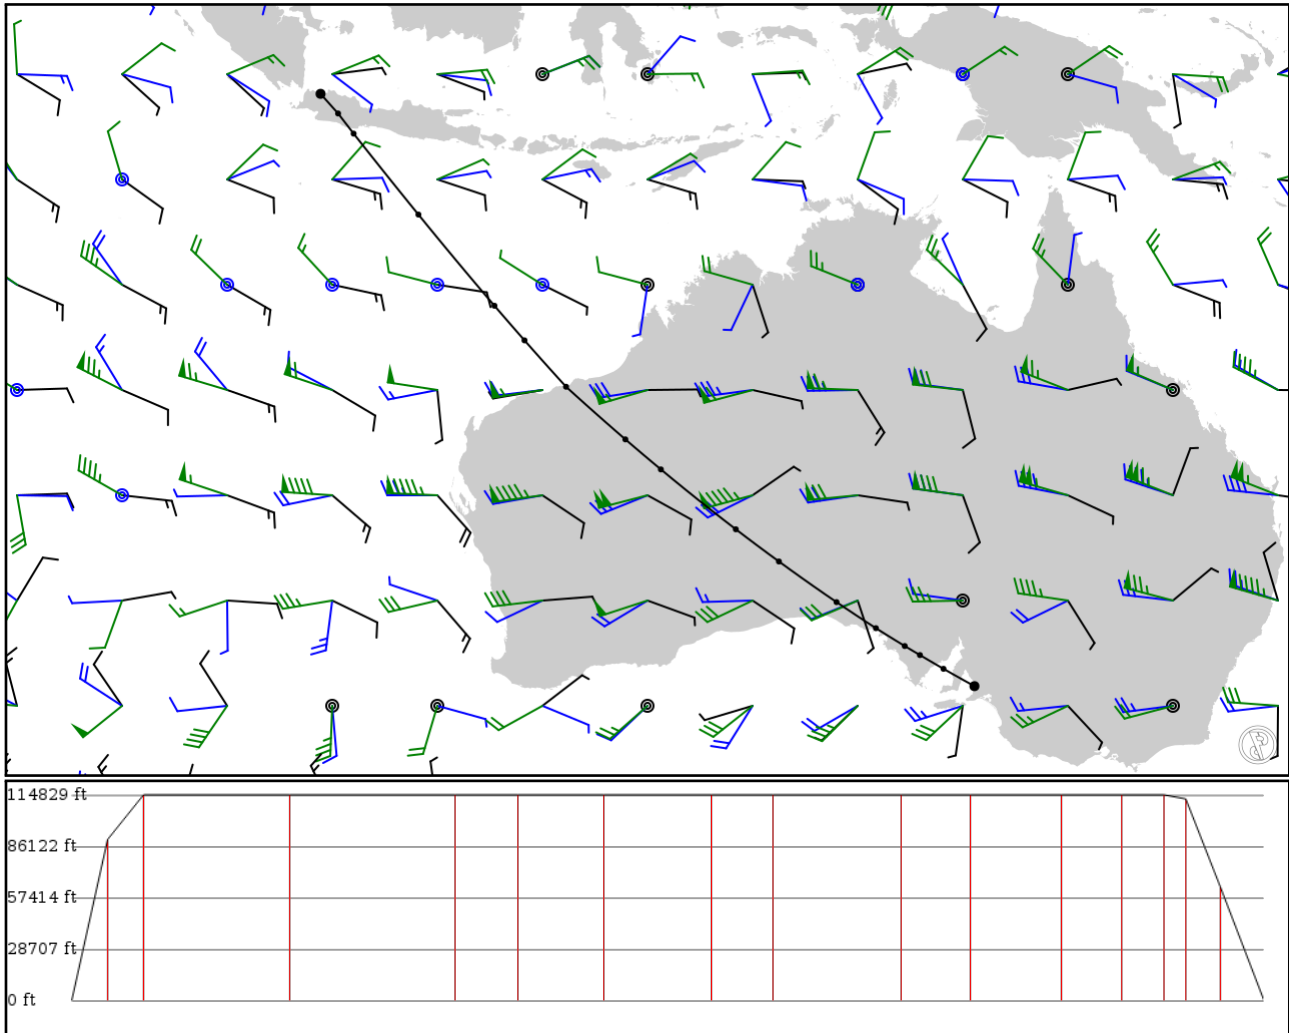

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
WIII APT	-	-6.12569 106.65700	0 ft 0 m	-	Jakarta Soekarno-Hatta Intl
IMABA FIX	-	-7.08088 107.51100	27,400 ft 8,352 m	76	-
IPKON FIX	A585 AWY-HI	-8.06217 108.26900	35,000 ft 10,668 m	74	-
SAPDA FIX	A585 AWY-HI	-12.00000 111.42700	35,000 ft 10,668 m	301	-
DOMOM FIX	A585 AWY-HI	-16.43690 115.13300	35,000 ft 10,668 m	342	-
OSOTO FIX	A585 AWY-HI	-18.12100 116.59800	35,000 ft 10,668 m	131	-
PD VOR	A585 AWY-HI	-20.37830 118.62300	35,000 ft 10,668 m	177	PORT HEDLAND
GUKON FIX	A585 AWY-HI	-22.93930 121.51500	35,000 ft 10,668 m	222	-
BIDAP FIX	A585 AWY-HI	-24.40130 123.24600	35,000 ft 10,668 m	129	-
LANOP FIX	A585 AWY-HI	-27.31480 126.89900	35,000 ft 10,668 m	263	-
PINAV FIX	A585 AWY-HI	-28.88170 129.00000	35,000 ft 10,668 m	145	-
BEZZA FIX	A585 AWY-HI	-30.85830 131.80800	35,000 ft 10,668 m	188	-
CDU NDB	A585 AWY-HI	-32.12670 133.72700	35,000 ft 10,668 m	124	CEDUNA
ABTOD FIX	A585 AWY-HI	-32.99500 135.13300	35,000 ft 10,668 m	88	-
FRAZA FIX	A585 AWY-HI	-33.43480 135.87400	34,300 ft 10,455 m	45	-
MUTHA FIX	A585 AWY-HI	-34.10340 137.02200	19,300 ft 5,883 m	69	-
YPAD APT	-	-34.94750 138.53000	0 ft 0 m	90	Adelaide Intl

## WIII

Region: INDONESIA  
Timezone: ASIA/JAKARTA  
Runways: 3

Elevation: 34 ft / 10 m  
Location: -6.119810 106.657000  
Magnetic Var: 0.529 E

## METAR

WIII 160500Z 04009KT 010V070 8000 SCT021 33/23 Q1009 NOSIG

## TAF

TAF WIII 152300Z 1600/1706 VRB02KT 4000 HZ FEW020 BECMG 1601/1603 05010KT 9000 NSW TEMPO 1614/1618 4000 TSRA FEW010

## Frequencies

REC - 126.85 MHz - ATIS	CLD - 121.95 MHz -
CLD - 124.25 MHz -	SOEKARNO-HATTA CLEARANCE DELIVERY
SOEKARNO-HATTA CLEARANCE DELIVERY	CLD - 125.15 MHz -
GND - 121.60 MHz - SOEKARNO-HATTA GROUND	SOEKARNO-HATTA CLEARANCE DELIVERY
GND - 128.85 MHz - SOEKARNO-HATTA GROUND	GND - 121.00 MHz - SOEKARNO-HATTA GROUND
TWR - 118.20 MHz - SOEKARNO-HATTA TOWER	GND - 128.95 MHz - SOEKARNO-HATTA GROUND
TWR - 119.30 MHz - SOEKARNO-HATTA TOWER	TWR - 118.75 MHz - SOEKARNO-HATTA TOWER
APP - 124.20 MHz - JAKARTA ARRIVAL	TWR - 120.25 MHz - SOEKARNO-HATTA TOWER
APP - 119.75 MHz - JAKARTA DIRECTOR	APP - 125.45 MHz - JAKARTA ARRIVAL
APP - 124.55 MHz - JAKARTA DIRECTOR	APP - 123.75 MHz - JAKARTA DIRECTOR
APP - 125.05 MHz - JAKARTA DIRECTOR	APP - 124.95 MHz - JAKARTA DIRECTOR
APP - 124.15 MHz - JAKARTA RADAR	APP - 127.90 MHz - JAKARTA DIRECTOR
APP - 125.35 MHz - JAKARTA RADAR	APP - 124.35 MHz - JAKARTA RADAR
APP - 127.95 MHz - JAKARTA RADAR	APP - 126.45 MHz - JAKARTA RADAR
	APP - 130.10 MHz - JAKARTA RADAR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	8,202 ft	68.13	ASPHALT	328 ft	846 ft
	46 m	2,500 m	67.61		100 m	258 m
24	150 ft	8,202 ft	248.13	ASPHALT	0 ft	0 ft
	46 m	2,500 m	247.60		0 m	0 m
07L	197 ft	11,820 ft	68.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	67.62		0 m	0 m
25R	197 ft	11,820 ft	248.15	ASPHALT	0 ft	0 ft
	60 m	3,603 m	247.62		0 m	0 m
07R	197 ft	12,015 ft	68.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	67.59		0 m	0 m
25L	197 ft	12,015 ft	248.12	ASPHALT	0 ft	0 ft
	60 m	3,662 m	247.59		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	LOC-ILS	ICHL	111.50 MHz	18 nm	68.13	-	21 ft
				33 km	67.60		21 m
07R	LOC-ILS	ICHR	110.50 MHz	18 nm	68.13	-	27 ft
				33 km	67.60		27 m
25L	LOC-ILS	ICGL	111.10 MHz	18 nm	248.12	-	34 ft
				33 km	247.59		34 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25R	LOC-ILS	ICGR	110.90 MHz	18 nm	248.13	-	29 ft
				33 km	247.60		29 m
07L	GS	ICHL	111.50 MHz	10 nm	68.25	3.00	29 ft
				19 km	67.72		29 m
07R	GS	ICHR	110.50 MHz	10 nm	68.24	3.00	34 ft
				19 km	67.71		34 m
25L	GS	ICGL	111.10 MHz	10 nm	248.24	3.00	27 ft
				19 km	247.71		27 m
25R	GS	ICGR	110.90 MHz	10 nm	248.25	3.00	21 ft
				19 km	247.72		21 m

## YPAD

Region: AUSTRALIA  
Timezone: AUSTRALIA/ADELAIDE  
Runways: 2

Elevation: 20 ft / 6 m  
Location: -34.947400 138.530000  
Magnetic Var: 7.847 E

## METAR

YPAD 160500Z 23009KT CAVOK 18/08 Q1026 OVER RANGES

## TAF

TAF YPAD 160223Z 1602/1706 24010KT CAVOK FM160900 13006KT CAVOK FM161200 05005KT CAVOK FM170000 18010KT 9999 SCT0

## Frequencies

REC - 116.40 MHz - ATIS	REC - 134.50 MHz - ATIS
CLD - 126.10 MHz - ADELAIDE DELIVERY	GND - 121.70 MHz - ADELAIDE GROUND
TWR - 120.50 MHz - ADELAIDE TOWER	APP - 124.20 MHz - ADELAIDE APPROACH
APP - 118.20 MHz - ADELAIDE APPROACH	DEP - 124.20 MHz - ADELAIDE DEPARTURE
DEP - 118.20 MHz - ADELAIDE DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	151 ft	10,170 ft	50.04	ASPHALT	492 ft	0 ft
	46 m	3,100 m	42.19		150 m	0 m
23	151 ft	10,170 ft	230.03	ASPHALT	0 ft	0 ft
	46 m	3,100 m	222.18		0 m	0 m
12	151 ft	5,417 ft	123.64	ASPHALT	0 ft	0 ft
	46 m	1,651 m	115.79		0 m	0 m
30	151 ft	5,417 ft	303.63	ASPHALT	0 ft	0 ft
	46 m	1,651 m	295.78		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
23	LOC-ILS	IAD	109.70 MHz	18 nm	230.03	-	20 ft
				33 km	222.19		20 m
23	GS	IAD	109.70 MHz	10 nm	230.03	3.00	20 ft
				19 km	222.19		20 m