

EFHK

Helsinki Vantaa Intl


EFKT

Kittila

2024/05/17 2224Z

EFHK ROMOP **Y75** RIBVU **M6** NEPIX EFKT

443.72 nm / 821.76 km

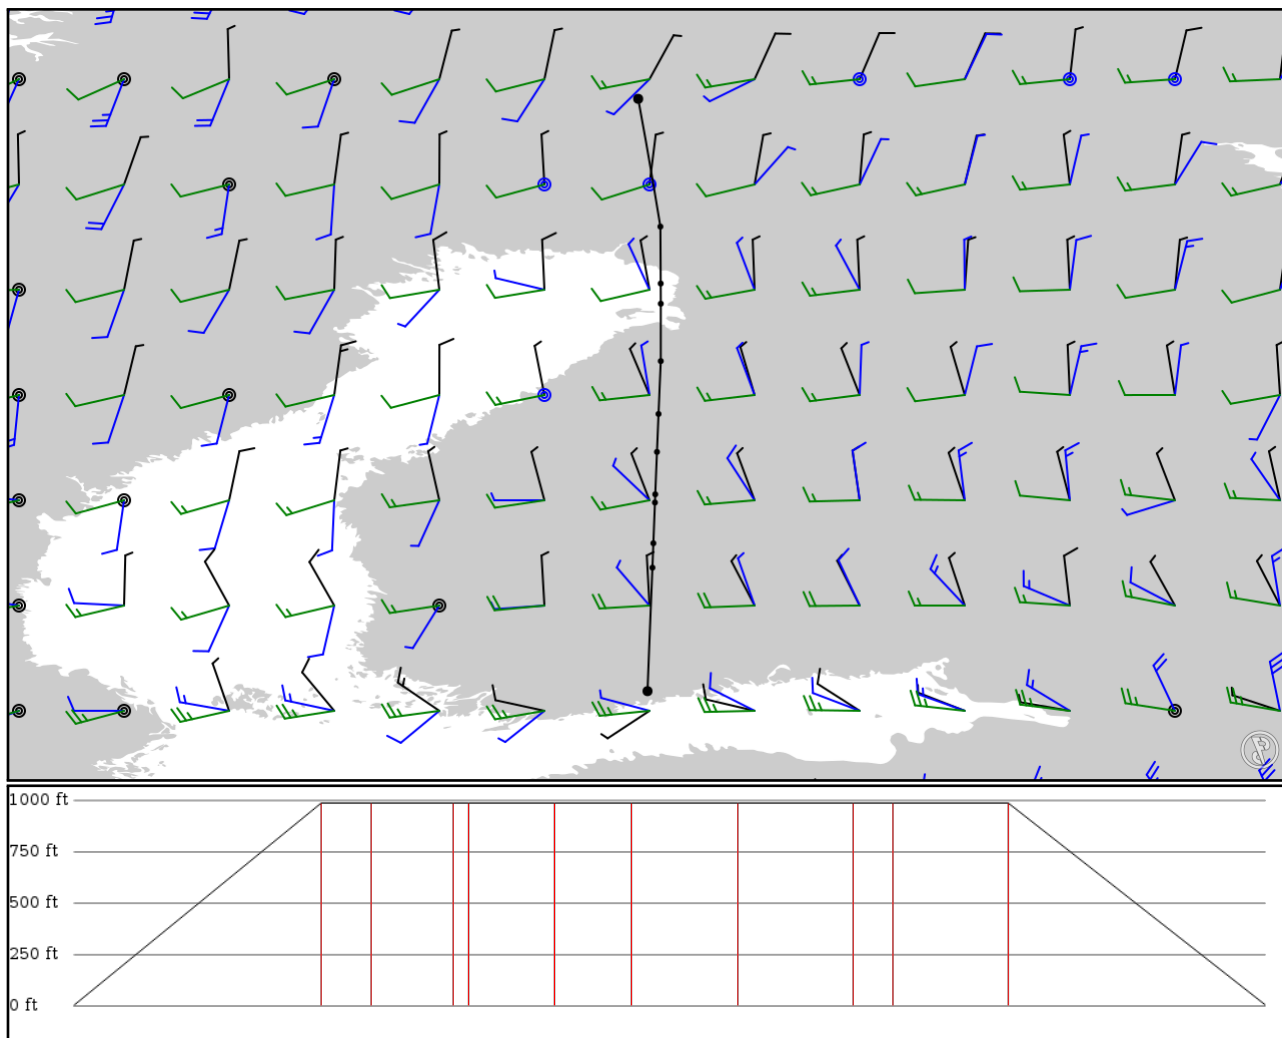

Notes

Basic altitude profile:

- Ascent Rate: 2400ft/min
- Ascent Speed: 280kts
- Cruise Altitude: 300ft
- Cruise Speed: 420kts
- Descent Rate: 2500ft/min
- Descent Speed: 215kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EFHK APT	-	60.31720 24.96330	0 ft 0 m	-	Helsinki Vantaa Intl
ROMOP FIX	-	61.85670 25.02470	300 ft 91 m	92	-
OTLUD FIX	Y75 AWY-HI	62.16080 25.03640	300 ft 91 m	18	-
OSKEK FIX	Y75 AWY-HI	62.66860 25.05610	300 ft 91 m	30	-
ADEDO FIX	Y75 AWY-HI	62.77110 25.06000	300 ft 91 m	6	-
MIMRU FIX	Y75 AWY-HI	63.29940 25.08140	300 ft 91 m	31	-
ELPOP FIX	Y75 AWY-HI	63.77250 25.10080	300 ft 91 m	28	-
SUVIB FIX	Y75 AWY-HI	64.43190 25.12890	300 ft 91 m	39	-
RIBVU FIX	Y75 AWY-HI	65.14720 25.12920	300 ft 91 m	42	-
ASLUP FIX	M6 AWY-HI	65.39860 25.12810	300 ft 91 m	15	-
NEPIX FIX	M6 AWY-HI	66.10830 25.12420	300 ft 91 m	42	-
EFKT APT	-	67.70100 24.84690	0 ft 0 m	95	Kittila

EFHK

Region: FINLAND
Timezone: EUROPE/HELSINKI
Runways: 3

Elevation: 180 ft / 55 m
Location: 60.320400 24.952200
Magnetic Var: 9.965 E

METAR

EFHK 172150Z VRB02KT CAVOK 09/06 Q1021 NOSIG

TAF

TAF TAF EFHK 172024Z 1721/1821 14004KT CAVOK

Frequencies

REC - 135.07 MHz - ATIS ARRIVAL	REC - 114.20 MHz - ATIS DEPARTURE
TWR - 119.70 MHz - HELSINKI TOWER	TWR - 118.85 MHz - HELSINKI TOWER
TWR - 118.60 MHz - HELSINKI TOWER	GND - 121.80 MHz - HELSINKI GROUND
GND - 118.12 MHz - HELSINKI GROUND	GND - 121.65 MHz - HELSINKI RAMP/TAXI
APP - 119.10 MHz - HELSINKI RADAR APPROACH	APP - 129.85 MHz - HELSINKI RADAR APPROACH
APP - 119.70 MHz - HELSINKI RADAR APPROACH	APP - 124.32 MHz - HELSINKI ARRIVAL
APP - 119.90 MHz - HELSINKI ARRIVAL	GND - 127.02 MHz - HELSINKI DE-ICING

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04R	197 ft	11,459 ft	47.48	ASPHALT	978 ft	210 ft
	60 m	3,493 m	37.52		298 m	64 m
22L	197 ft	11,459 ft	227.52	ASPHALT	0 ft	207 ft
	60 m	3,493 m	217.56		0 m	63 m
04L	197 ft	10,047 ft	47.42	ASPHALT	0 ft	236 ft
	60 m	3,062 m	37.46		0 m	72 m
22R	197 ft	10,047 ft	227.46	ASPHALT	253 ft	177 ft
	60 m	3,062 m	217.49		77 m	54 m
15	197 ft	9,497 ft	153.07	ASPHALT	0 ft	194 ft
	60 m	2,895 m	143.10		0 m	59 m
33	197 ft	9,497 ft	333.09	ASPHALT	0 ft	197 ft
	60 m	2,895 m	323.12		0 m	60 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	HTV	111.90 MHz	18 nm	-	-	165 ft
				33 km	-		165 m
04R	DME	HG	111.50 MHz	18 nm	-	-	206 ft
				33 km	-		206 m
15	DME	HL	109.10 MHz	18 nm	-	-	220 ft
				33 km	-		220 m
22L	DME	HK	110.30 MHz	18 nm	-	-	205 ft
				33 km	-		205 m
22R	DME	HUO	110.70 MHz	18 nm	-	-	207 ft
				33 km	-		207 m
04L	LOC-ILS	HTV	111.90 MHz	18 nm	47.45	-	180 ft
				33 km	37.49		180 m
04R	LOC-ILS	HG	111.50 MHz	18 nm	47.51	-	180 ft
				33 km	37.55		180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15	LOC-ILS	HL	109.10 MHz	18 nm	153.08	-	180 ft
				33 km	143.12		180 m
22L	LOC-ILS	HK	110.30 MHz	18 nm	227.51	-	180 ft
				33 km	217.55		180 m
22R	LOC-ILS	HUO	110.70 MHz	18 nm	227.45	-	180 ft
				33 km	217.49		180 m
04L	GS	HTV	111.90 MHz	10 nm	47.45	3.00	180 ft
				19 km	37.49		180 m
04R	GS	HG	111.50 MHz	10 nm	47.51	3.00	180 ft
				19 km	37.55		180 m
15	GS	HL	109.10 MHz	10 nm	153.08	3.00	180 ft
				19 km	143.12		180 m
22L	GS	HK	110.30 MHz	10 nm	227.51	3.00	180 ft
				19 km	217.55		180 m
22R	GS	HUO	110.70 MHz	10 nm	227.45	3.00	180 ft
				19 km	217.49		180 m

EFKT

Region: FINLAND
Timezone: EUROPE/HELSINKI
Runways: 1

Elevation: 645 ft / 197 m
Location: 67.701000 24.846800
Magnetic Var: 12.730 E

METAR

EFKT 172150Z AUTO VRB02KT CAVOK 13/06 Q1012

TAF

UNKNOWN

Frequencies

REC - 133.85 MHz - KITTILA ATIS
TWR - 118.95 MHz - KITTILA AFIS/TOWER

TWR - 119.70 MHz - KITTILA AFIS/TOWER

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16	148 ft	8,210 ft	166.15	ASPHALT	0 ft	0 ft
	45 m	2,502 m	153.42		0 m	0 m
34	148 ft	8,210 ft	346.17	ASPHALT	0 ft	0 ft
	45 m	2,502 m	333.43		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16	DME	HOU	111.90 MHz	18 nm	-	-	644 ft
				33 km	-		644 m
34	LOC-ILS	KT	111.90 MHz	18 nm	346.16	-	645 ft
				33 km	333.43		645 m
16	LOC-LOC	HOU	111.90 MHz	18 nm	166.16	-	645 ft
				33 km	153.43		645 m
16	GS	HOU	111.90 MHz	10 nm	166.16	3.00	645 ft
				19 km	153.43		645 m
34	GS	KT	111.90 MHz	10 nm	346.16	3.40	645 ft
				19 km	333.43		645 m