

RJBB

Kansai International


VHHH

Hong Kong Intl

2024/05/04 0132Z

RJBB POPPY Y34 SUKMO Y50 KOSHI A1 HLG HLG A1 SWORD MKG MKG A1 MAGOG VHHH

1386.16 nm / 2567.17 km

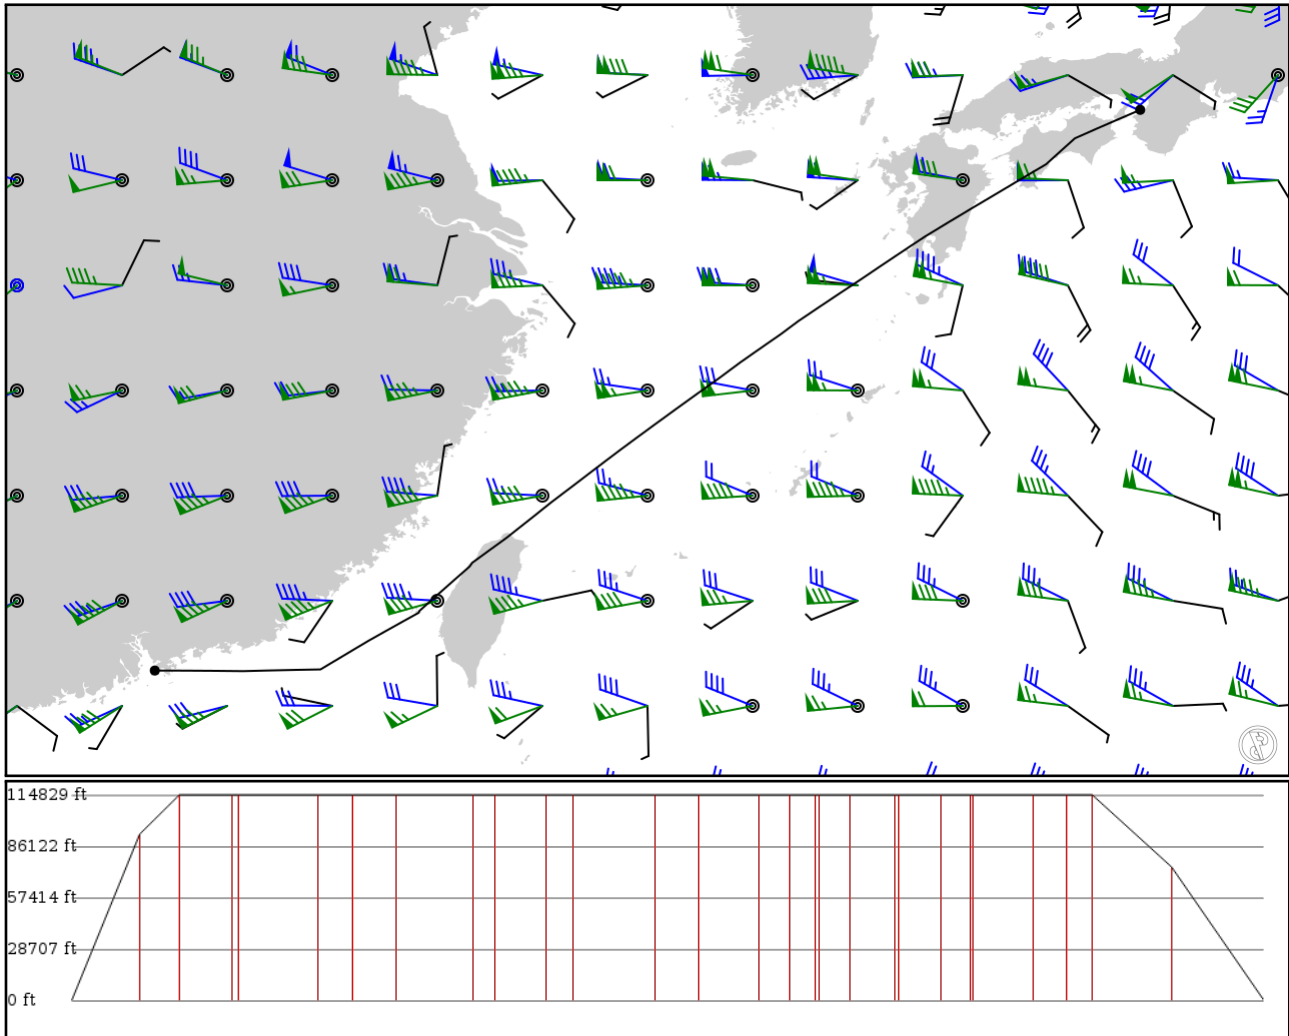

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJBB APT	-	34.43360 135.23400	0 ft 0 m	-	Kansai International
POPPY FIX	-	33.81810 133.82100	28,300 ft 8,626 m	79	-
SUKMO FIX	Y34 AWY-HI	33.25560 133.19600	35,000 ft 10,668 m	46	-
DONKY FIX	Y50 AWY-LO	32.65650 132.18500	35,000 ft 10,668 m	62	-
LEONA FIX	Y50 AWY-LO	32.59280 132.07700	35,000 ft 10,668 m	6	-
HKC VOR	Y50 AWY-LO	31.69720 130.58300	35,000 ft 10,668 m	93	KAGOSHIMA
KOSHI FIX	Y50 AWY-LO	31.28850 129.96500	35,000 ft 10,668 m	40	-
JEDAI FIX	A1 AWY-HI	30.77460 129.20100	35,000 ft 10,668 m	49	-
RUSAR FIX	A1 AWY-HI	29.86500 127.83700	35,000 ft 10,668 m	89	-
AKVAS FIX	A1 AWY-HI	29.58700 127.46500	35,000 ft 10,668 m	25	-
URUMA FIX	A1 AWY-HI	28.97010 126.57900	35,000 ft 10,668 m	59	-
SAPET FIX	A1 AWY-HI	28.63710 126.13100	35,000 ft 10,668 m	30	-
IGMON FIX	A1 AWY-HI	27.62210 124.72100	35,000 ft 10,668 m	96	-
BULAN FIX	A1 AWY-HI	27.09170 124.00000	35,000 ft 10,668 m	49	-
OSTAR FIX	A1 AWY-HI	26.33170 123.00000	35,000 ft 10,668 m	70	-
AISAR FIX	A1 AWY-HI	25.94750 122.49300	35,000 ft 10,668 m	35	-
DRAKE FIX	A1 AWY-HI	25.61560 122.07800	35,000 ft 10,668 m	30	-
ANNNA FIX	A1 AWY-HI	25.57180 122.02200	35,000 ft 10,668 m	4	-
APU VOR	A1 AWY-HI	25.17690 121.52200	35,000 ft 10,668 m	36	ANBU (TAIPEI)
HLG DME	A1 AWY-HI	24.64000 120.78300	35,000 ft 10,668 m	51	HOULONG VOR-DME
HLG VOR	- -	24.55980 120.72700	35,000 ft 10,668 m	5	HOULONG
SWORD FIX	A1 AWY-HI	24.00250 120.09400	35,000 ft 10,668 m	48	-
MKG VOR	- -	23.59540 119.63700	35,000 ft 10,668 m	35	MAGONG (PENGHU)
MKG DME	- -	23.56170 119.62800	35,000 ft 10,668 m	2	MAGONG TACAN
KADLO FIX	A1 AWY-HI	22.95510 118.54200	35,000 ft 10,668 m	70	-
ANPOG FIX	A1 AWY-HI	22.60420 117.95400	35,000 ft 10,668 m	38	-
ELATO	A1	22.33330	35,000 ft	29	-

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
FIX	AWY-HI	117.50000	10,668 m		
MAGOG	A1	22.29610	22,700 ft	93	-
FIX	AWY-HI	115.82500	6,919 m		
VHHH	-	22.30890	0 ft	106	Hong Kong Intl
APT	-	113.91500	0 m		

RJBB

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 17 ft / 5 m
Location: 34.433600 135.234000
Magnetic Var: 8.018 W

METAR

RJBB 040100Z 32003KT 280V010 9999 FEW020 18/15 Q1021 NOSIG

TAF

TAF TAF RJBB 032305Z 0400/0506 01004KT 9999 FEW025 BECMG 0401/0403 21010KT BECMG 0418/0421 06004KT BECMG 0503/0506 01004KT

Frequencies

APP - 120.25 MHz - KANSAI APPROACH	APP - 120.45 MHz - KANSAI APPROACH
APP - 125.50 MHz - KANSAI APPROACH	APP - 124.70 MHz - KANSAI APPROACH
APP - 121.15 MHz - KANSAI APPROACH	APP - 120.85 MHz - KANSAI APPROACH
APP - 125.00 MHz - KANSAI APPROACH	APP - 124.80 MHz - KANSAI APPROACH
APP - 121.20 MHz - KANSAI APPROACH	APP - 120.40 MHz - KANSAI APPROACH
DEP - 119.20 MHz - KANSAI DEPARTURE	DEP - 120.65 MHz - KANSAI DEPARTURE
DEP - 119.50 MHz - KANSAI DEPARTURE	DEP - 119.75 MHz - KANSAI DEPARTURE
TWR - 118.20 MHz - KANSAI TOWER	TWR - 118.05 MHz - KANSAI TOWER
TWR - 126.20 MHz - KANSAI TOWER	GND - 121.60 MHz - KANSAI GROUND
GND - 121.65 MHz - KANSAI GROUND	CLD - 121.90 MHz - KANSAI DELIVERY
REC - 127.85 MHz - ATIS	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	13,135 ft	50.85	ASPHALT	0 ft	187 ft
	60 m	4,004 m	58.87		0 m	57 m
24R	197 ft	13,135 ft	230.87	ASPHALT	0 ft	184 ft
	60 m	4,004 m	238.89		0 m	56 m
06R	197 ft	11,493 ft	50.87	ASPHALT	0 ft	187 ft
	60 m	3,503 m	58.88		0 m	57 m
24L	197 ft	11,493 ft	230.88	ASPHALT	0 ft	180 ft
	60 m	3,503 m	238.90		0 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	DME	IKD	108.10 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
24L	DME	IKN	110.70 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
06L	LOC-ILS	IKJ	108.70 MHz	18 nm	50.86	-	17 ft
				33 km	58.88		17 m
06R	LOC-ILS	IKD	108.10 MHz	18 nm	50.88	-	17 ft
				33 km	58.90		17 m
24L	LOC-ILS	IKN	110.70 MHz	18 nm	230.88	-	17 ft
				33 km	238.90		17 m
24R	LOC-ILS	IKW	108.50 MHz	18 nm	230.86	-	17 ft
				33 km	238.88		17 m
06L	GS	IKJ	108.70 MHz	10 nm	50.86	3.00	17 ft
				19 km	58.88		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	GS	IKD	108.10 MHz	10 nm	50.88	3.00	17 ft
				19 km	58.90		17 m
24L	GS	IKN	110.70 MHz	10 nm	230.88	3.00	17 ft
				19 km	238.90		17 m
24R	GS	IKW	108.50 MHz	10 nm	230.86	3.00	17 ft
				19 km	238.88		17 m

VHHH

Region: HONG KONG
Timezone: UNKNOWN
Runways: 2

Elevation: 27 ft / 8 m
Location: 22.308900 113.915000
Magnetic Var: 3.236 W

METAR

VHHH 040100Z 12006KT 060V200 1800 1400E R07R/P2000D R25L/1700D R07L/P2000N R25R/P2000N +SHRA FEW006 FEW010CB SCT0

TAF

TAF VHHH 032300Z 0400/0506 12015KT 9999 FEW015 SCT020 TX27/0406Z TX28/0506Z TN24/0422Z TEMPO 0400/0406 3000 TSRA

Frequencies

REC - 128.20 MHz - D-ATIS	REC - 127.05 MHz - D-ATIS
GND - 121.60 MHz - HONG KONG GROUND	GND - 122.55 MHz - HONG KONG GROUND
GND - 121.87 MHz - HONG KONG GROUND	TWR - 118.20 MHz - HONG KONG TOWER
TWR - 118.40 MHz - HONG KONG TOWER	TWR - 118.70 MHz - HONG KONG TOWER
CLD - 124.65 MHz - HONG KONG CLEARANCE DELIVERY	CLD - 129.90 MHz - HONG KONG CLEARANCE DELIVERY
DEP - 122.00 MHz - HONG KONG DEPARTURE	DEP - 123.80 MHz - HONG KONG DEPARTURE
DEP - 124.05 MHz - HONG KONG DEPARTURE	APP - 119.10 MHz - HONG KONG APPROACH
APP - 119.35 MHz - HONG KONG APPROACH	APP - 119.55 MHz - HONG KONG DIRECT

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07L	197 ft	12,462 ft	70.77	ASPHALT	554 ft	974 ft
	60 m	3,799 m	74.01		169 m	297 m
25R	197 ft	12,462 ft	250.79	ASPHALT	571 ft	978 ft
	60 m	3,799 m	254.02		174 m	298 m
07R	197 ft	12,463 ft	70.79	ASPHALT	518 ft	886 ft
	60 m	3,799 m	74.02		158 m	270 m
25L	197 ft	12,463 ft	250.80	ASPHALT	0 ft	981 ft
	60 m	3,799 m	254.04		0 m	299 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07L	DME	IZSL	111.10 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
07R	DME	ISR	109.30 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25L	DME	IFL	108.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
25R	DME	ITFR	110.90 MHz	18 nm	-	-	19 ft
				33 km	-		19 m
07L	LOC-ILS	IZSL	111.10 MHz	18 nm	70.78	-	27 ft
				33 km	74.02		27 m
07R	LOC-ILS	ISR	109.30 MHz	18 nm	70.79	-	27 ft
				33 km	74.03		27 m
25L	LOC-ILS	IFL	108.90 MHz	18 nm	250.79	-	27 ft
				33 km	254.03		27 m
25R	LOC-ILS	ITFR	110.90 MHz	18 nm	250.78	-	27 ft
				33 km	254.02		27 m
07L	GS	IZSL	111.10 MHz	10 nm	70.78	3.00	27 ft
				19 km	74.02		27 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07R	GS	ISR	109.30 MHz	10 nm	70.79	3.00	27 ft
				19 km	74.03		27 m
25L	GS	IFL	108.90 MHz	10 nm	250.79	3.00	27 ft
				19 km	254.03		27 m
25R	GS	ITFR	110.90 MHz	10 nm	250.78	3.00	27 ft
				19 km	254.02		27 m