

EHAM

Amsterdam Schiphol Airport


EHBK

Maastricht

2024/04/28 0234Z

EHAM EHN EHBK

91.75 nm / 169.93 km

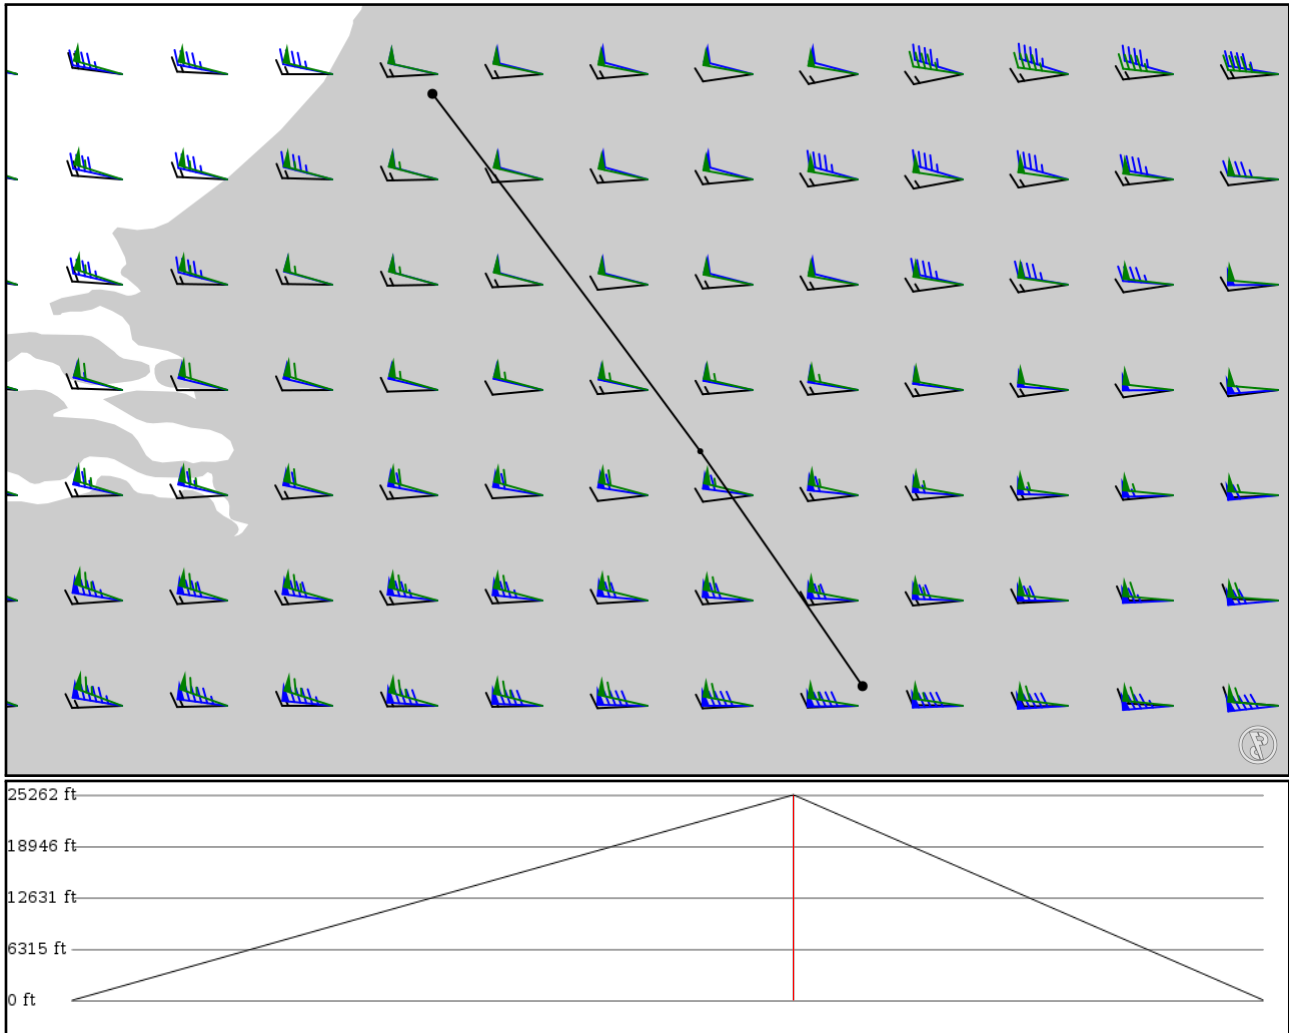

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: no

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EHAM APT	-	52.30810 4.76417	0 ft 0 m	-	Amsterdam Schiphol Airport
EHN NDB	-	51.46790 5.39486	7,700 ft 2,347 m	55	EINDHOVEN
EHBK APT	-	50.91580 5.77694	0 ft 0 m	36	Maastricht

EHAM

Region: NETHERLANDS
Timezone: EUROPE/AMSTERDAM
Runways: 6

Elevation: -11 ft / -3 m
Location: 52.308100 4.764170
Magnetic Var: 2.038 E

METAR

EHAM 280155Z 14015KT CAVOK 14/09 Q1002 NOSIG

TAF

TAF EHAM 272254Z 2800/2906 14012KT CAVOK BECMG 2806/2809 18020KT BECMG 2809/2811 19024G34KT PROB30 TEMPO 2810/2811 18020KT

Frequencies

GND - 121.55 MHz - SCHIPHOL GROUND	GND - 121.70 MHz - SCHIPHOL GROUND
GND - 121.80 MHz - SCHIPHOL GROUND	GND - 121.90 MHz - SCHIPHOL GROUND
GND - 121.60 MHz - SCHIPHOL GROUND	TWR - 119.22 MHz - SCHIPHOL TOWER
TWR - 118.10 MHz - SCHIPHOL TOWER	TWR - 118.27 MHz - SCHIPHOL TOWER
TWR - 119.90 MHz - SCHIPHOL TOWER	APP - 118.80 MHz - AMSTERDAM RADAR
APP - 120.55 MHz - AMSTERDAM RADAR	APP - 127.78 MHz - AMSTERDAM RADAR
APP - 119.05 MHz - SCHIPHOL APPROACH	APP - 118.08 MHz - SCHIPHOL APPROACH
APP - 126.68 MHz - SCHIPHOL APPROACH	APP - 118.40 MHz - SCHIPHOL ARRIVAL
APP - 131.15 MHz - SCHIPHOL ARRIVAL	DEP - 121.20 MHz - SCHIPHOL DEPARTURE
REC - 122.20 MHz - SCHIPHOL ATIS	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	145 ft	11,319 ft	86.77	ASPHALT	325 ft	0 ft
	44 m	3,450 m	84.74		99 m	0 m
27	145 ft	11,319 ft	266.81	ASPHALT	0 ft	0 ft
	44 m	3,450 m	264.77		0 m	0 m
18L	150 ft	11,150 ft	183.24	ASPHALT	1,886 ft	0 ft
	46 m	3,399 m	181.20		575 m	0 m
36R	150 ft	11,150 ft	3.24	ASPHALT	0 ft	0 ft
	46 m	3,399 m	1.20		0 m	0 m
18C	145 ft	10,813 ft	183.22	ASPHALT	0 ft	0 ft
	44 m	3,296 m	181.18		0 m	0 m
36C	145 ft	10,813 ft	3.22	ASPHALT	1,473 ft	0 ft
	44 m	3,296 m	1.18		449 m	0 m
18R	190 ft	12,467 ft	183.19	ASPHALT	886 ft	0 ft
	58 m	3,800 m	181.15		270 m	0 m
36L	190 ft	12,467 ft	3.19	ASPHALT	0 ft	0 ft
	58 m	3,800 m	1.15		0 m	0 m
06	150 ft	11,288 ft	57.85	ASPHALT	814 ft	0 ft
	46 m	3,441 m	55.82		248 m	0 m
24	150 ft	11,288 ft	237.89	ASPHALT	0 ft	0 ft
	46 m	3,441 m	235.85		0 m	0 m
04	140 ft	6,624 ft	41.18	ASPHALT	0 ft	0 ft
	43 m	2,019 m	39.15		0 m	0 m
22	140 ft	6,624 ft	221.20	ASPHALT	0 ft	0 ft
	43 m	2,019 m	219.16		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	KAG	110.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
18R	DME	VPB	110.10 MHz	18 nm 33 km	- -	-	-11 ft -11 m
22	DME	SCH	109.15 MHz	18 nm 33 km	- -	-	-11 ft -11 m
27	DME	BVB	111.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36C	DME	MSA	108.75 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36R	DME	ABA	111.95 MHz	18 nm 33 km	- -	-	-11 ft -11 m
06	LOC-ILS	KAG	110.55 MHz	18 nm 33 km	57.88 55.84	-	-11 ft -11 m
18C	LOC-ILS	ZWA	109.50 MHz	18 nm 33 km	183.22 181.18	-	-11 ft -11 m
18R	LOC-ILS	VPB	110.10 MHz	18 nm 33 km	183.19 181.15	-	-11 ft -11 m
22	LOC-ILS	SCH	109.15 MHz	18 nm 33 km	221.20 219.16	-	-11 ft -11 m
27	LOC-ILS	BVB	111.55 MHz	18 nm 33 km	266.79 264.75	-	-11 ft -11 m
36C	LOC-ILS	MSA	108.75 MHz	18 nm 33 km	3.22 1.18	-	-11 ft -11 m
36R	LOC-ILS	ABA	111.95 MHz	18 nm 33 km	3.24 1.20	-	-11 ft -11 m
06	GS	KAG	110.55 MHz	10 nm 19 km	57.88 55.84	3.00	-11 ft -11 m
18C	GS	ZWA	109.50 MHz	10 nm 19 km	183.22 181.18	3.00	-11 ft -11 m
18R	GS	VPB	110.10 MHz	10 nm 19 km	183.19 181.15	3.00	-11 ft -11 m
22	GS	SCH	109.15 MHz	10 nm 19 km	221.20 219.16	3.00	-11 ft -11 m
27	GS	BVB	111.55 MHz	10 nm 19 km	266.79 264.75	3.00	-11 ft -11 m
36C	GS	MSA	108.75 MHz	10 nm 19 km	3.22 1.18	3.00	-11 ft -11 m
36R	GS	ABA	111.95 MHz	10 nm 19 km	3.24 1.20	3.00	-11 ft -11 m

EHBK

Region: NETHERLANDS
Timezone: EUROPE/AMSTERDAM
Runways: 1

Elevation: 375 ft / 114 m
Location: 50.915800 5.776940
Magnetic Var: 2.383 E

METAR

EHBK 280155Z AUTO 18008KT 140V210 9999 NSC 14/06 Q1003

TAF

TAF EHBK 272247Z 2800/2906 15008KT CAVOK BECMG 2805/2808 21020G30KT BECMG 2815/2818 22012KT BECMG 2819/2822 18004

Frequencies

REC - 124.57 MHz - MAASTRICHT INFORMATION
TWR - 119.70 MHz - BEEK TOWER
APP - 123.97 MHz - BEEK APPROACH

TWR - 119.47 MHz - BEEK TOWER
CLD - 121.82 MHz - BEEK DELIVERY
APP - 120.20 MHz - BEEK APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03	148 ft	9,019 ft	32.54	ASPHALT	810 ft	0 ft
	45 m	2,749 m	30.16		247 m	0 m
21	148 ft	9,019 ft	212.56	ASPHALT	814 ft	0 ft
	45 m	2,749 m	210.18		248 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03	DME	BKZ	111.55 MHz	18 nm	-	-	375 ft
				33 km	-		375 m
21	DME	BKN	111.55 MHz	18 nm	-	-	375 ft
				33 km	-		375 m
03	LOC-ILS	BKZ	111.55 MHz	18 nm	32.56	-	375 ft
				33 km	30.18		375 m
21	LOC-ILS	BKN	111.55 MHz	18 nm	212.56	-	375 ft
				33 km	210.18		375 m
03	GS	BKZ	111.55 MHz	10 nm	32.56	3.00	375 ft
				19 km	30.18		375 m
21	GS	BKN	111.55 MHz	10 nm	212.56	3.00	375 ft
				19 km	210.18		375 m