

# KSFO

San Francisco Intl


# KATL

Hartsfield Jackson Atlanta Intl

2024/05/23 0510Z

KSFO HABXU V244 NIKOL T298 OAL J58 MLF J28 FLOOD Q128 MUDHO MEM J66 CALCO KATL

1866.01 nm / 3455.85 km

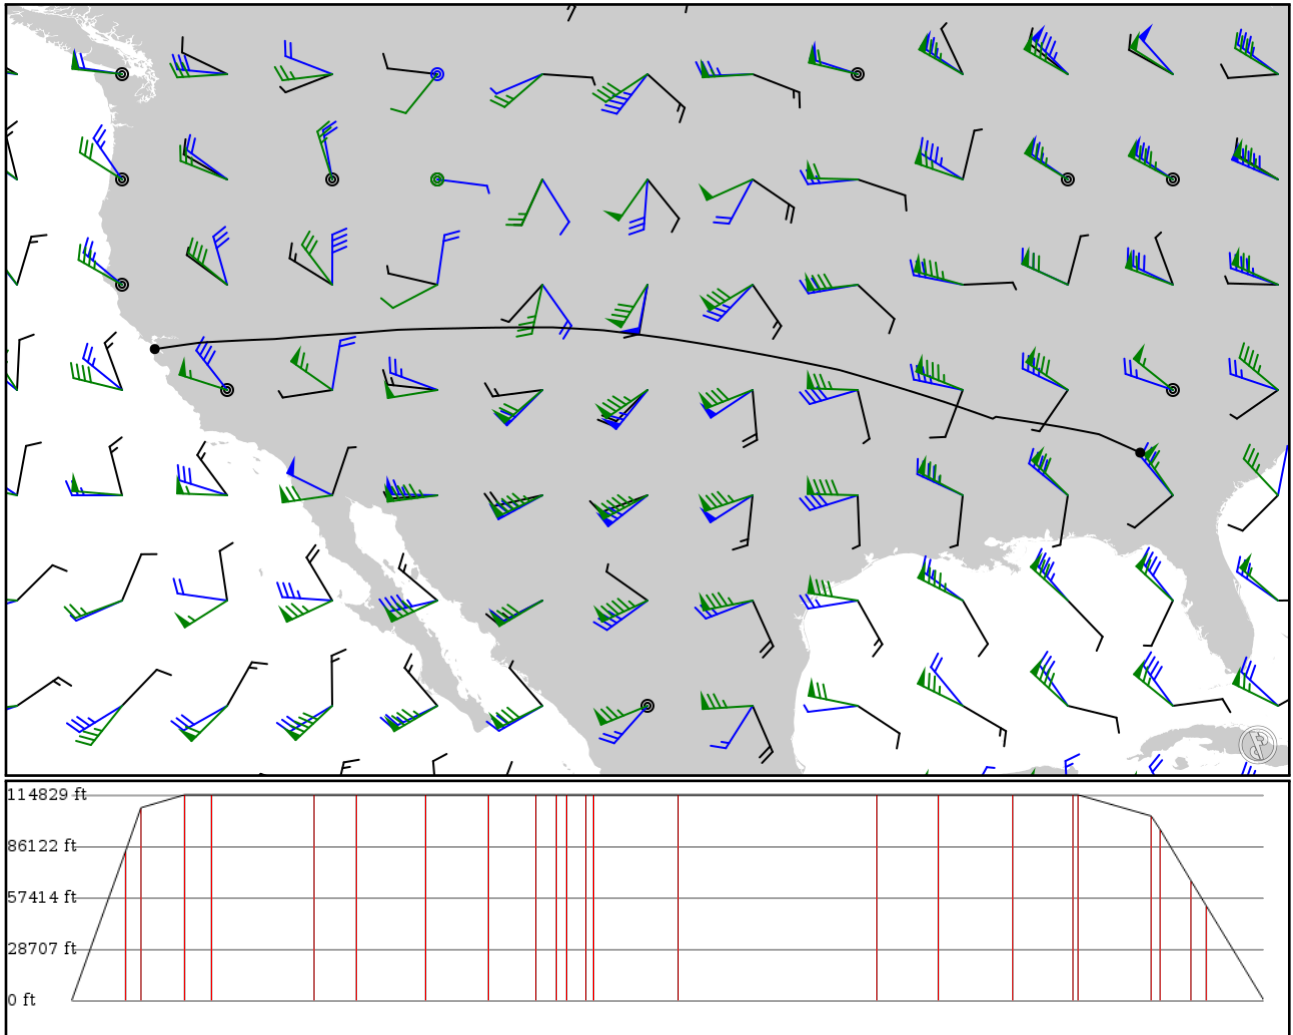

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 500kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSFO	-	37.61850	0 ft	-	San Francisco Intl
APT	-	-122.37500	0 m		
HABXU	-	37.86790	25,400 ft	84	-
FIX	-	-120.61900	7,742 m		
DUCKE	V244	37.89770	32,800 ft	24	-
FIX	AWY-LO	-120.10100	9,997 m		
NIKOL	V244	37.96750	35,000 ft	67	-
FIX	AWY-LO	-118.68300	10,668 m		
OAL	T298	38.00330	35,000 ft	43	COALDALE
VOR	AWY-LO	-117.77000	10,668 m		
ILC	J58	38.25020	35,000 ft	160	WILSON CREEK
VOR	AWY-HI	-114.39400	10,668 m		
MLF	J58	38.36040	35,000 ft	65	MILFORD
VOR	AWY-HI	-113.01300	10,668 m		
HVE	J28	38.41680	35,000 ft	108	HANKSVILLE
VOR	AWY-HI	-110.70000	10,668 m		
BDROC	J28	38.45090	35,000 ft	98	-
FIX	AWY-HI	-108.60600	10,668 m		
HBU	J28	38.45210	35,000 ft	73	BLUE MESA (GUNNISON)
VOR	AWY-HI	-107.04000	10,668 m		
ELWAY	J28	38.41570	35,000 ft	32	-
FIX	AWY-HI	-106.34300	10,668 m		
KANON	J28	38.39590	35,000 ft	16	-
FIX	AWY-HI	-105.99200	10,668 m		
RODDY	J28	38.35850	35,000 ft	28	-
FIX	AWY-HI	-105.37900	10,668 m		
FLOOD	J28	38.34000	35,000 ft	13	-
FIX	AWY-HI	-105.09400	10,668 m		
ZAROS	Q128	37.98930	35,000 ft	131	-
FIX	AWY-HI	-102.33900	10,668 m		
VEGUC	Q128	36.81450	35,000 ft	309	-
FIX	AWY-HI	-96.01240	10,668 m		
VLUST	Q128	36.25350	35,000 ft	97	-
FIX	AWY-HI	-94.10740	10,668 m		
ECIGE	Q128	35.56480	35,000 ft	114	-
FIX	AWY-HI	-91.90230	10,668 m		
MUDHO	Q128	34.94160	35,000 ft	95	-
FIX	AWY-HI	-90.10710	10,668 m		
MEM	-	35.01510	35,000 ft	7	MEMPHIS
VOR	-	-89.98320	10,668 m		
BEATS	J66	34.65990	31,400 ft	115	-
FIX	AWY-HI	-87.68660	9,571 m		
DEVAC	J66	34.61810	29,100 ft	12	-
FIX	AWY-HI	-87.43520	8,870 m		
WODDY	J66	34.43760	20,400 ft	48	-
FIX	AWY-HI	-86.48810	6,218 m		
CALCO	J66	34.34530	16,100 ft	23	-
FIX	AWY-HI	-86.01940	4,907 m		
KATL	-	33.63670	0 ft	89	Hartsfield Jackson Atlanta Intl
APT	-	-84.42790	0 m		

## KSFO

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 4

Elevation: 13 ft / 4 m  
Location: 37.618500 -122.375000  
Magnetic Var: 12.840 E

## METAR

KSFO 230456Z 28018G25KT 10SM CLR 13/07 A2992 RMK A02 PK WND 29028/0425 SLP130 T01280072

## TAF

KSFO 230359Z 2304/2406 28018G24KT P6SM SKC FM230500 28014KT P6SM SKC FM232200 28018G28KT P6SM SKC FM240500 28014KT

## Frequencies

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.06		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.06		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.08		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.88		0 m	136 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m

## KATL

Region: UNITED STATES  
Timezone: AMERICA/NEW\_YORK  
Runways: 5

Elevation: 1,026 ft / 313 m  
Location: 33.636600 -84.428000  
Magnetic Var: 5.633 W

## METAR

KATL 230452Z 17003KT 10SM FEW200 BKN250 23/18 A3002 RMK A02 SLP157 T02330178 403060194

## TAF

TAF AMD KATL 230400Z 2304/2406 24003KT P6SM FEW180 SCT250 FM231500 21005KT P6SM FEW040 BKN200 FM231700 23008KT P6SM

## Frequencies

REC - 119.65 MHz - D-ATIS	REC - 125.55 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.10 MHz - CLEARANCE DELIVERY
GND - 121.65 MHz - ATLANTA GROUND	GND - 121.75 MHz - ATLANTA GROUND
GND - 121.90 MHz - ATLANTA GROUND	TWR - 119.10 MHz - ATLANTA TOWER
TWR - 119.30 MHz - ATLANTA TOWER	TWR - 119.50 MHz - ATLANTA TOWER
TWR - 123.85 MHz - ATLANTA TOWER	TWR - 125.32 MHz - ATLANTA TOWER
APP - 127.90 MHz - ATLANTA APPROACH	APP - 128.00 MHz - ATLANTA APPROACH
DEP - 125.65 MHz - ATLANTA DEPARTURE	DEP - 125.70 MHz - ATLANTA DEPARTURE
DEP - 135.37 MHz - ATLANTA DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09L	151 ft	12,400 ft	89.99	CONCRETE	0 ft	0 ft
	46 m	3,780 m	95.62		0 m	0 m
27R	151 ft	12,400 ft	270.01	CONCRETE	518 ft	0 ft
	46 m	3,780 m	275.65		158 m	0 m
09R	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
27L	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.63		0 m	0 m
08L	151 ft	9,008 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.61		0 m	0 m
26R	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.63		0 m	0 m
10	151 ft	9,008 ft	89.97	CONCRETE	0 ft	0 ft
	46 m	2,746 m	95.60		0 m	0 m
28	151 ft	9,008 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	2,746 m	275.62		0 m	0 m
08R	151 ft	10,009 ft	89.98	CONCRETE	0 ft	0 ft
	46 m	3,051 m	95.61		0 m	0 m
26L	151 ft	10,009 ft	269.99	CONCRETE	0 ft	0 ft
	46 m	3,051 m	275.63		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	IHFV	109.30 MHz	18 nm	-	-	993 ft
				33 km	-		993 m
08R	DME	IATL	109.90 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09L	DME	IHZK	110.50 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
09R	DME	IFUN	108.90 MHz	18 nm	-	-	987 ft
				33 km	-		987 m
10	DME	IOMO	111.55 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
26L	DME	IBRU	108.70 MHz	18 nm	-	-	1,026 ft
				33 km	-		1,026 m
26R	DME	IGXZ	110.10 MHz	18 nm	-	-	1,000 ft
				33 km	-		1,000 m
27L	DME	IFSQ	108.50 MHz	18 nm	-	-	1,020 ft
				33 km	-		1,020 m
27R	DME	IAFA	111.30 MHz	18 nm	-	-	978 ft
				33 km	-		978 m
28	DME	IPKU	111.75 MHz	18 nm	-	-	970 ft
				33 km	-		970 m
08L	LOC-ILS	IHFV	109.30 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
08R	LOC-ILS	IATL	109.90 MHz	18 nm	89.99	-	1,026 ft
				33 km	95.62		1,026 m
09L	LOC-ILS	IHZK	110.50 MHz	18 nm	90.01	-	968 ft
				33 km	95.64		968 m
09R	LOC-ILS	IFUN	108.90 MHz	18 nm	89.98	-	1,026 ft
				33 km	95.61		1,026 m
10	LOC-ILS	IOMO	111.55 MHz	18 nm	89.98	-	970 ft
				33 km	95.61		970 m
26L	LOC-ILS	IBRU	108.70 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
26R	LOC-ILS	IGXZ	110.10 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27L	LOC-ILS	IFSQ	108.50 MHz	18 nm	269.98	-	1,026 ft
				33 km	275.61		1,026 m
27R	LOC-ILS	IAFA	111.30 MHz	18 nm	270.00	-	1,026 ft
				33 km	275.63		1,026 m
28	LOC-ILS	IPKU	111.75 MHz	18 nm	269.97	-	970 ft
				33 km	275.60		970 m
08L	GS	IHFV	109.30 MHz	10 nm	90.96	3.00	1,008 ft
				19 km	96.59		1,008 m
08R	GS	IATL	109.90 MHz	10 nm	90.96	3.00	1,012 ft
				19 km	96.59		1,012 m
09L	GS	IHZK	110.50 MHz	10 nm	90.02	3.00	1,017 ft
				19 km	95.65		1,017 m
09R	GS	IFUN	108.90 MHz	10 nm	90.96	3.00	1,021 ft
				19 km	96.59		1,021 m
10	GS	IOMO	111.55 MHz	10 nm	90.94	3.00	985 ft
				19 km	96.57		985 m
26L	GS	IBRU	108.70 MHz	10 nm	270.96	3.00	992 ft
				19 km	276.59		992 m
26R	GS	IGXZ	110.10 MHz	10 nm	270.96	3.00	984 ft
				19 km	276.59		984 m
27L	GS	IFSQ	108.50 MHz	10 nm	270.96	3.00	990 ft
				19 km	276.59		990 m
27R	GS	IAFA	111.30 MHz	10 nm	270.02	3.00	981 ft
				19 km	275.65		981 m
28	GS	IPKU	111.75 MHz	10 nm	270.94	3.00	990 ft
				19 km	276.57		990 m