


2024/05/09 0147Z

KSFO FOWND MLBEC KPDX

509.78 nm / 944.12 km

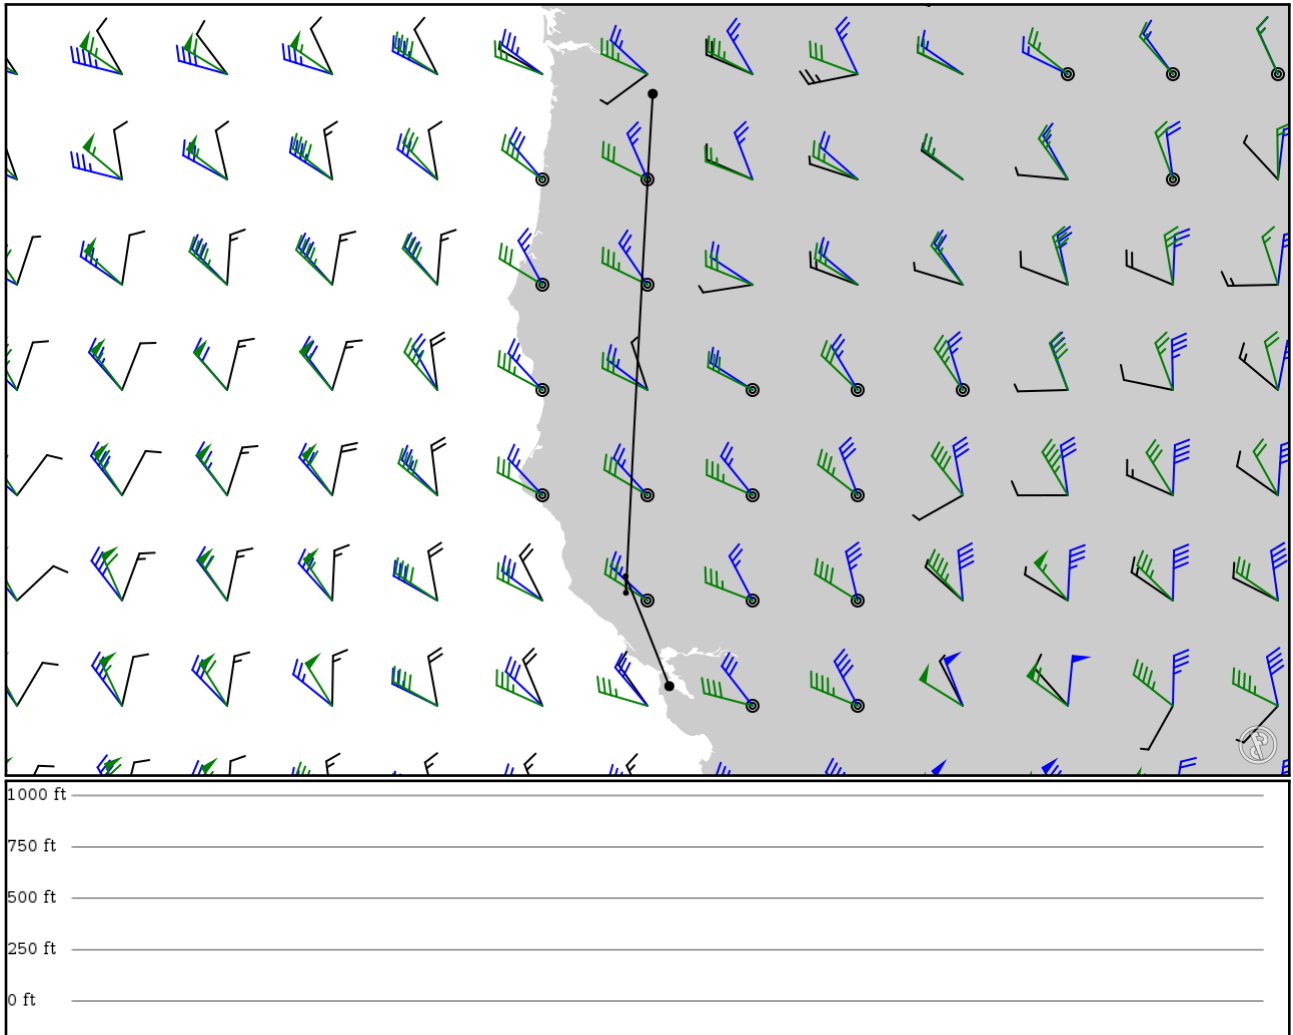

Notes

Requested: KSFO FAMUK Q3 FOWND MLBEC KPDX

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSFO	-	37.61850	0 ft	-	San Francisco Intl
APT	-	-122.37500	0 m		
FOWN	-	39.09610	0 ft	92	-
FIX	-	-122.96300	0 m		
MLBEC	-	38.87480	0 ft	13	-
FIX	-	-122.95900	0 m		
KPDX	-	45.58860	0 ft	403	Portland Intl
APT	-	-122.59800	0 m		

KSFO

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 13 ft / 4 m
Location: 37.618500 -122.375000
Magnetic Var: 12.844 E

METAR

KSFO 090056Z 30016KT 10SM CLR 23/02 A2984 RMK A02 SLP106 T02280022 \$

TAF

TAF KSFO 082337Z 0900/1006 29015G25KT P6SM SKC FM090300 33013KT P6SM SKC FM090800 34007KT P6SM SKC WS020/03025KT F

Frequencies

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.05		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.05		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.07		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.87		0 m	136 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m

KPDX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 3

Elevation: 31 ft / 9 m
Location: 45.588700 -122.598000
Magnetic Var: 14.454 E

METAR

KPDX 090053Z 33009G19KT 10SM FEW040 FEW250 21/04 A3028 RMK A02 SLP255 T02060039 \$

TAF

TAF KPDX 082320Z 0900/0924 32012G20KT P6SM SKC FM090600 34005KT P6SM SKC

Frequencies

REC - 128.35 MHz - D-ATIS	COM - 122.95 MHz - PORTLAND UNICOM
GND - 121.90 MHz - PORTLAND GROUND	GND - 132.27 MHz - PORTLAND GROUND
TWR - 118.70 MHz - PORTLAND TOWER	TWR - 123.77 MHz - PORTLAND TOWER
CLD - 120.12 MHz - PORTLAND CLEARANCE DELIVERY	DEP - 118.10 MHz - PORTLAND DEPARTURE
DEP - 124.35 MHz - PORTLAND DEPARTURE	DEP - 127.85 MHz - PORTLAND DEPARTURE
APP - 118.10 MHz - PORTLAND APPROACH	APP - 124.35 MHz - PORTLAND APPROACH
APP - 126.90 MHz - PORTLAND APPROACH	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	150 ft	9,810 ft	119.09	ASPHALT	1,296 ft	397 ft
	46 m	2,990 m	104.64		395 m	121 m
28R	150 ft	9,810 ft	299.12	ASPHALT	538 ft	400 ft
	46 m	2,990 m	284.67		164 m	122 m
10R	150 ft	10,981 ft	119.08	CONCRETE	0 ft	397 ft
	46 m	3,347 m	104.62		0 m	121 m
28L	150 ft	10,981 ft	299.10	CONCRETE	0 ft	400 ft
	46 m	3,347 m	284.65		0 m	122 m
03	150 ft	5,994 ft	44.92	ASPHALT	0 ft	0 ft
	46 m	1,827 m	30.47		0 m	0 m
21	150 ft	5,994 ft	224.94	ASPHALT	0 ft	0 ft
	46 m	1,827 m	210.48		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
10L	DME	IVDG	111.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
10R	DME	IPDX	110.50 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
21	DME	IGPO	108.90 MHz	18 nm	-	-	33 ft
				33 km	-		33 m
28L	DME	IJMJ	110.50 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
28R	DME	IIAP	111.30 MHz	18 nm	-	-	45 ft
				33 km	-		45 m
10L	LOC-ILS	IVDG	111.30 MHz	18 nm	119.12	-	30 ft
				33 km	104.67		30 m
10R	LOC-ILS	IPDX	110.50 MHz	18 nm	119.09	-	30 ft
				33 km	104.64		30 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	IJMJ	110.50 MHz	18 nm	299.09	-	30 ft
				33 km	284.64		30 m
28R	LOC-ILS	IIAP	111.30 MHz	18 nm	299.11	-	30 ft
				33 km	284.66		30 m
21	LOC-LOC	IGPO	108.90 MHz	18 nm	224.93	-	30 ft
				33 km	210.48		30 m
10L	GS	IVDG	111.30 MHz	10 nm	119.11	3.00	30 ft
				19 km	104.66		30 m
10R	GS	IPDX	110.50 MHz	10 nm	119.09	3.00	30 ft
				19 km	104.64		30 m
28L	GS	IJMJ	110.50 MHz	10 nm	299.09	3.00	30 ft
				19 km	284.64		30 m
28R	GS	IIAP	111.30 MHz	10 nm	299.11	3.00	30 ft
				19 km	284.66		30 m