


2024/05/07 0955Z

KABQ CARTY **V12** ZUN **J6** DRK **J231** HIPPI **J10** TNP **V264** YUCCA KLAX

588.67 nm / 1090.22 km

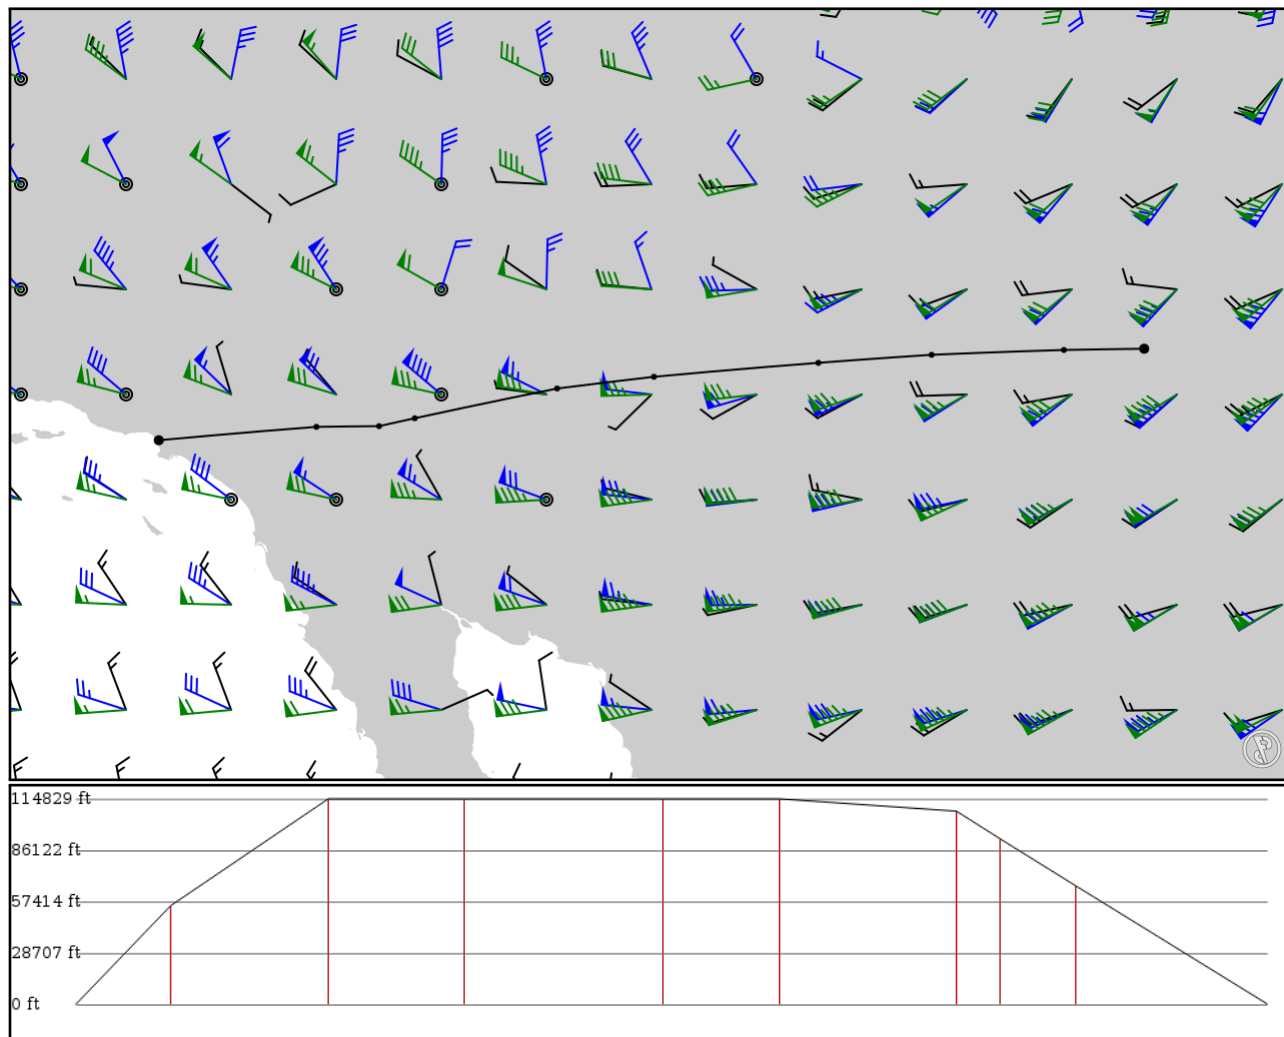

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KABQ APT	-	35.03820 -106.61000	0 ft 0 m	-	Albuquerque
CARTY FIX	-	35.02350 -107.57200	16,800 ft 5,121 m	47	-
ZUN VOR	V12 AWY-LO	34.96580 -109.15500	35,000 ft 10,668 m	77	ZUNI
PYRIT FIX	J6 AWY-HI	34.86960 -110.51100	35,000 ft 10,668 m	67	-
DRK VOR	J6 AWY-HI	34.70260 -112.48000	35,000 ft 10,668 m	97	DRAKE (PRESCOTT)
HIPPI FIX	J231 AWY-HI	34.56230 -113.63900	35,000 ft 10,668 m	57	-
CADEZ FIX	J10 AWY-HI	34.20660 -115.34300	32,900 ft 10,028 m	87	-
TNP VOR	J10 AWY-HI	34.11220 -115.77000	28,200 ft 8,595 m	21	TWENTYNINE PALMS
YUCCA FIX	V264 AWY-LO	34.10350 -116.52100	20,200 ft 6,157 m	37	-
KLAX APT	-	33.94320 -118.40800	0 ft 0 m	94	Los Angeles Intl

KABQ

Region: UNITED STATES

Timezone: AMERICA/DENVER

Runways: 3

Elevation: 5,354 ft / 1,632 m

Location: 35.038200 -106.610000

Magnetic Var: 7.893 E

METAR

KABQ 070852Z 14005KT 10SM CLR 07/M12 A2996 RMK A02 SLP094 T00721117 50002

TAF

TAF KABQ 070520Z 0706/0806 27007KT P6SM SKC FM071700 25015G25KT P6SM SKC FM072100 26027G38KT P6SM SKC FM080300 28015G25KT P6SM SKC

Frequencies

REC - 118.00 MHz - ATIS

CLD - 119.20 MHz - CLNC DEL

TWR - 123.77 MHz -

APP - 123.90 MHz - APP/DEP

APP - 127.40 MHz - APP/DEP

COM - 122.95 MHz - UNICOM

GND - 121.90 MHz -

TWR - 120.30 MHz -

APP - 124.40 MHz - APP/DEP

APP - 134.80 MHz - APP/DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08	150 ft	13,762 ft	90.43	CONCRETE	1,001 ft	551 ft
	46 m	4,195 m	82.53		305 m	168 m
26	150 ft	13,762 ft	270.45	CONCRETE	0 ft	1,001 ft
	46 m	4,195 m	262.56		0 m	305 m
03	150 ft	10,002 ft	44.66	CONCRETE	0 ft	400 ft
	46 m	3,049 m	36.76		0 m	122 m
21	150 ft	10,002 ft	224.67	CONCRETE	0 ft	0 ft
	46 m	3,049 m	216.78		0 m	0 m
12	150 ft	6,024 ft	128.99	CONCRETE	0 ft	0 ft
	46 m	1,836 m	121.10		0 m	0 m
30	150 ft	6,024 ft	309.00	CONCRETE	0 ft	0 ft
	46 m	1,836 m	301.11		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08	DME	ISPT	111.90 MHz	18 nm	-	-	5,374 ft
				33 km	-		5,374 m
03	LOC-ILS	IBZY	111.50 MHz	18 nm	44.67	-	5,354 ft
				33 km	36.78		5,354 m
08	LOC-ILS	ISPT	111.90 MHz	18 nm	90.44	-	5,354 ft
				33 km	82.55		5,354 m
03	GS	IBZY	111.50 MHz	10 nm	44.67	3.00	5,354 ft
				19 km	36.78		5,354 m
08	GS	ISPT	111.90 MHz	10 nm	90.44	3.00	5,354 ft
				19 km	82.55		5,354 m

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.442 E

METAR

KLAX 070853Z 00000KT 10SM CLR 13/11 A2995 RMK A02 SLP142 T01330106 58006 \$

TAF

TAF AMD KLAX 070809Z 0708/0812 VRB03KT P6SM SKC FM071800 26010KT P6SM SKC FM080300 VRB03KT P6SM SKC

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.51		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.53		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.50		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.52		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m