

# EDDW

Bremen


# EHGG

Eelde

2024/05/12 1048Z

EDDW SIPSA EHGG

80.04 nm / 148.23 km

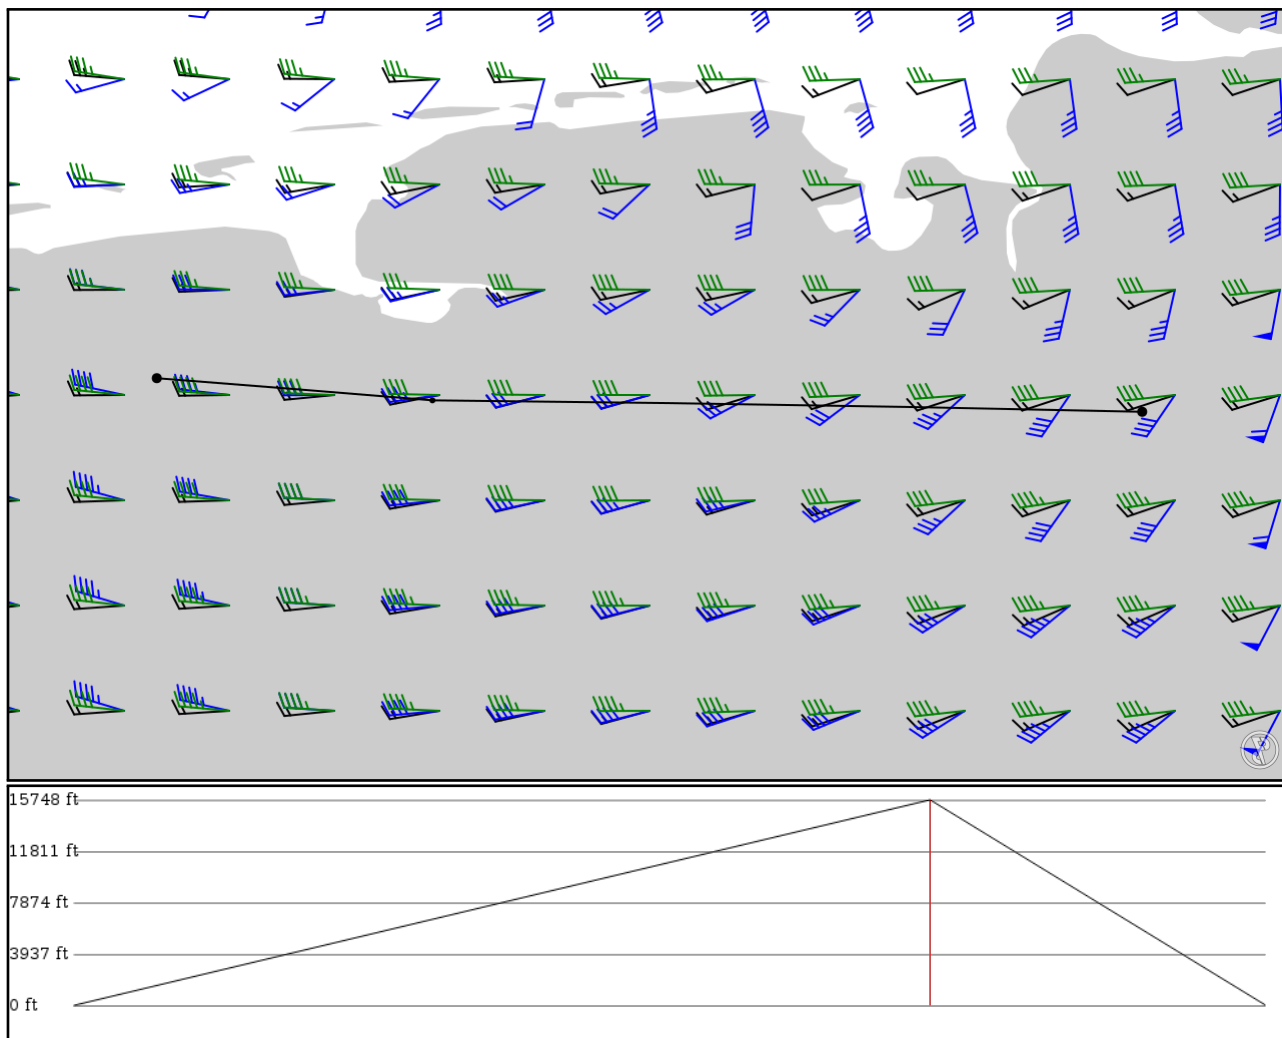

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EDDW	-	53.04571	0 ft	-	Bremen
APT	-	8.78900	0 m		
SIPSA	-	53.07139	4,800 ft	57	-
FIX	-	7.19583	1,463 m		
EHGG	-	53.12103	0 ft	22	Eelde
APT	-	6.57707	0 m		

## EDDW

Region: GERMANY - CIVIL  
Timezone: EUROPE/BERLIN  
Runways: 2

Elevation: 14 ft / 4 m  
Location: 53.045700 8.789000  
Magnetic Var: 3.303 E

## METAR

EDDW 121020Z AUTO 11012KT 060V140 9999 SCT038 19/10 Q1021 NOSIG

## TAF

TAF EDDW 120500Z 1206/1306 08005KT CAVOK PROB30 TEMPO 1206/1207 BKN009 BECMG 1207/1209 10012KT BECMG 1218/1220 10012KT

## Frequencies

GND - 121.75 MHz -  
TWR - 118.50 MHz -  
APP - 124.80 MHz - RADAR

TWR - 125.10 MHz - INFO  
TWR - 134.82 MHz -  
APP - 136.27 MHz - RADAR

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	75 ft	2,299 ft	51.50	ASPHALT	0 ft	0 ft
	23 m	701 m	48.20		0 m	0 m
23	75 ft	2,299 ft	231.51	ASPHALT	0 ft	0 ft
	23 m	701 m	228.20		0 m	0 m
09	148 ft	8,616 ft	87.78	ASPHALT	945 ft	0 ft
	45 m	2,626 m	84.48		288 m	0 m
27	148 ft	8,616 ft	267.82	ASPHALT	984 ft	0 ft
	45 m	2,626 m	264.51		300 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
09	LOC-ILS	IBRE	110.30 MHz	18 nm	87.80	-	14 ft
				33 km	84.50		14 m
27	LOC-ILS	IBRW	110.90 MHz	18 nm	267.80	-	14 ft
				33 km	264.50		14 m
09	GS	IBRE	110.30 MHz	10 nm	87.80	3.00	14 ft
				19 km	84.50		14 m
27	GS	IBRW	110.90 MHz	10 nm	267.80	3.00	14 ft
				19 km	264.50		14 m

## EHGG

Region: NETHERLANDS  
Timezone: EUROPE/AMSTERDAM  
Runways: 1

Elevation: 17 ft / 5 m  
Location: 53.118000 6.575580  
Magnetic Var: 2.606 E

## METAR

EHGG 121025Z AUTO 08011KT 050V120 9999 NCD 20/11 Q1019 NOSIG

## TAF

TAF EHGG 120420Z 1206/1312 09008KT CAVOK BECMG 1221/1224 12010KT BECMG 1309/1312 15010KT

## Frequencies

REC - 133.55 MHz - ATIS  
TWR - 118.70 MHz -

CLD - 121.70 MHz - DEL  
APP - 120.30 MHz -

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
05	148 ft	8,185 ft	51.78	ASPHALT	0 ft	98 ft
	45 m	2,495 m	49.18		0 m	30 m
23	148 ft	8,185 ft	231.81	ASPHALT	0 ft	98 ft
	45 m	2,495 m	229.20		0 m	30 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
23	LOC-ILS	GRO	109.90 MHz	18 nm	231.80	-	17 ft
				33 km	229.19		17 m
23	GS	GRO	109.90 MHz	10 nm	231.80	3.00	17 ft
				19 km	229.19		17 m