


2024/05/08 0915Z

RKSI CUN **G585** JEC **V53** YUBAR RJBB

476.25 nm / 882.01 km

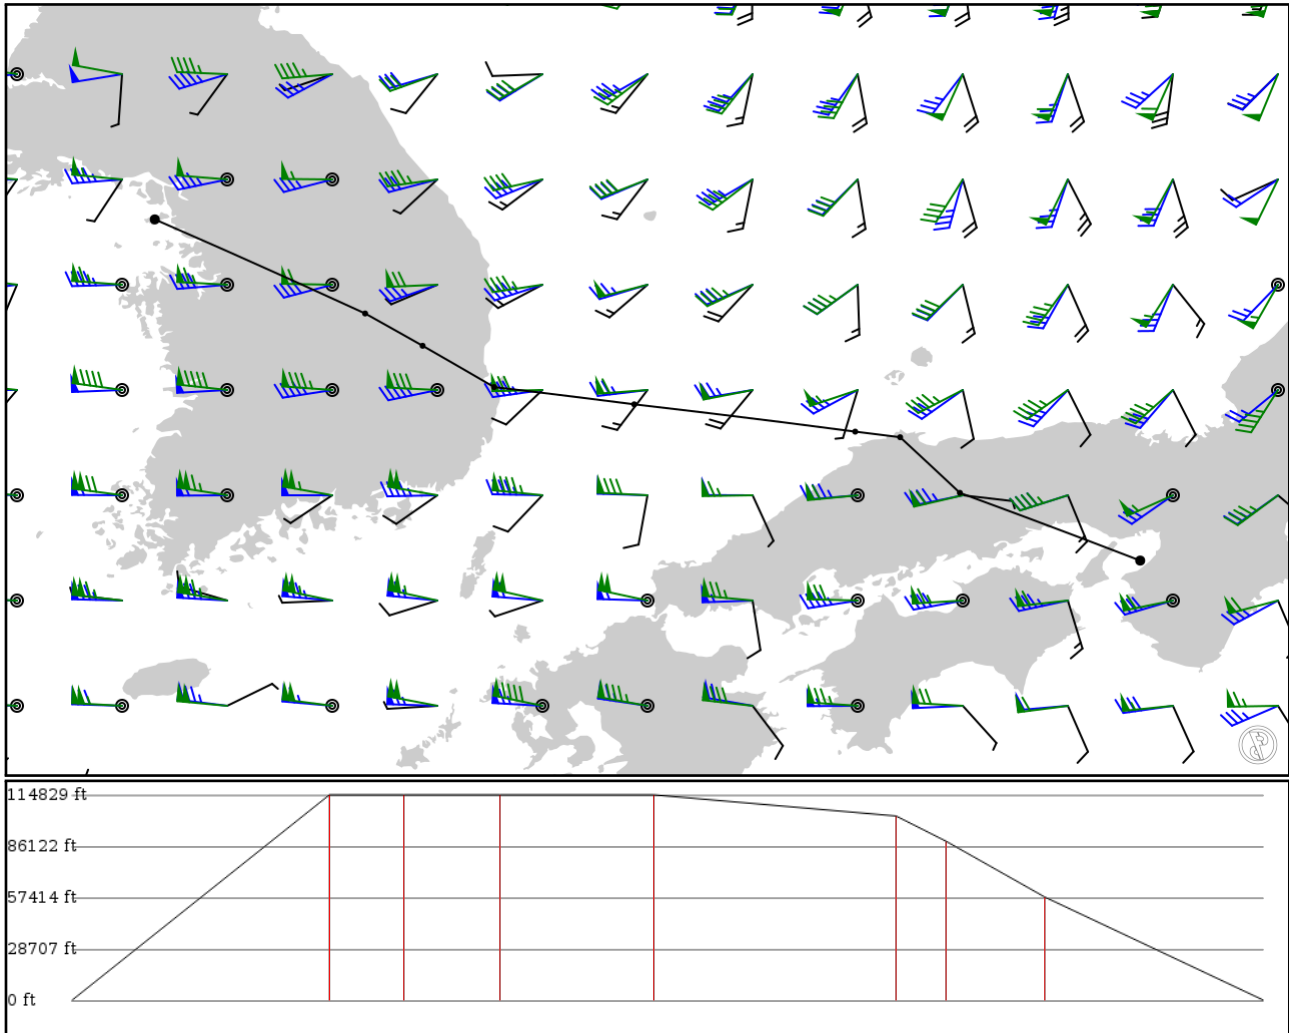

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: no
- Use PACOTS: no
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RKSI APT	-	37.46908 126.45051	0 ft 0 m	-	Incheon Intl
CUN VOR	-	36.63203 128.32539	35,000 ft 10,668 m	102	YECHEON VOR-DME
PAROT FIX	G585 AWY-HI	36.34472 128.83778	35,000 ft 10,668 m	30	-
KPO VOR	G585 AWY-HI	35.97747 129.47433	35,000 ft 10,668 m	37	POHANG VORTAC
SAPRA FIX	G585 AWY-HI	35.82389 130.72361	35,000 ft 10,668 m	61	-
STAGE FIX	G585 AWY-HI	35.58102 132.69324	31,400 ft 9,571 m	97	-
JEC VOR	G585 AWY-HI	35.53112 133.09391	27,100 ft 8,260 m	19	MIHO VORTAC
YUBAR FIX	V53 AWY-HI	35.03625 133.62624	17,600 ft 5,364 m	39	-
RJBB APT	-	34.43362 135.23360	0 ft 0 m	87	KANSAI INTL

RKSI

Region: SOUTH KOREA
Timezone: UNKNOWN
Runways: 3

Elevation: 22 ft / 7 m
Location: 37.465400 126.443000
Magnetic Var: 8.782 W

METAR

RKSI 080900Z 27010KT CAVOK 16/05 Q1018 NOSIG

TAF

TAF RKSI 080500Z 0806/0912 29008KT CAVOK TN10/0821Z TX19/0905Z BECMG 0821/0823 22007KT BECMG 0904/0906 23015G25K

Frequencies

REC - 128.40 MHz - INCHEON ATIS
TWR - 118.20 MHz - INCHEON TOWER
DEP - 121.40 MHz - SEOUL DEPARTURE

GND - 121.75 MHz - INCHEON GROUND
APP - 119.75 MHz - SEOUL APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16	197 ft	13,131 ft	144.75	ASPHALT	0 ft	394 ft
	60 m	4,002 m	153.54		0 m	120 m
34	197 ft	13,131 ft	324.77	ASPHALT	0 ft	394 ft
	60 m	4,002 m	333.55		0 m	120 m
15R	197 ft	12,311 ft	144.78	ASPHALT	0 ft	397 ft
	60 m	3,752 m	153.56		0 m	121 m
33L	197 ft	12,311 ft	324.79	ASPHALT	0 ft	394 ft
	60 m	3,752 m	333.57		0 m	120 m
15L	197 ft	12,312 ft	144.77	ASPHALT	0 ft	397 ft
	60 m	3,753 m	153.56		0 m	121 m
33R	197 ft	12,312 ft	324.79	ASPHALT	0 ft	394 ft
	60 m	3,753 m	333.57		0 m	120 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
15L	DME	ISLL	111.90 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
15R	DME	ISRR	109.10 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
33L	DME	INLL	109.30 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
33R	DME	INRR	108.90 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
15L	LOC-ILS	ISLL	111.90 MHz	18 nm	144.79	-	22 ft
				33 km	153.57		22 m
15R	LOC-ILS	ISRR	109.10 MHz	18 nm	144.79	-	22 ft
				33 km	153.57		22 m
16	LOC-ILS	IRKS	110.35 MHz	18 nm	144.77	-	22 ft
				33 km	153.55		22 m
33L	LOC-ILS	INLL	109.30 MHz	18 nm	324.79	-	22 ft
				33 km	333.57		22 m
33R	LOC-ILS	INRR	108.90 MHz	18 nm	324.79	-	22 ft
				33 km	333.57		22 m
34	LOC-ILS	IRKN	108.10 MHz	18 nm	324.77	-	22 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	333.55		22 m
15L	GS	ISLL	111.90 MHz	10 nm	144.79	3.00	22 ft
				19 km	153.57		22 m
15R	GS	ISRR	109.10 MHz	10 nm	144.79	3.00	22 ft
				19 km	153.57		22 m
16	GS	IRKS	110.35 MHz	10 nm	144.77	3.00	22 ft
				19 km	153.55		22 m
33L	GS	INLL	109.30 MHz	10 nm	324.79	3.00	22 ft
				19 km	333.57		22 m
33R	GS	INRR	108.90 MHz	10 nm	324.79	3.00	23 ft
				19 km	333.57		23 m
34	GS	IRKN	108.10 MHz	10 nm	324.77	3.00	22 ft
				19 km	333.55		22 m

RJBB

Region: JAPAN
Timezone: ASIA/TOKYO
Runways: 2

Elevation: 17 ft / 5 m
Location: 34.433600 135.234000
Magnetic Var: 8.019 W

METAR

RJBB 080900Z 35017KT 9999 FEW025 SCT040 BKN070 16/11 Q1012 NOSIG

TAF

TAF TAF RJBB 080505Z 0806/0912 01017KT 9999 FEW025 SCT040

Frequencies

APP - 120.25 MHz - KANSAI APPROACH	APP - 120.45 MHz - KANSAI APPROACH
APP - 125.50 MHz - KANSAI APPROACH	APP - 124.70 MHz - KANSAI APPROACH
APP - 121.15 MHz - KANSAI APPROACH	APP - 120.85 MHz - KANSAI APPROACH
APP - 125.00 MHz - KANSAI APPROACH	APP - 124.80 MHz - KANSAI APPROACH
APP - 121.20 MHz - KANSAI APPROACH	APP - 120.40 MHz - KANSAI APPROACH
DEP - 119.20 MHz - KANSAI DEPARTURE	DEP - 120.65 MHz - KANSAI DEPARTURE
DEP - 119.50 MHz - KANSAI DEPARTURE	DEP - 119.75 MHz - KANSAI DEPARTURE
TWR - 118.20 MHz - KANSAI TOWER	TWR - 118.05 MHz - KANSAI TOWER
TWR - 126.20 MHz - KANSAI TOWER	GND - 121.60 MHz - KANSAI GROUND
GND - 121.65 MHz - KANSAI GROUND	CLD - 121.90 MHz - KANSAI DELIVERY
REC - 127.85 MHz - ATIS	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	13,135 ft	50.85	ASPHALT	0 ft	187 ft
	60 m	4,004 m	58.87		0 m	57 m
24R	197 ft	13,135 ft	230.87	ASPHALT	0 ft	184 ft
	60 m	4,004 m	238.89		0 m	56 m
06R	197 ft	11,493 ft	50.87	ASPHALT	0 ft	187 ft
	60 m	3,503 m	58.88		0 m	57 m
24L	197 ft	11,493 ft	230.88	ASPHALT	0 ft	180 ft
	60 m	3,503 m	238.90		0 m	55 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	DME	IKD	108.10 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
24L	DME	IKN	110.70 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
06L	LOC-ILS	IKJ	108.70 MHz	18 nm	50.86	-	17 ft
				33 km	58.88		17 m
06R	LOC-ILS	IKD	108.10 MHz	18 nm	50.88	-	17 ft
				33 km	58.90		17 m
24L	LOC-ILS	IKN	110.70 MHz	18 nm	230.88	-	17 ft
				33 km	238.90		17 m
24R	LOC-ILS	IKW	108.50 MHz	18 nm	230.86	-	17 ft
				33 km	238.88		17 m
06L	GS	IKJ	108.70 MHz	10 nm	50.86	3.00	17 ft
				19 km	58.88		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	GS	IKD	108.10 MHz	10 nm	50.88	3.00	17 ft
				19 km	58.90		17 m
24L	GS	IKN	110.70 MHz	10 nm	230.88	3.00	17 ft
				19 km	238.90		17 m
24R	GS	IKW	108.50 MHz	10 nm	230.86	3.00	17 ft
				19 km	238.88		17 m