

OLBA

Beyrouth Rafic Hariri Intl


LGMK

Mikonos

2024/05/09 1254Z

OLBA REXAL **UR19** LCA **UM601** RDS **UL995** USINI LGMK

543.54 nm / 1006.63 km

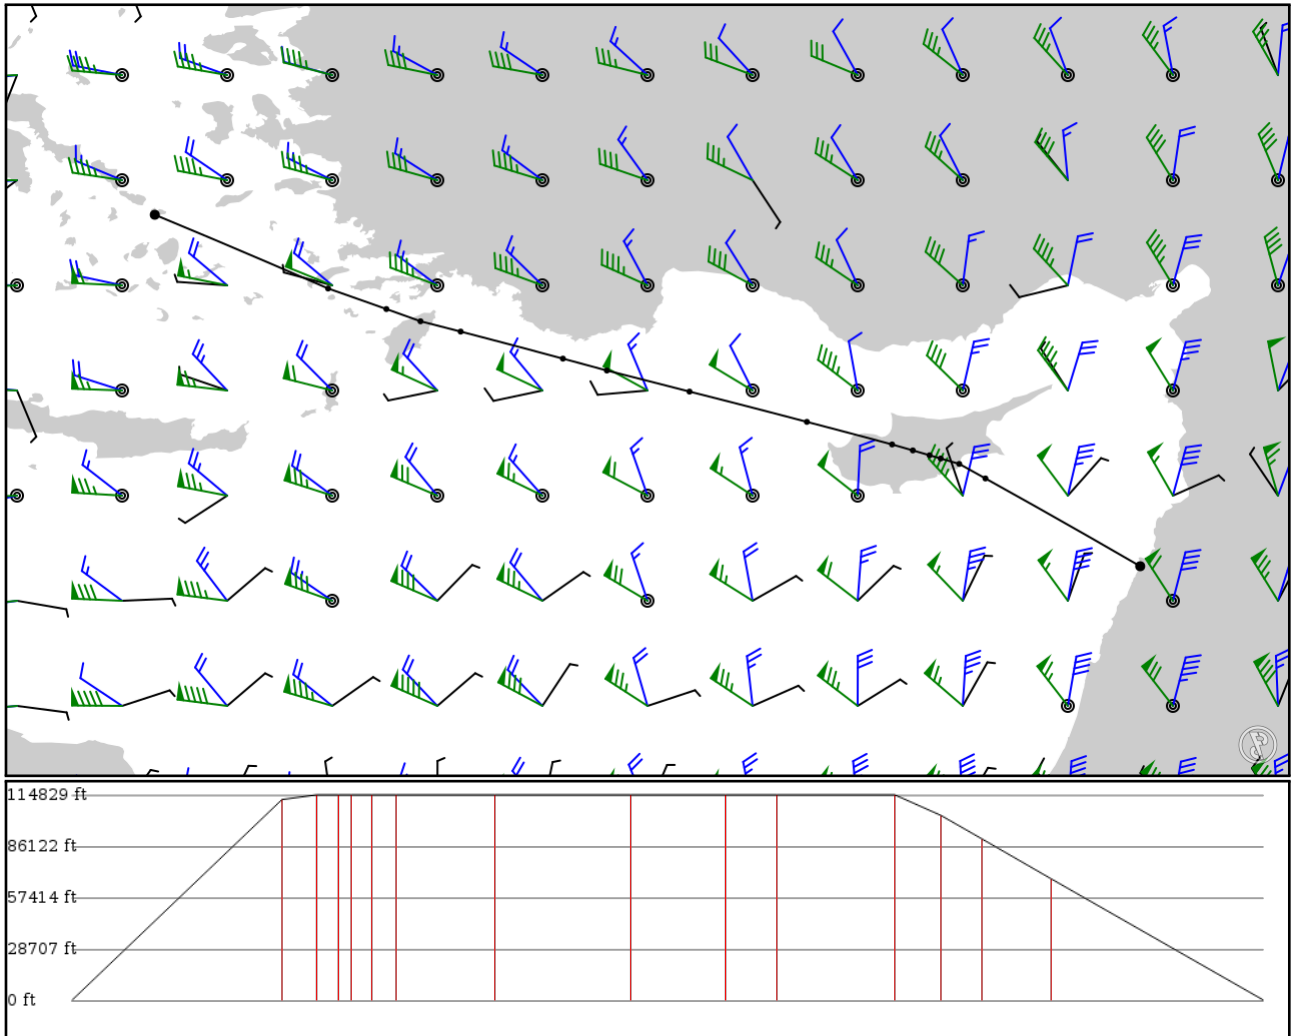

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
OLBA	-	33.82050	0 ft	-	Beyrouth Rafic Hariri Intl
APT	-	35.48770	0 m	-	
REXAL	-	34.72330	34,200 ft	95	-
FIX	-	33.89500	10,424 m	-	
LCA	UR19	34.87290	35,000 ft	16	LARNACA
VOR	AWY-HI	33.62560	10,668 m	-	
OTESA	UM601	34.92860	35,000 ft	9	-
FIX	AWY-HI	33.43470	10,668 m	-	
ADLAS	UM601	34.96190	35,000 ft	5	-
FIX	AWY-HI	33.32000	10,668 m	-	
DAROS	UM601	35.01170	35,000 ft	8	-
FIX	AWY-HI	33.14830	10,668 m	-	
BONEK	UM601	35.07310	35,000 ft	11	-
FIX	AWY-HI	32.93470	10,668 m	-	
VADUS	UM601	35.30530	35,000 ft	45	-
FIX	AWY-HI	32.05810	10,668 m	-	
DASNI	UM601	35.61670	35,000 ft	61	-
FIX	AWY-HI	30.85000	10,668 m	-	
EVENO	UM601	35.83330	35,000 ft	43	-
FIX	AWY-HI	30.00000	10,668 m	-	
EXELA	UM601	35.95560	35,000 ft	23	-
FIX	AWY-HI	29.54780	10,668 m	-	
LAKAD	UM601	36.23390	35,000 ft	53	-
FIX	AWY-HI	28.49560	10,668 m	-	
RDS	UM601	36.33990	31,500 ft	21	RODOS
VOR	AWY-HI	28.08210	9,601 m	-	
ASIMI	UL995	36.46560	27,500 ft	18	-
FIX	AWY-HI	27.73110	8,382 m	-	
USINI	UL995	36.67690	20,700 ft	31	-
FIX	AWY-HI	27.13170	6,309 m	-	
LGMK	-	37.43540	0 ft	96	Mikonos
APT	-	25.34810	0 m	-	

OLBA

Region: LEBANON
Timezone: UNKNOWN
Runways: 3

Elevation: 84 ft / 26 m
Location: 33.820500 35.487600
Magnetic Var: 5.442 E

METAR

OLBA 091200Z 36010KT 8000 NSC 31/01 Q1011 NOSIG

TAF

TAF OLBA 090400Z 0906/1012 36010KT 8000 /// NSC TEMPO 0906/0918 36010G20KT PROB30 TEMPO 0908/1012 5000 HZ BECMG 09

Frequencies

REC - 120.60 MHz - ATIS
GND - 121.90 MHz - BEIRUT HARIRI GROUND
APP - 120.30 MHz - BEIRUT APPROACH
TWR - 118.90 MHz - BEIRUT HARIRI TOWER
APP - 119.30 MHz - BEIRUT APPROACH

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
03	148 ft	12,484 ft	32.77	CONCRETE	1,821 ft	390 ft
	45 m	3,805 m	27.32		555 m	119 m
21	148 ft	12,484 ft	212.78	CONCRETE	3,268 ft	390 ft
	45 m	3,805 m	207.34		996 m	119 m
16	148 ft	11,168 ft	166.99	CONCRETE	591 ft	394 ft
	45 m	3,404 m	161.54		180 m	120 m
34	148 ft	11,168 ft	346.99	CONCRETE	0 ft	341 ft
	45 m	3,404 m	341.55		0 m	104 m
17	148 ft	10,623 ft	176.90	ASPHALT	0 ft	154 ft
	45 m	3,238 m	171.46		0 m	47 m
35	148 ft	10,623 ft	356.90	ASPHALT	2,697 ft	0 ft
	45 m	3,238 m	351.46		822 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
03	DME	IKK	110.70 MHz	18 nm	-	-	43 ft
				33 km	-		43 m
16	DME	IBB	110.10 MHz	18 nm	-	-	10 ft
				33 km	-		10 m
03	LOC-ILS	IKK	110.70 MHz	18 nm	32.78	-	84 ft
				33 km	27.34		84 m
16	LOC-ILS	IBB	110.10 MHz	18 nm	166.99	-	84 ft
				33 km	161.55		84 m
17	LOC-ILS	BIL	109.50 MHz	18 nm	176.90	-	84 ft
				33 km	171.46		84 m
03	GS	IKK	110.70 MHz	10 nm	32.78	3.00	84 ft
				19 km	27.34		84 m
16	GS	IBB	110.10 MHz	10 nm	166.99	3.00	84 ft
				19 km	161.55		84 m
17	GS	BIL	109.50 MHz	10 nm	176.90	3.00	84 ft
				19 km	171.46		84 m