


**RJFF**  
Fukuoka

**RJBB**  
Kansai International

2024/05/13 1357Z

RJFF HEIGU **V40** MALTA RJBB

246.19 nm / 455.95 km

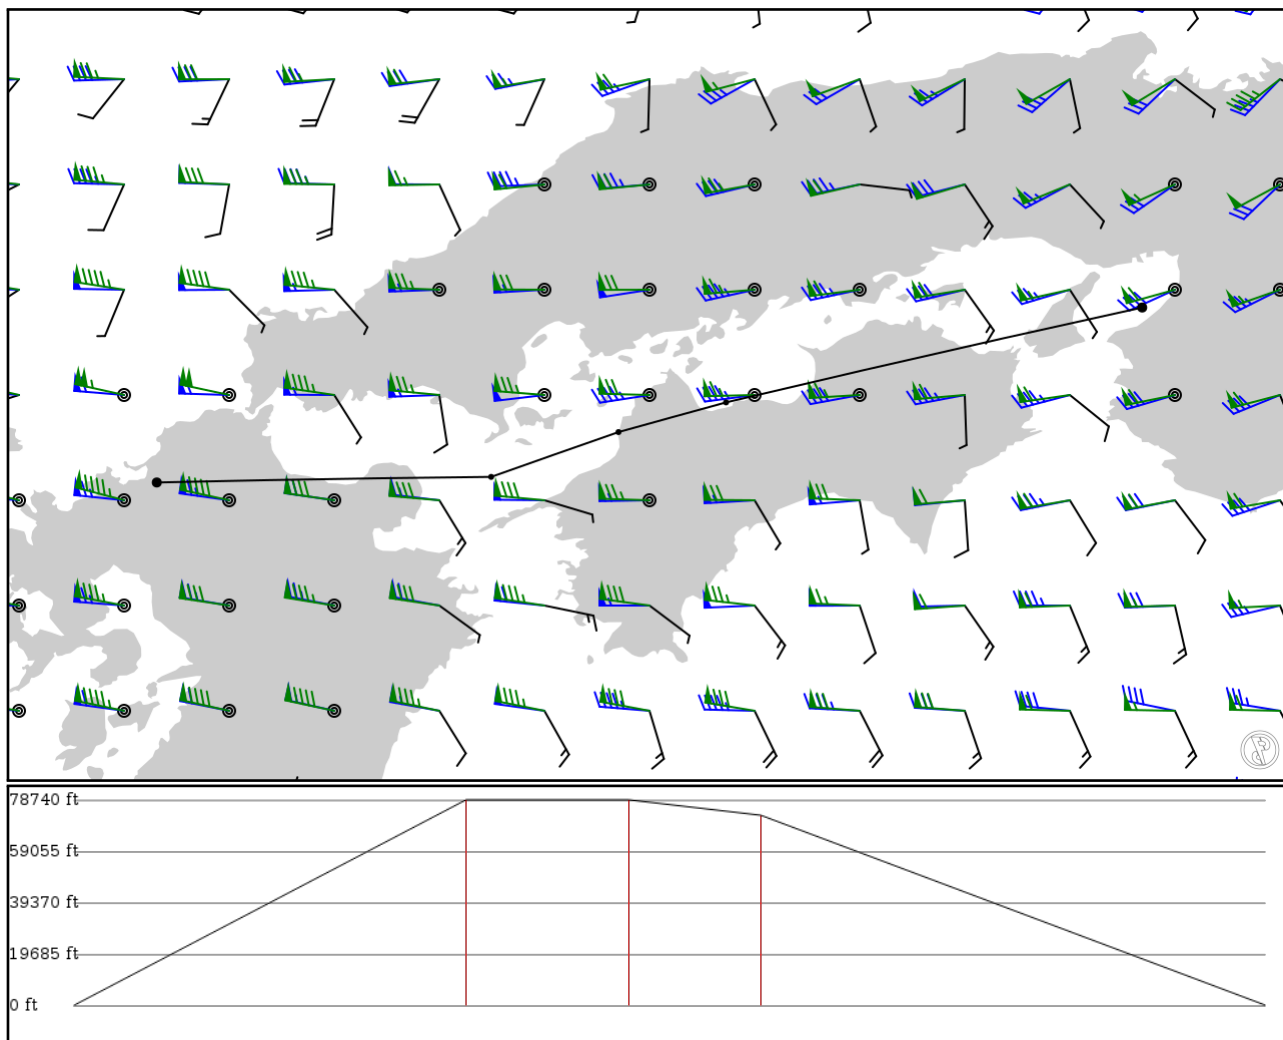

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 24000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
RJFF APT	-	33.58590 130.45100	0 ft 0 m	-	Fukuoka
HEIGU FIX	-	33.61300 132.07400	24,000 ft 7,315 m	81	-
MYE VOR	V40 AWY-HI	33.83010 132.69200	24,000 ft 7,315 m	33	MATSUYAMA
MALTA FIX	V40 AWY-HI	33.97390 133.21400	22,200 ft 6,767 m	27	-
RJBB APT	-	34.43360 135.23400	0 ft 0 m	104	Kansai International

## RJFF

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 1

Elevation: 30 ft / 9 m  
Location: 33.585900 130.451000  
Magnetic Var: 7.932 W

## METAR

RJFF 131330Z VRB01KT CAVOK 14/09 Q1015 NOSIG

## TAF

TAF RJFF 131107Z 1312/1418 16004KT 9999 FEW030 BECMG 1400/1403 32010KT BECMG 1409/1412 16005KT

## Frequencies

REC - 127.20 MHz - FUKUOKA ATIS	CLD - 121.92 MHz - FUKUOKA DELIVERY
GND - 121.70 MHz - FUKUOKA GROUND	TWR - 118.40 MHz - FUKUOKA TOWER
TWR - 126.20 MHz - FUKUOKA TOWER	DEP - 119.70 MHz - FUKUOKA DEPARTURE
APP - 119.65 MHz - FUKUOKA APPROACH	APP - 121.12 MHz - FUKUOKA APPROACH
APP - 127.90 MHz - FUKUOKA APPROACH	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16	197 ft	9,213 ft	150.35	ASPHALT	0 ft	197 ft
	60 m	2,808 m	158.28		0 m	60 m
34	197 ft	9,213 ft	330.35	ASPHALT	0 ft	200 ft
	60 m	2,808 m	338.29		0 m	61 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34	DME	IFF	108.90 MHz	18 nm	-	-	46 ft
				33 km	-		46 m
16	LOC-ILS	IFO	111.70 MHz	18 nm	150.35	-	30 ft
				33 km	158.28		30 m
34	LOC-ILS	IFF	108.90 MHz	18 nm	330.35	-	30 ft
				33 km	338.28		30 m
16	GS	IFO	111.70 MHz	10 nm	150.35	3.00	30 ft
				19 km	158.28		30 m
34	GS	IFF	108.90 MHz	10 nm	330.35	3.00	30 ft
				19 km	338.28		30 m

## RJBB

Region: JAPAN  
Timezone: ASIA/TOKYO  
Runways: 2

Elevation: 17 ft / 5 m  
Location: 34.433600 135.234000  
Magnetic Var: 8.020 W

## METAR

RJBB 131330Z 03010KT 9999 FEW020 BKN/// 15/09 Q1015 NOSIG

## TAF

TAF TAF RJBB 131105Z 1312/1418 04010KT 9999 FEW025 BECMG 1400/1403 23008KT BECMG 1415/1418 12004KT

## Frequencies

APP - 120.25 MHz - KANSAI APPROACH	APP - 120.45 MHz - KANSAI APPROACH
APP - 125.50 MHz - KANSAI APPROACH	APP - 124.70 MHz - KANSAI APPROACH
APP - 121.15 MHz - KANSAI APPROACH	APP - 120.85 MHz - KANSAI APPROACH
APP - 125.00 MHz - KANSAI APPROACH	APP - 124.80 MHz - KANSAI APPROACH
APP - 121.20 MHz - KANSAI APPROACH	APP - 120.40 MHz - KANSAI APPROACH
DEP - 119.20 MHz - KANSAI DEPARTURE	DEP - 120.65 MHz - KANSAI DEPARTURE
DEP - 119.50 MHz - KANSAI DEPARTURE	DEP - 119.75 MHz - KANSAI DEPARTURE
TWR - 118.20 MHz - KANSAI TOWER	TWR - 118.05 MHz - KANSAI TOWER
TWR - 126.20 MHz - KANSAI TOWER	GND - 121.60 MHz - KANSAI GROUND
GND - 121.65 MHz - KANSAI GROUND	CLD - 121.90 MHz - KANSAI DELIVERY
REC - 127.85 MHz - ATIS	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	13,135 ft	50.85	ASPHALT	0 ft	187 ft
	60 m	4,004 m	58.87		0 m	57 m
24R	197 ft	13,135 ft	230.87	ASPHALT	0 ft	184 ft
	60 m	4,004 m	238.89		0 m	56 m
06R	197 ft	11,493 ft	50.87	ASPHALT	0 ft	187 ft
	60 m	3,503 m	58.89		0 m	57 m
24L	197 ft	11,493 ft	230.88	ASPHALT	0 ft	180 ft
	60 m	3,503 m	238.90		0 m	55 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	DME	IKD	108.10 MHz	18 nm	-	-	34 ft
				33 km	-		34 m
24L	DME	IKN	110.70 MHz	18 nm	-	-	36 ft
				33 km	-		36 m
06L	LOC-ILS	IKJ	108.70 MHz	18 nm	50.86	-	17 ft
				33 km	58.88		17 m
06R	LOC-ILS	IKD	108.10 MHz	18 nm	50.88	-	17 ft
				33 km	58.90		17 m
24L	LOC-ILS	IKN	110.70 MHz	18 nm	230.88	-	17 ft
				33 km	238.90		17 m
24R	LOC-ILS	IKW	108.50 MHz	18 nm	230.86	-	17 ft
				33 km	238.88		17 m
06L	GS	IKJ	108.70 MHz	10 nm	50.86	3.00	17 ft
				19 km	58.88		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06R	GS	IKD	108.10 MHz	10 nm	50.88	3.00	17 ft
				19 km	58.90		17 m
24L	GS	IKN	110.70 MHz	10 nm	230.88	3.00	17 ft
				19 km	238.90		17 m
24R	GS	IKW	108.50 MHz	10 nm	230.86	3.00	17 ft
				19 km	238.88		17 m