

# EIDW

Dublin Intn


# EHAM

Amsterdam Schiphol

2024/05/11 0346Z

EIDW EMLIP **UL975** WAL **M16** DOLAS **L603** ENITO EHAM

406.13 nm / 752.14 km

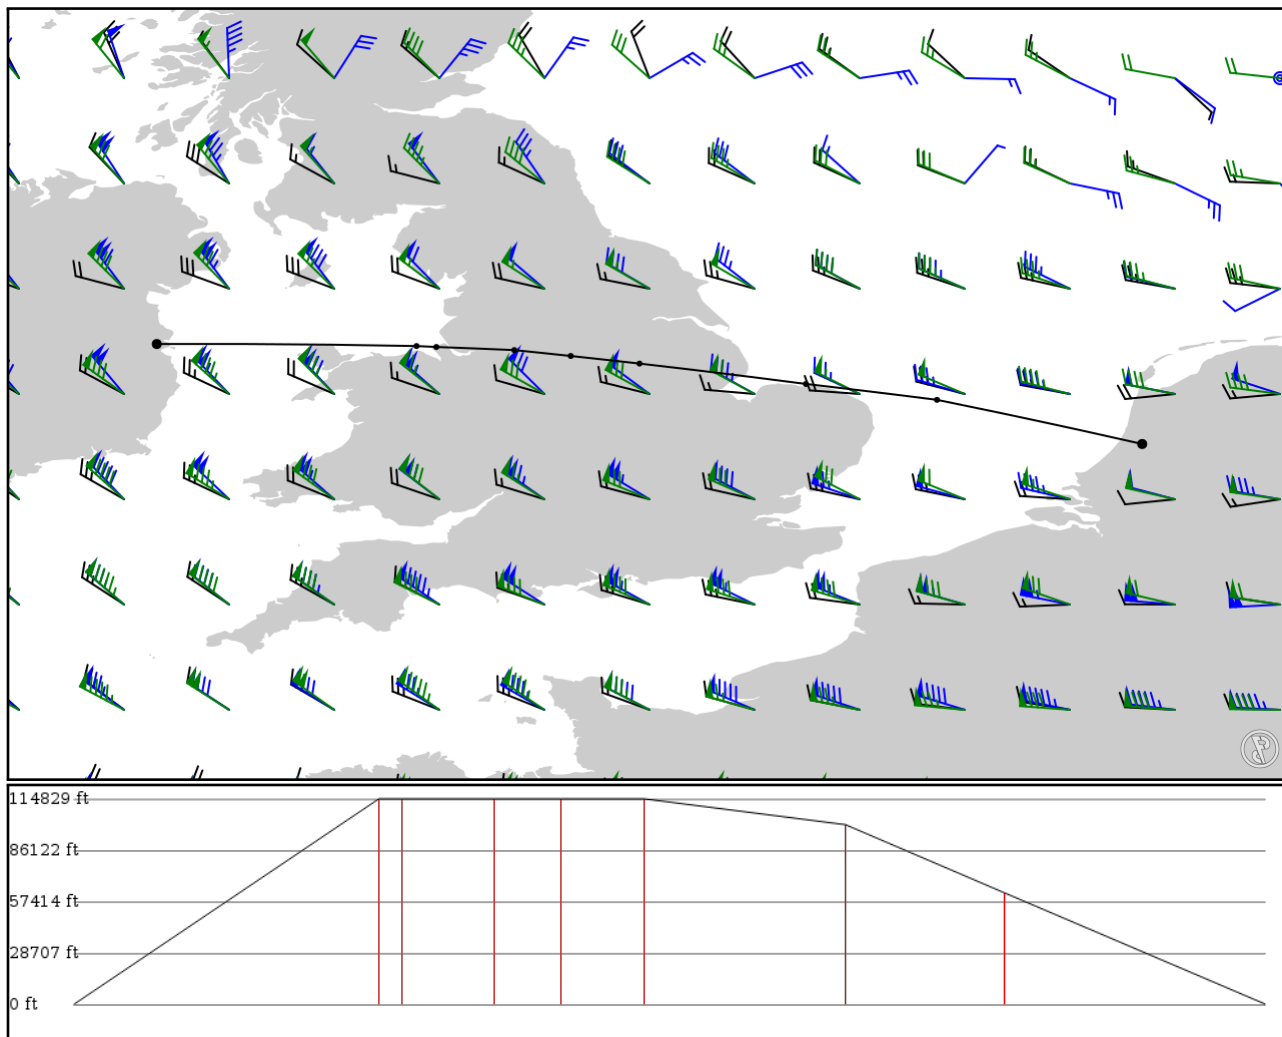

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes



## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
EIDW APT	-	53.42490 -6.26305	0 ft 0 m	-	Dublin Intn
EMLIP FIX	-	53.40220 -3.35667	35,000 ft 10,668 m	104	-
WAL VOR	UL975 AWY-HI	53.39190 -3.13446	35,000 ft 10,668 m	7	WALLASEY
MCT VOR	M16 AWY-HI	53.35700 -2.26229	35,000 ft 10,668 m	31	MANCHESTER
XAPOS FIX	M16 AWY-HI	53.29140 -1.63083	35,000 ft 10,668 m	22	-
NAPEX FIX	M16 AWY-HI	53.20640 -0.86111	35,000 ft 10,668 m	28	-
DOLAS FIX	M16 AWY-HI	52.97860 1.00083	30,600 ft 9,327 m	68	-
ENITO FIX	L603 AWY-HI	52.80140 2.46750	19,000 ft 5,791 m	54	-
EHAM APT	-	52.30810 4.76417	0 ft 0 m	88	Amsterdam Schiphol

## EIDW

Region: IRELAND  
Timezone: EUROPE/DUBLIN  
Runways: 2

Elevation: 240 ft / 73 m  
Location: 53.424900 -6.263080  
Magnetic Var: 1.975 W

## METAR

EIDW 110330Z VRB02KT 5000 BR FEW002 08/07 Q1020 TEMPO 2000

## TAF

TAF EIDW 102300Z 1100/1124 VRB03KT 9999 FEW010 PROB30 1102/1106 3000 BR BECMG 1110/1112 14012KT BECMG 1119/1121 14012KT

## Frequencies

REC - 124.52 MHz - ATIS	TWR - 118.60 MHz - DUBLIN TOWER
GND - 118.75 MHz - DUBLIN GROUND	GND - 121.80 MHz - DUBLIN GROUND
CLD - 121.87 MHz - CLEARANCE DELIVERY	APP - 133.27 MHz - DUBLIN APPROACH
APP - 121.10 MHz - DUBLIN APPROACH	APP - 119.92 MHz - DUBLIN APPROACH
APP - 119.55 MHz - DUBLIN APPROACH	REC - 118.50 MHz - DUBLIN INFORMATION

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10R	148 ft	8,660 ft	95.26	ASPHALT	0 ft	0 ft
	45 m	2,640 m	97.23		0 m	0 m
28L	148 ft	8,660 ft	275.29	ASPHALT	0 ft	0 ft
	45 m	2,640 m	277.26		0 m	0 m
16	190 ft	6,805 ft	156.64	ASPHALT	0 ft	0 ft
	58 m	2,074 m	158.61		0 m	0 m
34	190 ft	6,805 ft	336.65	ASPHALT	0 ft	0 ft
	58 m	2,074 m	338.62		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16	DME	IAC	111.50 MHz	18 nm	-	-	200 ft
				33 km	-		200 m
10R	LOC-ILS	IDE	108.90 MHz	18 nm	95.26	-	242 ft
				33 km	97.24		242 m
16	LOC-ILS	IAC	111.50 MHz	18 nm	156.64	-	242 ft
				33 km	158.62		242 m
28L	LOC-ILS	IDW	111.35 MHz	18 nm	275.26	-	242 ft
				33 km	277.24		242 m
10R	GS	IDE	108.90 MHz	10 nm	95.26	3.00	242 ft
				19 km	97.24		242 m
16	GS	IAC	111.50 MHz	10 nm	156.64	3.00	242 ft
				19 km	158.62		242 m
28L	GS	IDW	111.35 MHz	10 nm	275.26	3.00	242 ft
				19 km	277.24		242 m

## EHAM

Region: NETHERLANDS  
Timezone: EUROPE/AMSTERDAM  
Runways: 6

Elevation: -11 ft / -3 m  
Location: 52.308100 4.764170  
Magnetic Var: 2.043 E

## METAR

EHAM 110325Z 06007KT 9999 FEW007 12/11 Q1023 BECMG BKN007

## TAF

TAF EHAM 102308Z 1100/1206 06008KT CAVOK PROB30 1103/1106 7000 BKN005

## Frequencies

GND - 121.55 MHz - SCHIPHOL GROUND	GND - 121.70 MHz - SCHIPHOL GROUND
GND - 121.80 MHz - SCHIPHOL GROUND	GND - 121.90 MHz - SCHIPHOL GROUND
GND - 121.60 MHz - SCHIPHOL GROUND	TWR - 119.22 MHz - SCHIPHOL TOWER
TWR - 118.10 MHz - SCHIPHOL TOWER	TWR - 118.27 MHz - SCHIPHOL TOWER
TWR - 119.90 MHz - SCHIPHOL TOWER	APP - 118.80 MHz - AMSTERDAM RADAR
APP - 120.55 MHz - AMSTERDAM RADAR	APP - 127.78 MHz - AMSTERDAM RADAR
APP - 119.05 MHz - SCHIPHOL APPROACH	APP - 118.08 MHz - SCHIPHOL APPROACH
APP - 126.68 MHz - SCHIPHOL APPROACH	APP - 118.40 MHz - SCHIPHOL ARRIVAL
APP - 131.15 MHz - SCHIPHOL ARRIVAL	DEP - 121.20 MHz - SCHIPHOL DEPARTURE
REC - 122.20 MHz - SCHIPHOL ATIS	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
09	145 ft	11,319 ft	86.77	ASPHALT	325 ft	0 ft
	44 m	3,450 m	84.73		99 m	0 m
27	145 ft	11,319 ft	266.81	ASPHALT	0 ft	0 ft
	44 m	3,450 m	264.77		0 m	0 m
18L	150 ft	11,150 ft	183.24	ASPHALT	1,886 ft	0 ft
	46 m	3,399 m	181.20		575 m	0 m
36R	150 ft	11,150 ft	3.24	ASPHALT	0 ft	0 ft
	46 m	3,399 m	1.20		0 m	0 m
18C	145 ft	10,813 ft	183.22	ASPHALT	0 ft	0 ft
	44 m	3,296 m	181.17		0 m	0 m
36C	145 ft	10,813 ft	3.22	ASPHALT	1,473 ft	0 ft
	44 m	3,296 m	1.17		449 m	0 m
18R	190 ft	12,467 ft	183.19	ASPHALT	886 ft	0 ft
	58 m	3,800 m	181.15		270 m	0 m
36L	190 ft	12,467 ft	3.19	ASPHALT	0 ft	0 ft
	58 m	3,800 m	1.15		0 m	0 m
06	150 ft	11,288 ft	57.85	ASPHALT	814 ft	0 ft
	46 m	3,441 m	55.81		248 m	0 m
24	150 ft	11,288 ft	237.89	ASPHALT	0 ft	0 ft
	46 m	3,441 m	235.85		0 m	0 m
04	140 ft	6,624 ft	41.18	ASPHALT	0 ft	0 ft
	43 m	2,019 m	39.14		0 m	0 m
22	140 ft	6,624 ft	221.20	ASPHALT	0 ft	0 ft
	43 m	2,019 m	219.16		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	DME	KAG	110.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
18R	DME	VPB	110.10 MHz	18 nm 33 km	- -	-	-11 ft -11 m
22	DME	SCH	109.15 MHz	18 nm 33 km	- -	-	-11 ft -11 m
27	DME	BVB	111.55 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36C	DME	MSA	108.75 MHz	18 nm 33 km	- -	-	-11 ft -11 m
36R	DME	ABA	111.95 MHz	18 nm 33 km	- -	-	-11 ft -11 m
06	LOC-ILS	KAG	110.55 MHz	18 nm 33 km	57.88 55.84	-	-11 ft -11 m
18C	LOC-ILS	ZWA	109.50 MHz	18 nm 33 km	183.22 181.18	-	-11 ft -11 m
18R	LOC-ILS	VPB	110.10 MHz	18 nm 33 km	183.19 181.15	-	-11 ft -11 m
22	LOC-ILS	SCH	109.15 MHz	18 nm 33 km	221.20 219.16	-	-11 ft -11 m
27	LOC-ILS	BVB	111.55 MHz	18 nm 33 km	266.79 264.75	-	-11 ft -11 m
36C	LOC-ILS	MSA	108.75 MHz	18 nm 33 km	3.22 1.18	-	-11 ft -11 m
36R	LOC-ILS	ABA	111.95 MHz	18 nm 33 km	3.24 1.20	-	-11 ft -11 m
06	GS	KAG	110.55 MHz	10 nm 19 km	57.88 55.84	3.00	-11 ft -11 m
18C	GS	ZWA	109.50 MHz	10 nm 19 km	183.22 181.18	3.00	-11 ft -11 m
18R	GS	VPB	110.10 MHz	10 nm 19 km	183.19 181.15	3.00	-11 ft -11 m
22	GS	SCH	109.15 MHz	10 nm 19 km	221.20 219.16	3.00	-11 ft -11 m
27	GS	BVB	111.55 MHz	10 nm 19 km	266.79 264.75	3.00	-11 ft -11 m
36C	GS	MSA	108.75 MHz	10 nm 19 km	3.22 1.18	3.00	-11 ft -11 m
36R	GS	ABA	111.95 MHz	10 nm 19 km	3.24 1.20	3.00	-11 ft -11 m