

KLAX

Los Angeles Intl


CYVR

Vancouver International

2024/05/29 0451Z

KLAX EHF J5 YVR CYVR

942.95 nm / 1746.35 km

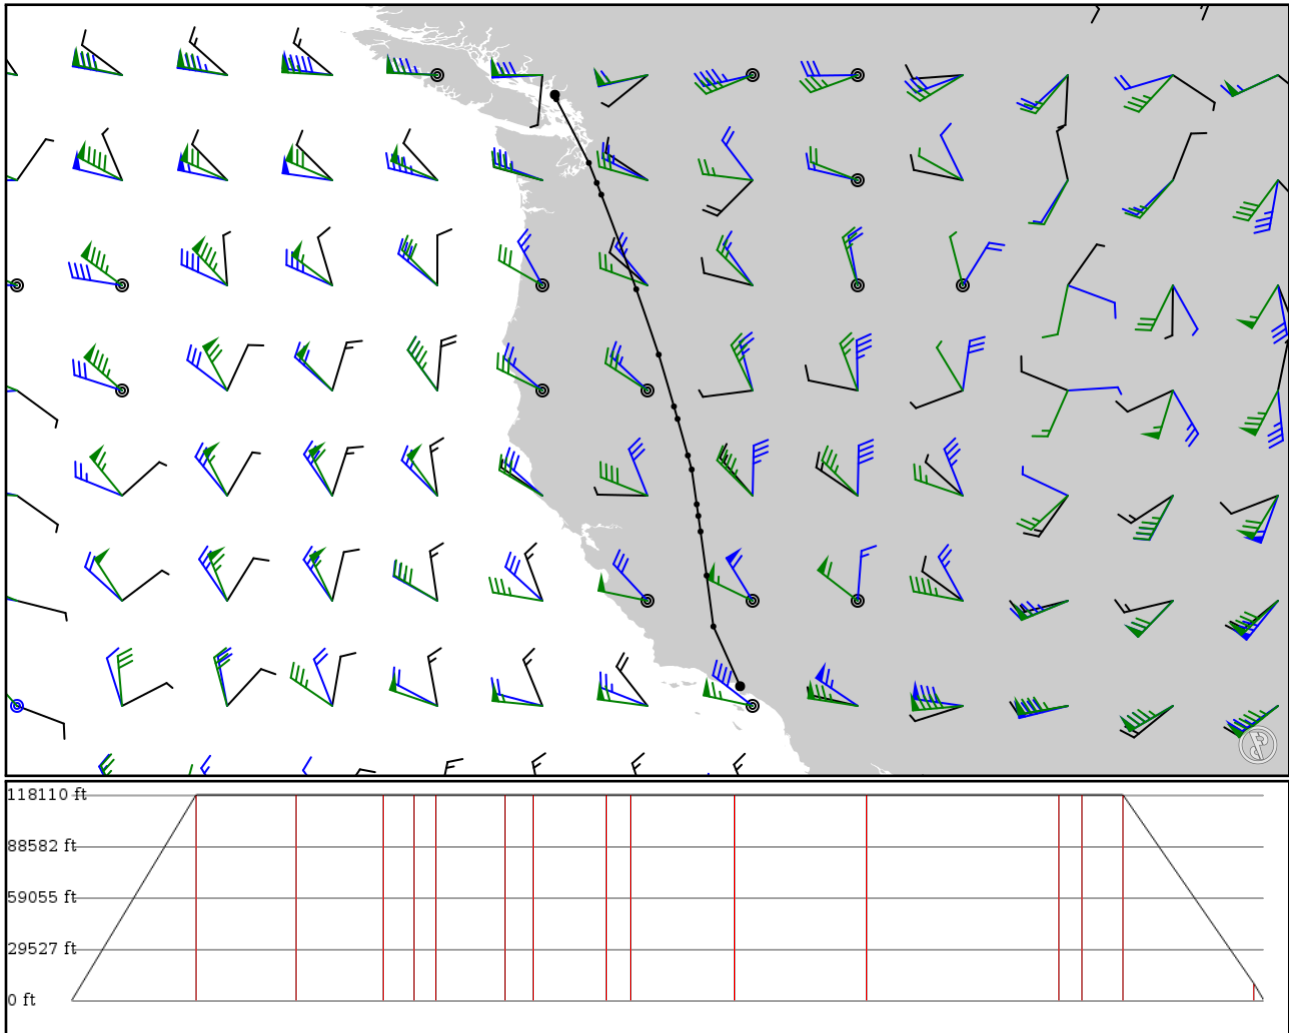

Notes

Basic altitude profile:

- Ascent Rate: 3000ft/min
- Ascent Speed: 245kts
- Cruise Altitude: 36000ft
- Cruise Speed: 280kts
- Descent Rate: 2000ft/min
- Descent Speed: 245kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAX APT	-	33.94320 -118.40800	0 ft 0 m	-	Los Angeles Intl
EHF VOR	-	35.48460 -119.09700	36,000 ft 10,973 m	98	SHAFTER (BAKERSFIELD)
PINNI FIX	J5 AWY-HI	36.79780 -119.27200	36,000 ft 10,973 m	79	-
TIOGA FIX	J5 AWY-HI	37.93290 -119.42800	36,000 ft 10,973 m	68	-
SONNY FIX	J5 AWY-HI	38.33570 -119.48500	36,000 ft 10,973 m	24	-
TILTS FIX	J5 AWY-HI	38.63470 -119.52700	36,000 ft 10,973 m	18	-
FMG VOR	J5 AWY-HI	39.53130 -119.65600	36,000 ft 10,973 m	54	MUSTANG (RENO)
PYRAM FIX	J5 AWY-HI	39.89330 -119.75600	36,000 ft 10,973 m	22	-
HARTT FIX	J5 AWY-HI	40.83590 -120.02100	36,000 ft 10,973 m	57	-
BAARB FIX	J5 AWY-HI	41.15760 -120.11400	36,000 ft 10,973 m	19	-
LKV VOR	J5 AWY-HI	42.49280 -120.50700	36,000 ft 10,973 m	82	LAKEVIEW
POWEL FIX	J5 AWY-HI	44.17870 -121.08600	36,000 ft 10,973 m	104	-
SUMMA FIX	J5 AWY-HI	46.61790 -121.98800	36,000 ft 10,973 m	151	-
TAOMA FIX	J5 AWY-HI	46.92070 -122.10600	36,000 ft 10,973 m	18	-
SEA VOR	J5 AWY-HI	47.43540 -122.31000	36,000 ft 10,973 m	32	SEATTLE
YVR VOR	J5 AWY-HI	49.07730 -123.14900	3,000 ft 914 m	104	VANCOUVER
CYVR APT	-	49.19400 -123.18500	0 ft 0 m	7	Vancouver International

KLAX

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 125 ft / 38 m
Location: 33.943100 -118.409000
Magnetic Var: 11.437 E

METAR

KLAX 290353Z 27007KT 10SM OVC007 14/12 A3003 RMK A02 SLP169 T01390122

TAF

KLAX 290315Z 2903/3006 26006KT P6SM OVC009 FM290700 VRB03KT 6SM BR OVC008 FM291600 26006KT P6SM OVC012 FM292100 2

Frequencies

COM - 122.95 MHz - UNICOM	GND - 121.65 MHz - LOS ANGELES GROUND
GND - 121.75 MHz - LOS ANGELES GROUND	GND - 121.40 MHz - LOS ANGELES GROUND
TWR - 119.80 MHz - LOS ANGELES TOWER	TWR - 120.95 MHz - LOS ANGELES TOWER
TWR - 133.90 MHz - LOS ANGELES TOWER	REC - 133.80 MHz - D-ATIS
REC - 135.65 MHz - D-ATIS	APP - 124.90 MHz - SOCAL APPROACH
APP - 124.30 MHz - SOCAL APPROACH	APP - 124.50 MHz - SOCAL APPROACH
APP - 128.50 MHz - SOCAL APPROACH	DEP - 125.20 MHz - SOCAL DEPARTURE
DEP - 124.30 MHz - SOCAL DEPARTURE	CLD - 120.35 MHz - CLEARANCE DELIVERY

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07R	200 ft	11,106 ft	82.96	CONCRETE	0 ft	381 ft
	61 m	3,385 m	71.52		0 m	116 m
25L	200 ft	11,106 ft	262.98	CONCRETE	0 ft	381 ft
	61 m	3,385 m	251.54		0 m	116 m
07L	151 ft	12,935 ft	82.95	CONCRETE	846 ft	374 ft
	46 m	3,943 m	71.52		258 m	114 m
25R	151 ft	12,935 ft	262.98	CONCRETE	968 ft	197 ft
	46 m	3,943 m	251.54		295 m	60 m
06R	151 ft	10,896 ft	82.95	CONCRETE	551 ft	384 ft
	46 m	3,321 m	71.51		168 m	117 m
24L	151 ft	10,896 ft	262.97	CONCRETE	814 ft	384 ft
	46 m	3,321 m	251.53		248 m	117 m
06L	151 ft	8,936 ft	82.95	CONCRETE	0 ft	0 ft
	46 m	2,724 m	71.51		0 m	0 m
24R	151 ft	8,936 ft	262.96	CONCRETE	0 ft	285 ft
	46 m	2,724 m	251.53		0 m	87 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	DME	IUWU	108.50 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
06R	DME	IGPE	111.70 MHz	18 nm	-	-	120 ft
				33 km	-		120 m
07L	DME	IIAS	111.10 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
07R	DME	IMKZ	109.90 MHz	18 nm	-	-	103 ft
				33 km	-		103 m
24L	DME	IHQB	111.70 MHz	18 nm	-	-	133 ft
				33 km	-		133 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24R	DME	IOSS	108.50 MHz	18 nm 33 km	- -	-	133 ft 133 m
25L	DME	ILAX	109.90 MHz	18 nm 33 km	- -	-	126 ft 126 m
25R	DME	ICFN	111.10 MHz	18 nm 33 km	- -	-	126 ft 126 m
06L	LOC-ILS	IUWU	108.50 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
06R	LOC-ILS	IGPE	111.70 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
07L	LOC-ILS	IIAS	111.10 MHz	18 nm 33 km	82.98 71.54	-	125 ft 125 m
07R	LOC-ILS	IMKZ	109.90 MHz	18 nm 33 km	82.97 71.53	-	125 ft 125 m
24L	LOC-ILS	IHQB	111.70 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
24R	LOC-ILS	IOSS	108.50 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25L	LOC-ILS	ILAX	109.90 MHz	18 nm 33 km	262.97 251.53	-	125 ft 125 m
25R	LOC-ILS	ICFN	111.10 MHz	18 nm 33 km	262.98 251.54	-	125 ft 125 m
06L	GS	IUWU	108.50 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
06R	GS	IGPE	111.70 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
07L	GS	IIAS	111.10 MHz	10 nm 19 km	82.98 71.54	3.00	125 ft 125 m
07R	GS	IMKZ	109.90 MHz	10 nm 19 km	82.97 71.53	3.00	125 ft 125 m
24L	GS	IHQB	111.70 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
24R	GS	IOSS	108.50 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25L	GS	ILAX	109.90 MHz	10 nm 19 km	262.97 251.53	3.00	125 ft 125 m
25R	GS	ICFN	111.10 MHz	10 nm 19 km	262.98 251.54	3.00	125 ft 125 m

CYVR

Region: CANADA

Timezone: AMERICA/VANCOUVER

Runways: 3

Elevation: 13 ft / 4 m

Location: 49.194000 -123.185000

Magnetic Var: 15.260 E

METAR

CYVR 290400Z 24009KT 20SM FEW055 FEW080 12/06 A3012 RMK SC1AC1 SLP201

TAF

TAF CYVR 290241Z 2903/3006 22012KT P6SM FEW020 SCT060 FM291000 24008KT P6SM BKN040 TEMPO 2910/2920 P6SM -SHRA BKN0

Frequencies

REC - 124.60 MHz - ATIS

GND - 121.70 MHz - VANCOUVER GROUND

TWR - 118.70 MHz - VANCOUVER TOWER

APP - 128.60 MHz - VANCOUVER APPROACH

DEP - 126.12 MHz - VANCOUVER DEPARTURE

CLD - 121.40 MHz - CLEARANCE DELIVERY

GND - 127.50 MHz - VANCOUVER GROUND

TWR - 119.55 MHz - VANCOUVER TOWER

APP - 133.10 MHz - VANCOUVER APPROACH

DEP - 132.30 MHz - VANCOUVER DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08R	200 ft	10,777 ft	99.88	ASPHALT	0 ft	0 ft
	61 m	3,285 m	84.62		0 m	0 m
26L	200 ft	10,777 ft	279.91	ASPHALT	0 ft	0 ft
	61 m	3,285 m	264.65		0 m	0 m
13	200 ft	7,294 ft	141.92	ASPHALT	0 ft	0 ft
	61 m	2,223 m	126.66		0 m	0 m
31	200 ft	7,294 ft	321.93	ASPHALT	0 ft	0 ft
	61 m	2,223 m	306.67		0 m	0 m
08L	200 ft	9,916 ft	99.89	CONCRETE	0 ft	0 ft
	61 m	3,022 m	84.63		0 m	0 m
26R	200 ft	9,916 ft	279.92	CONCRETE	0 ft	0 ft
	61 m	3,022 m	264.66		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	ITL	110.55 MHz	18 nm	-	-	1 ft
				33 km	-		1 m
08R	DME	IVR	109.50 MHz	18 nm	-	-	4 ft
				33 km	-		4 m
26L	DME	IFZ	111.95 MHz	20 nm	-	-	10 ft
				37 km	-		10 m
26R	DME	IRD	110.70 MHz	20 nm	-	-	10 ft
				37 km	-		10 m
08L	LOC-ILS	ITL	110.55 MHz	18 nm	99.90	-	13 ft
				33 km	84.64		13 m
08R	LOC-ILS	IVR	109.50 MHz	18 nm	99.89	-	13 ft
				33 km	84.63		13 m
13	LOC-ILS	IMK	111.10 MHz	18 nm	141.93	-	13 ft
				33 km	126.67		13 m
26L	LOC-ILS	IFZ	110.70 MHz	18 nm	279.89	-	13 ft
				33 km	264.63		13 m
26R	LOC-ILS	IRD	111.95 MHz	18 nm	279.90	-	13 ft

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
				33 km	264.64		13 m
08L	GS	ITL	110.55 MHz	10 nm	99.90	3.00	13 ft
				19 km	84.64		13 m
08R	GS	IVR	109.50 MHz	10 nm	99.89	3.00	13 ft
				19 km	84.63		13 m
13	GS	IMK	111.10 MHz	10 nm	141.93	3.00	13 ft
				19 km	126.67		13 m
26L	GS	IFZ	110.70 MHz	10 nm	279.89	3.00	13 ft
				19 km	264.63		13 m
26R	GS	IRD	111.95 MHz	10 nm	279.90	3.00	13 ft
				19 km	264.64		13 m