


2024/05/08 0450Z

PABR TUNDA V438 ATCAL PASC

176.88 nm / 327.59 km

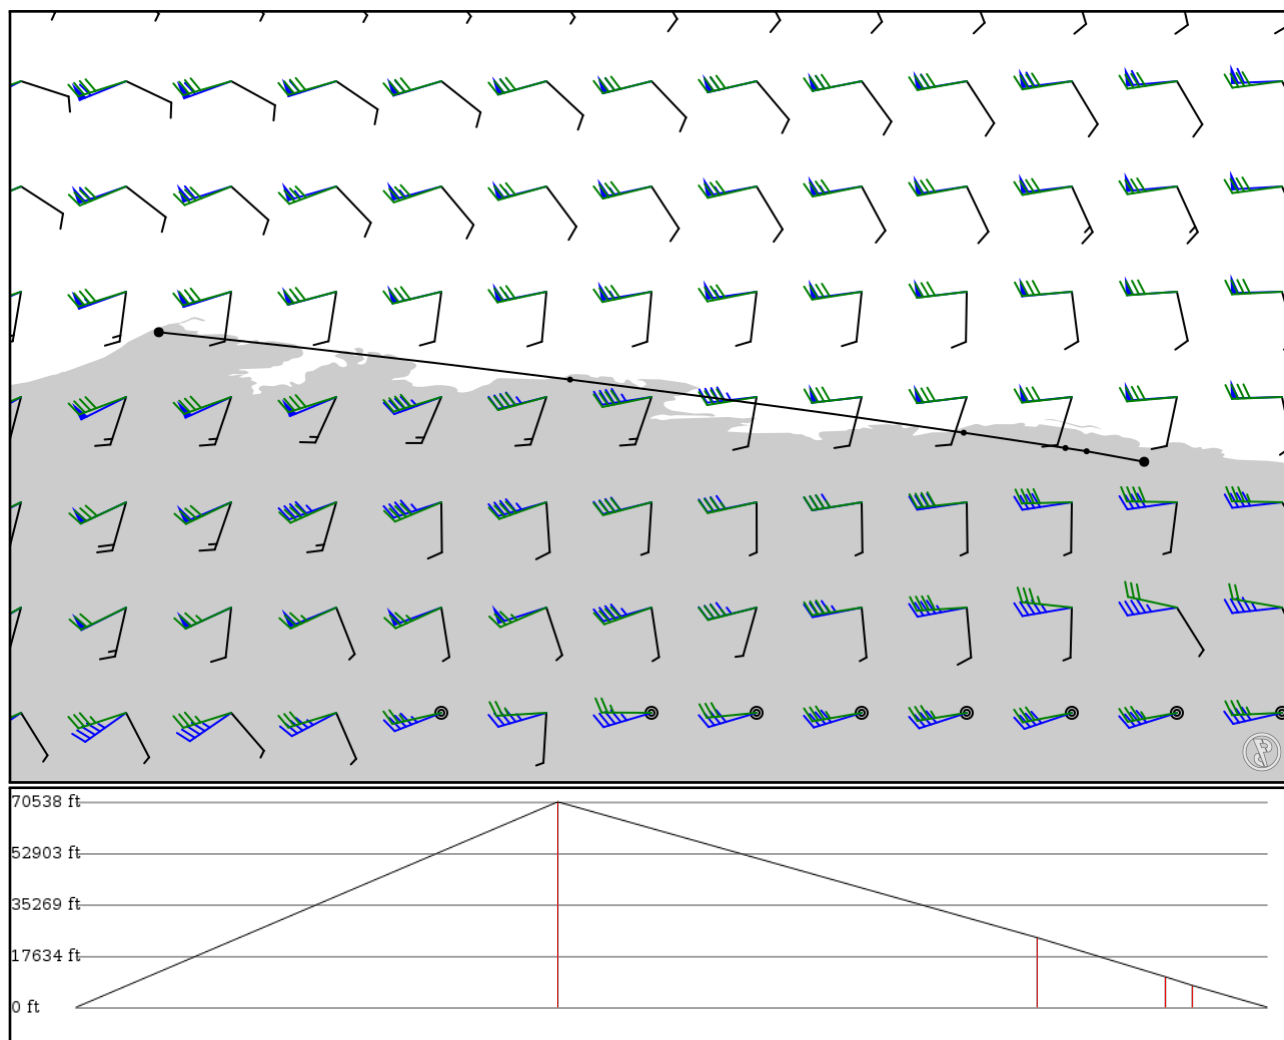

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
PABR APT	-	71.28466 -156.76875	0 ft 0 m	-	WILEY POST WILL ROGERS MEM
TUNDA FIX	-	70.88617 -153.30306	21,500 ft 6,553 m	71	-
OOSIK FIX	V438 AWY-LO	70.43943 -149.98583	7,300 ft 2,225 m	71	-
YIGUF FIX	V438 AWY-LO	70.31069 -149.12918	3,200 ft 975 m	18	-
ATCAL FIX	V438 AWY-LO	70.28328 -148.95038	2,300 ft 701 m	3	-
PASC APT	-	70.19475 -148.46516	0 ft 0 m	11	DEADHORSE

PABR

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 1

Elevation: 47 ft / 14 m

Location: 71.284900 -156.769000

Magnetic Var: 11.029 E

METAR

PABR 080353Z 00000KT 10SM OVC006 M04/M07 A2987

TAF

PABR 072322Z 0800/0824 06010KT 5SM BR OVC005 FM081200 04006KT 2SM -SN BR OVC004

Frequencies

REC - 132.15 MHz - ASOS

APP - 135.30 MHz - ANCHORAGE ARTCC APP

TWR - 123.60 MHz - CTAF

DEP - 239.25 MHz - ANCHORAGE ARTCC DEP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	150 ft	7,107 ft	89.93	ASPHALT	600 ft	177 ft
	46 m	2,166 m	78.90		183 m	54 m
25	150 ft	7,107 ft	269.99	ASPHALT	600 ft	187 ft
	46 m	2,166 m	258.96		183 m	57 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
07	DME	IBRW	109.10 MHz	18 nm	-	-	44 ft
				33 km	-		44 m
07	LOC-ILS	IBRW	110.50 MHz	18 nm	91.13	-	44 ft
				33 km	80.10		44 m
07	GS	IBRW	110.50 MHz	10 nm	91.27	3.00	41 ft
				19 km	80.24		41 m

PASC

Region: USA (ALASKA)

Timezone: AMERICA/ANCHORAGE

Runways: 1

Elevation: 67 ft / 20 m

Location: 70.194700 -148.465000

Magnetic Var: 14.358 E

METAR

PASC 080353Z 28005KT 10SM OVC012 M07/M11 A2987

TAF

TAF PASC 072322Z 0800/0824 25009KT P6SM SCT003 OVC010 FM080600 25005KT 2SM -SN BR OVC004

Frequencies

REC - 118.40 MHz - AWOS

COM - 123.60 MHz - CTAF

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06	150 ft	6,471 ft	75.00	ASPHALT	0 ft	194 ft
	46 m	1,972 m	60.64		0 m	59 m
24	150 ft	6,471 ft	255.05	ASPHALT	0 ft	200 ft
	46 m	1,972 m	240.69		0 m	61 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06	LOC-ILS	ISCC	109.30 MHz	18 nm	75.03	-	67 ft
				33 km	60.67		67 m
24	LOC-LOC	ISCC	109.30 MHz	18 nm	255.03	-	67 ft
				33 km	240.67		67 m
06	GS	ISCC	109.30 MHz	10 nm	75.03	3.00	67 ft
				19 km	60.67		67 m