


2024/05/06 0241Z

KLAS BTY **V105** OAL **T298** NIKOL **V244** HABXU KSFO

395.42 nm / 732.32 km

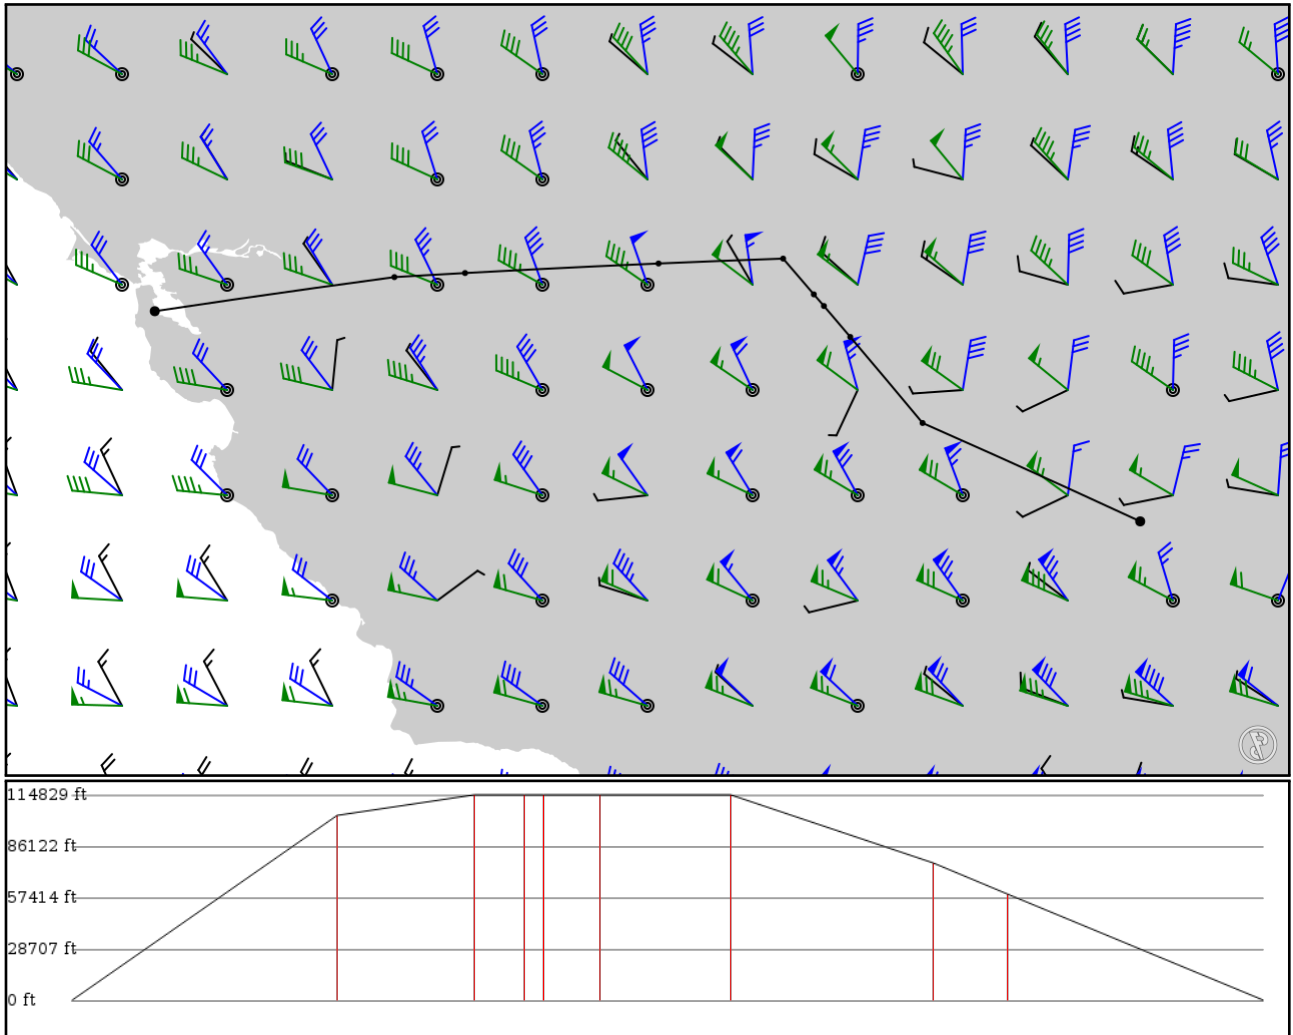

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: no

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KLAS APT	-	36.08080 -115.15300	0 ft 0 m	-	McCarran Intl
BTY VOR	-	36.80060 -116.74800	31,500 ft 9,601 m	88	BEATTY
LIDAT FIX	V105 AWY-LO	37.43020 -117.27800	35,000 ft 10,668 m	45	-
TEZUM FIX	V105 AWY-LO	37.65650 -117.47100	35,000 ft 10,668 m	16	-
ZOTUX FIX	V105 AWY-LO	37.74170 -117.54500	35,000 ft 10,668 m	6	-
OAL VOR	V105 AWY-LO	38.00330 -117.77000	35,000 ft 10,668 m	18	COALDALE
NIKOL FIX	T298 AWY-LO	37.96750 -118.68300	35,000 ft 10,668 m	43	-
DUCKE FIX	V244 AWY-LO	37.89770 -120.10100	23,400 ft 7,132 m	67	-
HABXU FIX	V244 AWY-LO	37.86790 -120.61900	18,100 ft 5,517 m	24	-
KSFO APT	-	37.61850 -122.37500	0 ft 0 m	84	San Francisco Intl

# KLAS

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 4

Elevation: 2,180 ft / 664 m  
Location: 36.080700 -115.153000  
Magnetic Var: 11.049 E

## METAR

KLAS 060156Z 35006G20KT 10SM FEW100 20/M14 A2977 RMK A02 SLP066 T02001144 \$

## TAF

KLAS 060045Z 0601/0706 24008KT P6SM SKC FM061500 35008KT P6SM SKC FM062000 16008KT P6SM FEW250 FM070200 22007KT P6SM

## Frequencies

REC - 132.40 MHz - D-ATIS  
CLD - 118.00 MHz - CLEARANCE DELIVERY  
GND - 121.90 MHz - LAS VEGAS GROUND  
TWR - 118.75 MHz - LAS VEGAS TOWER  
APP - 125.60 MHz - LAS VEGAS APPROACH  
DEP - 125.90 MHz - LAS VEGAS DEPARTURE

COM - 122.95 MHz - UNICOM  
GND - 121.10 MHz - LAS VEGAS GROUND  
TWR - 128.80 MHz - LAS VEGAS TOWER  
TWR - 119.90 MHz - LAS VEGAS TOWER  
APP - 125.02 MHz - LAS VEGAS APPROACH  
DEP - 133.95 MHz - LAS VEGAS DEPARTURE

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08L	151 ft	14,525 ft	89.92	CONCRETE	2,152 ft	0 ft
	46 m	4,427 m	78.87		656 m	0 m
26R	151 ft	14,525 ft	269.95	CONCRETE	1,414 ft	374 ft
	46 m	4,427 m	258.90		431 m	114 m
08R	151 ft	10,535 ft	89.92	CONCRETE	0 ft	381 ft
	46 m	3,211 m	78.87		0 m	116 m
26L	151 ft	10,535 ft	269.94	CONCRETE	0 ft	381 ft
	46 m	3,211 m	258.89		0 m	116 m
01R	151 ft	9,779 ft	24.82	CONCRETE	486 ft	400 ft
	46 m	2,981 m	13.77		148 m	122 m
19L	151 ft	9,779 ft	204.83	CONCRETE	876 ft	394 ft
	46 m	2,981 m	193.78		267 m	120 m
01L	151 ft	8,998 ft	24.82	CONCRETE	584 ft	400 ft
	46 m	2,743 m	13.78		178 m	122 m
19R	151 ft	8,998 ft	204.83	CONCRETE	0 ft	0 ft
	46 m	2,743 m	193.78		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01L	DME	ICUA	110.10 MHz	18 nm	-	-	2,092 ft
				33 km	-		2,092 m
26R	DME	ILAS	110.30 MHz	18 nm	-	-	2,203 ft
				33 km	-		2,203 m
01L	LOC-ILS	ICUA	110.10 MHz	18 nm	24.83	-	2,180 ft
				33 km	13.78		2,180 m
26L	LOC-ILS	IRLE	111.50 MHz	18 nm	269.93	-	2,180 ft
				33 km	258.88		2,180 m
26R	LOC-ILS	ILAS	110.30 MHz	18 nm	269.94	-	2,180 ft
				33 km	258.89		2,180 m
01L	GS	ICUA	110.10 MHz	10 nm	24.83	3.40	2,180 ft
				19 km	13.78		2,180 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
26L	GS	IRLE	111.50 MHz	10 nm	269.93	3.00	2,180 ft
				19 km	258.88		2,180 m
26R	GS	ILAS	110.30 MHz	10 nm	269.94	3.00	2,180 ft
				19 km	258.89		2,180 m

## KSFO

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 4

Elevation: 13 ft / 4 m  
Location: 37.618500 -122.375000  
Magnetic Var: 12.844 E

## METAR

KSFO 060156Z 26016G26KT 10SM FEW025 13/06 A3009 RMK A02 PK WND 29027/0058 SLP188 T01280056 \$

## TAF

KSFO 052327Z 0600/0706 28018G31KT P6SM FEW025 FM060400 28014KT P6SM FEW250 FM061000 28008KT P6SM FEW250 FM062000

## Frequencies

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.05		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.07		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.05		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.07		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.87		0 m	136 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m