


2024/05/09 2139Z

KDCA FANAP JAKKS KK63I CIBAR NACIK TOJAM EACKS 11059 R0585 KSFO

2118.26 nm / 3923.01 km

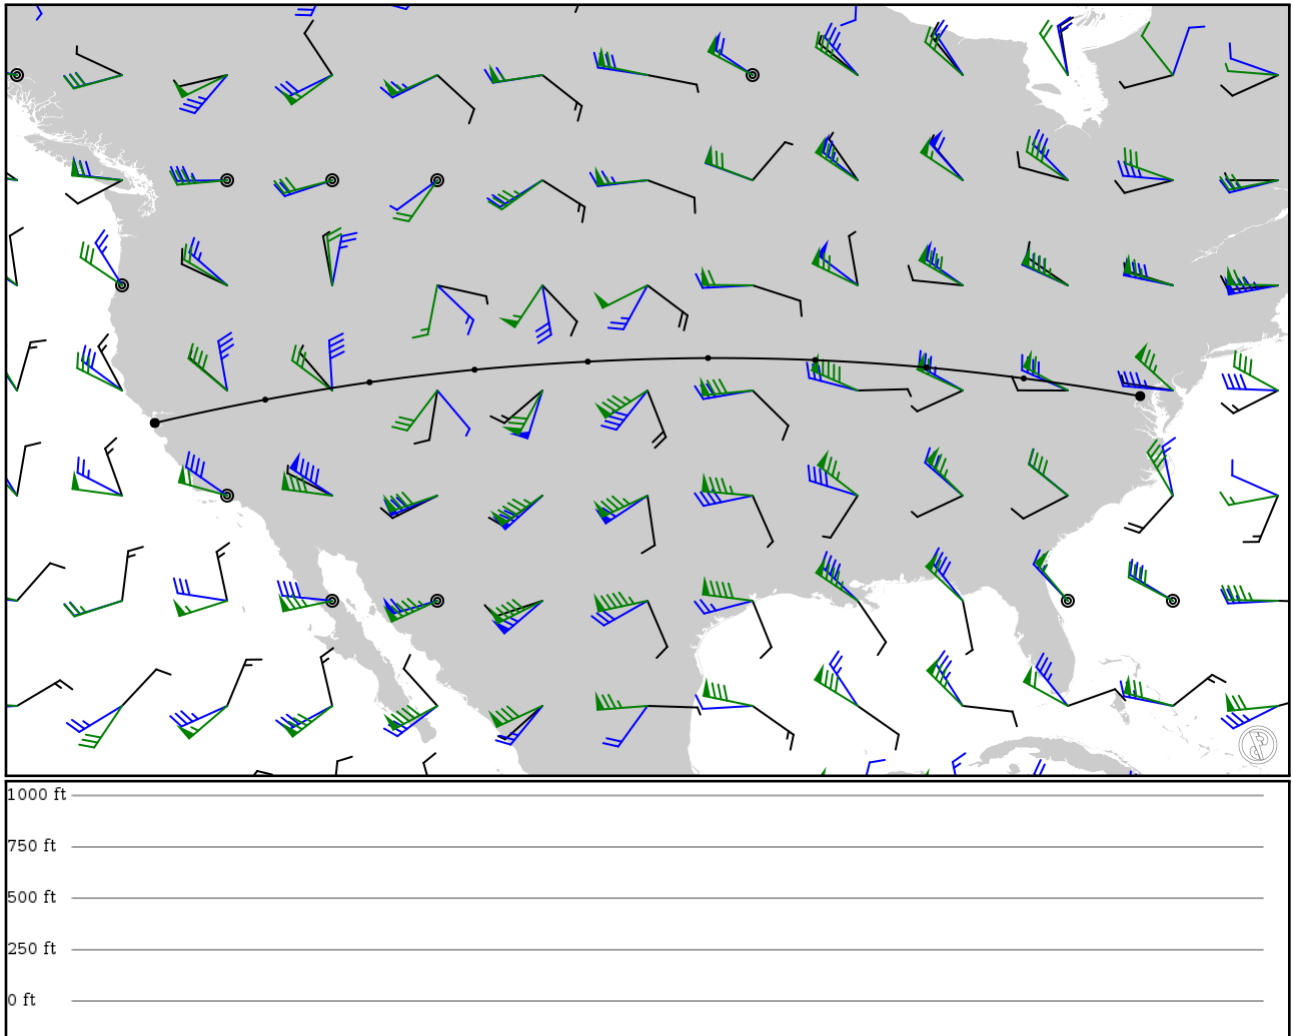

Notes

Generated

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KDCA	-	38.84227	0 ft	-	-
APT	-	-77.04076	0 m		
FANAP	-	39.65753	0 ft	253	-
FIX	-	-82.39722	0 m		
JAKKS	-	40.16425	0 ft	208	-
FIX	-	-86.87511	0 m		
KK63I	-	40.50000	0 ft	235	-
FIX	-	-92.00000	0 m		
CIBAR	-	40.59365	0 ft	224	-
FIX	-	-96.92505	0 m		
NACIK	-	40.42878	0 ft	252	-
FIX	-	-102.45713	0 m		
TOJAM	-	40.05753	0 ft	239	-
FIX	-	-107.66614	0 m		
EACKS	-	39.48022	0 ft	225	-
FIX	-	-112.49875	0 m		
11059	-	38.67915	0 ft	228	-
FIX	-	-117.29923	0 m		
R0585	-	37.61353	0 ft	247	-
FIX	-	-122.35714	0 m		
KSFO	-	37.60898	0 ft	1	-
APT	-	-122.38220	0 m		

KDCA

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 15 ft / 5 m
Location: 38.851400 -77.037700
Magnetic Var: 10.879 W

METAR

KDCA 092052Z 06010KT 10SM BKN075 BKN100 23/14 A2964 RMK A02 SLP035 T02330139 58017

TAF

KDCA 092101Z 0921/1024 06010KT P6SM VCSH BKN050 FM100200 08007KT P6SM VCTS BKN030CB FM100400 07005KT P6SM -SHRA B

Frequencies

REC - 132.65 MHz - ATIS	COM - 122.95 MHz - UNICOM
CLD - 128.25 MHz - CLEARANCE DELIVERY	GND - 121.70 MHz - WASHINGTON GROUND
TWR - 119.10 MHz - WASHINGTON TOWER	TWR - 134.35 MHz - WASHINGTON TOWER
APP - 119.85 MHz - POTOMAC APPROACH	APP - 124.20 MHz - POTOMAC APPROACH
APP - 124.70 MHz - POTOMAC APPROACH	DEP - 118.95 MHz - POTOMAC DEPARTURE
DEP - 125.65 MHz - POTOMAC DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
01	151 ft	7,183 ft	355.53	ASPHALT	0 ft	200 ft
	46 m	2,190 m	6.41		0 m	61 m
19	151 ft	7,183 ft	175.53	ASPHALT	0 ft	197 ft
	46 m	2,190 m	186.41		0 m	60 m
15	151 ft	5,205 ft	142.76	ASPHALT	0 ft	413 ft
	46 m	1,587 m	153.64		0 m	126 m
33	151 ft	5,205 ft	322.77	ASPHALT	0 ft	180 ft
	46 m	1,587 m	333.65		0 m	55 m
04	151 ft	5,009 ft	25.45	ASPHALT	203 ft	0 ft
	46 m	1,527 m	36.33		62 m	0 m
22	151 ft	5,009 ft	205.46	ASPHALT	0 ft	381 ft
	46 m	1,527 m	216.34		0 m	116 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
01	DME	IDCA	109.90 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
19	DME	IVWH	108.50 MHz	18 nm	-	-	15 ft
				33 km	-		15 m
01	LOC-ILS	IDCA	109.90 MHz	18 nm	355.51	-	15 ft
				33 km	6.39		15 m
01	GS	IDCA	109.90 MHz	10 nm	355.51	3.00	15 ft
				19 km	6.39		15 m

KSFO

Region: UNITED STATES
Timezone: AMERICA/LOS_ANGELES
Runways: 4

Elevation: 13 ft / 4 m
Location: 37.618500 -122.375000
Magnetic Var: 12.843 E

METAR

KSFO 092056Z 06004KT 10SM FEW250 24/10 A2991 RMK AO2 SLP127 T02440100 56004 \$

TAF

TAF AMD KSFO 092056Z 0921/1024 05006KT P6SM SKC FM092300 27013KT P6SM SKC FM100500 28003KT P6SM SKC FM101500 03005

Frequencies

REC - 113.70 MHz - D-ATIS	REC - 115.80 MHz - D-ATIS
REC - 118.85 MHz - D-ATIS	COM - 122.95 MHz - UNICOM
CLD - 118.20 MHz -	GND - 121.80 MHz - SAN FRANCISCO GROUND
SAN FRANCISCO CLEARANCE DELIVERY	APP - 134.50 MHz - NORCAL APPROACH
TWR - 120.50 MHz - SAN FRANCISCO TOWER	APP - 128.57 MHz - NORCAL APPROACH
APP - 128.32 MHz - NORCAL APPROACH	DEP - 120.90 MHz - NORCAL DEPARTURE
APP - 133.95 MHz - NORCAL APPROACH	
DEP - 135.10 MHz - NORCAL DEPARTURE	

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
10L	200 ft	11,859 ft	117.90	ASPHALT	0 ft	876 ft
	61 m	3,615 m	105.05		0 m	267 m
28R	200 ft	11,859 ft	297.92	ASPHALT	302 ft	318 ft
	61 m	3,615 m	285.08		92 m	97 m
10R	200 ft	11,371 ft	117.90	ASPHALT	0 ft	748 ft
	61 m	3,466 m	105.05		0 m	228 m
28L	200 ft	11,371 ft	297.92	ASPHALT	305 ft	322 ft
	61 m	3,466 m	285.07		93 m	98 m
01R	200 ft	8,665 ft	27.71	ASPHALT	564 ft	404 ft
	61 m	2,641 m	14.87		172 m	123 m
19L	200 ft	8,665 ft	207.72	ASPHALT	0 ft	443 ft
	61 m	2,641 m	194.88		0 m	135 m
01L	200 ft	7,664 ft	27.71	ASPHALT	643 ft	469 ft
	61 m	2,336 m	14.87		196 m	143 m
19R	200 ft	7,664 ft	207.72	ASPHALT	0 ft	446 ft
	61 m	2,336 m	194.87		0 m	136 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
19L	DME	ISIA	108.90 MHz	18 nm	-	-	24 ft
				33 km	-		24 m
28L	DME	ISFO	109.55 MHz	18 nm	-	-	22 ft
				33 km	-		22 m
28R	DME	IGWQ	111.70 MHz	18 nm	-	-	17 ft
				33 km	-		17 m
28R	DME	IFNP	110.75 MHz	18 nm	-	-	13 ft
				33 km	-		13 m
19L	LOC-ILS	ISIA	108.90 MHz	18 nm	207.72	-	13 ft
				33 km	194.88		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
28L	LOC-ILS	ISFO	109.55 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
28R	LOC-ILS	IGWQ	111.70 MHz	18 nm	297.91	-	13 ft
				33 km	285.07		13 m
19L	GS	ISIA	108.90 MHz	10 nm	207.72	3.00	13 ft
				19 km	194.88		13 m
28L	GS	ISFO	109.55 MHz	10 nm	297.91	2.85	13 ft
				19 km	285.07		13 m
28R	GS	IGWQ	111.70 MHz	10 nm	297.91	3.00	13 ft
				19 km	285.07		13 m