


2024/05/18 2328Z

LFTF SODRI **G374** RATAP **UM728** DOKAR **M728** KISTO LIRF

286.46 nm / 530.52 km

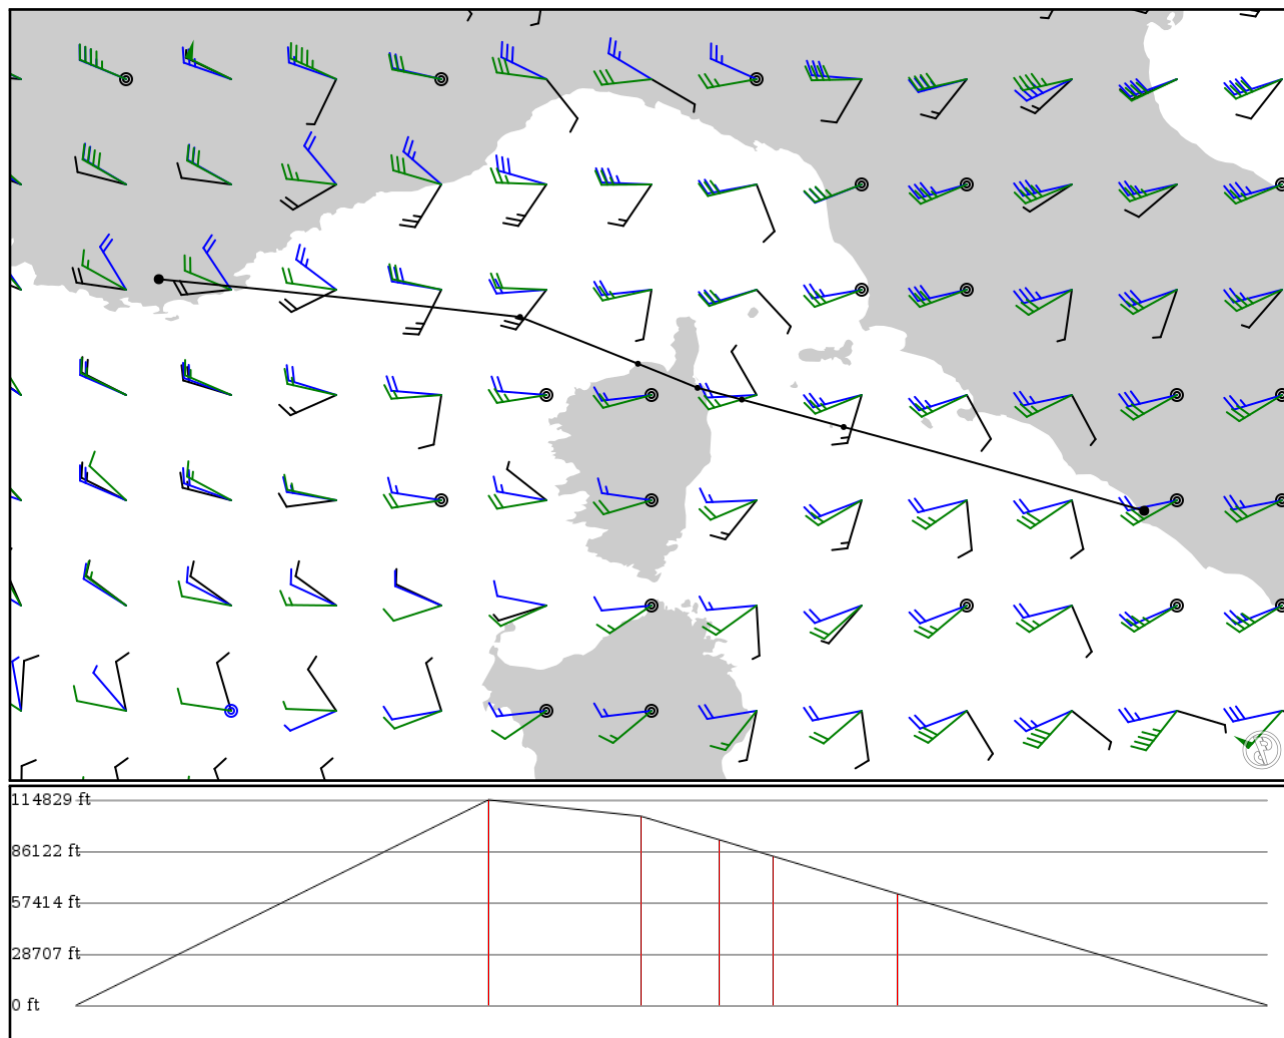

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LFTF	-	43.24760	0 ft	-	Pierrefeu
APT	-	6.12664	0 m		
SODRI	-	43.01310	35,000 ft	99	-
FIX	-	8.37194	10,668 m		
RATAP	G374	42.72310	32,200 ft	36	-
FIX	AWY-LO	9.10444	9,815 m		
BTA	UM728	42.57360	28,200 ft	18	BASTIA PORETTA
VOR	AWY-HI	9.47483	8,595 m		
DOKAR	UM728	42.50080	25,400 ft	12	-
FIX	AWY-HI	9.75000	7,742 m		
KISTO	M728	42.33060	19,000 ft	29	-
FIX	AWY-HI	10.38310	5,791 m		
LIRF	-	41.81080	0 ft	88	Leonardo da Vinci-Fiumicino
APT	-	12.25090	0 m		

## LIRF

Region: ITALY  
Timezone: EUROPE/ROME  
Runways: 3

Elevation: 13 ft / 4 m  
Location: 41.810800 12.250900  
Magnetic Var: 3.668 E

## METAR

LIRF 182250Z 06004KT CAVOK 16/14 Q1012 NOSIG

## TAF

TAF LIRF 181700Z 1818/1924 10006KT 9999 FEW050 TEMPO 1904/1914 4000 TSRA BECMG 1907/1909 16013KT

## Frequencies

REC - 120.17 MHz - ATIS ARRIVAL	REC - 126.12 MHz - ATIS ARRIVAL
REC - 121.85 MHz - ATIS DEPARTURE	CLD - 121.80 MHz - CLEARANCE DELIVERY
GND - 121.72 MHz - FIUME APRON	GND - 121.67 MHz - FIUME GROUND
GND - 121.90 MHz - FIUME GROUND	GND - 122.12 MHz - FIUME GROUND
TWR - 127.62 MHz - FIUME TOWER	TWR - 123.72 MHz - FIUME TOWER
TWR - 118.70 MHz - FIUME TOWER	DEP - 130.90 MHz - ROMA DEPARTURE
DEP - 131.10 MHz - ROMA DEPARTURE	APP - 127.95 MHz - ROMA ARRIVAL
APP - 125.50 MHz - ROMA ARRIVAL	APP - 119.20 MHz - ROMA DIRECT
APP - 131.25 MHz - ROMA DIRECT	

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
07	148 ft	10,859 ft	69.68	ASPHALT	1,348 ft	0 ft
	45 m	3,310 m	66.01		411 m	0 m
25	148 ft	10,859 ft	249.71	ASPHALT	0 ft	0 ft
	45 m	3,310 m	246.04		0 m	0 m
16R	197 ft	12,814 ft	162.66	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.00		0 m	0 m
34L	197 ft	12,814 ft	342.67	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.01		0 m	0 m
16L	197 ft	12,814 ft	162.68	ASPHALT	0 ft	0 ft
	60 m	3,906 m	159.01		0 m	0 m
34R	197 ft	12,814 ft	342.69	ASPHALT	0 ft	0 ft
	60 m	3,906 m	339.02		0 m	0 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
25	DME	FEE	110.15 MHz	25 nm	-	-	25 ft
				46 km	-		25 m
34L	DME	ISW	108.90 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
34R	DME	FSS	111.55 MHz	25 nm	-	-	15 ft
				46 km	-		15 m
16L	LOC-ILS	IFLL	108.10 MHz	18 nm	162.69	-	13 ft
				33 km	159.02		13 m
16R	LOC-ILS	IFRR	109.75 MHz	18 nm	162.67	-	13 ft
				33 km	159.00		13 m
25	LOC-ILS	FEE	110.15 MHz	18 nm	249.69	-	13 ft
				33 km	246.02		13 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34L	LOC-ILS	IFSW	108.90 MHz	18 nm	342.67	-	13 ft
				33 km	339.00		13 m
34R	LOC-ILS	FSS	111.55 MHz	18 nm	342.69	-	13 ft
				33 km	339.02		13 m
16L	GS	IFLL	108.10 MHz	10 nm	162.69	3.00	13 ft
				19 km	159.02		13 m
16R	GS	IFRR	109.75 MHz	10 nm	162.67	3.00	13 ft
				19 km	159.00		13 m
25	GS	FEE	110.15 MHz	10 nm	249.69	3.00	13 ft
				19 km	246.02		13 m
34L	GS	IFSW	108.90 MHz	10 nm	342.67	3.00	13 ft
				19 km	339.00		13 m
34R	GS	FSS	111.55 MHz	10 nm	342.69	3.00	13 ft
				19 km	339.02		13 m