

CYYZ

Toronto Pearson Intl


KBQR

BUFFALO LANCASTER

2024/05/16 0515Z

CYYZ AGDOX KBQR

63.40 nm / 117.42 km

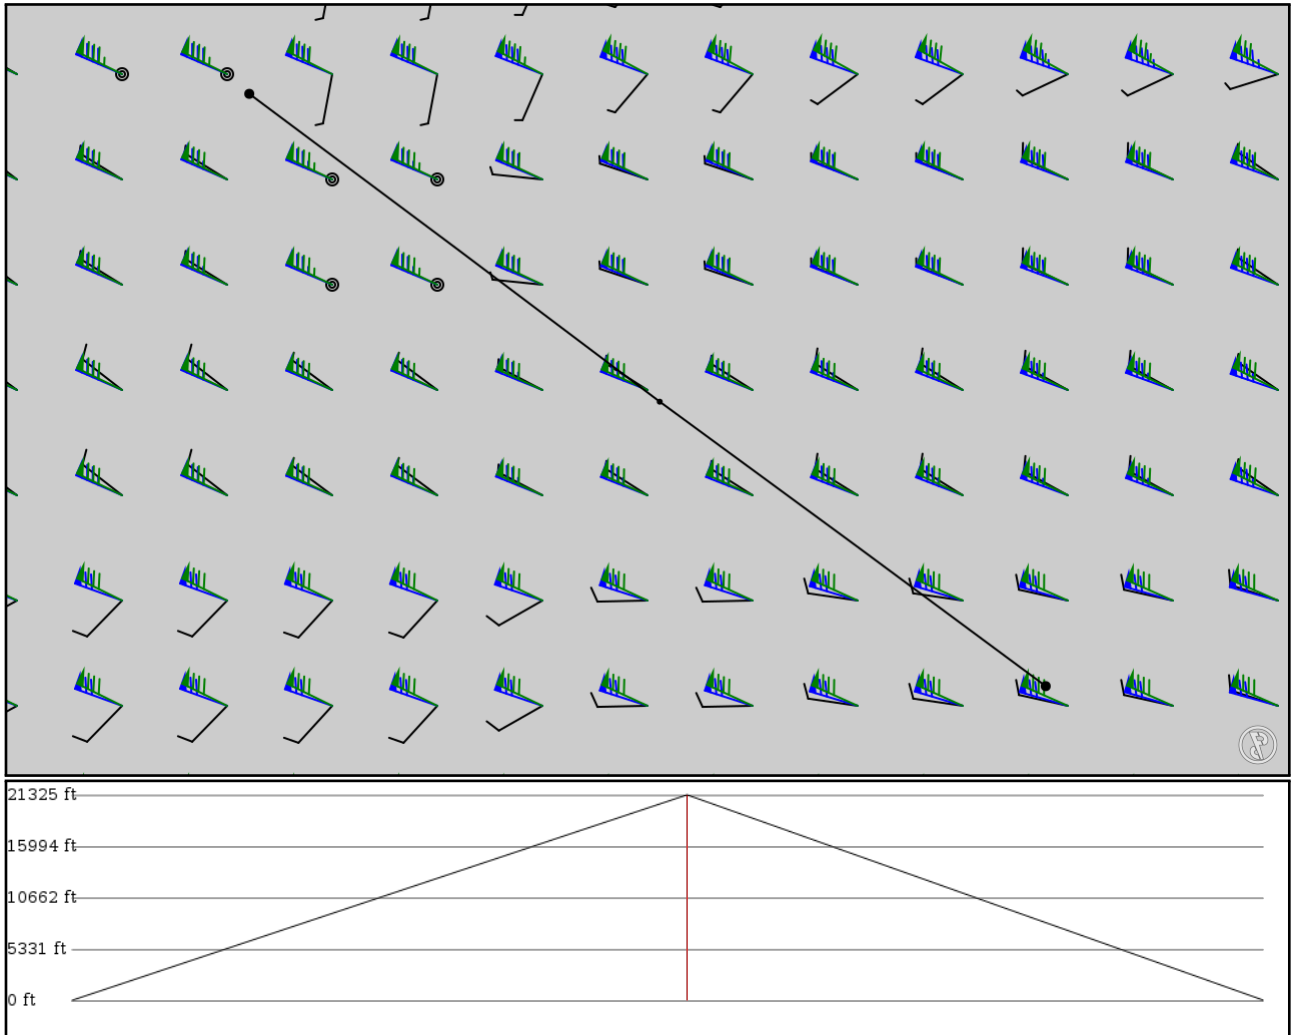

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
CYYZ	-	43.67610	0 ft	-	Toronto Pearson Intl
APT	-	-79.62770	0 m		
AGDOX	-	43.28430	6,500 ft	32	-
FIX	-	-79.10440	1,981 m		
KBQR	-	42.92230	0 ft	30	BUFFALO LANCASTER
APT	-	-78.61230	0 m		

CYYZ

Region: CANADA
Timezone: AMERICA/TORONTO
Runways: 5

Elevation: 564 ft / 172 m
Location: 43.676100 -79.627700
Magnetic Var: 10.260 W

METAR

CYYZ 160500Z VRB02KT 15SM SKC 14/14 A2984 RMK SLP107

TAF

TAF CYYZ 160240Z 1603/1706 VRB03KT P6SM FEW050 BKN120 FM160700 35006KT P6SM SCT040 FM161300 01008KT P6SM FEW040 B

Frequencies

TWR - 118.35 MHz - TORONTO TOWER	TWR - 118.70 MHz - TORONTO TOWER
GND - 119.10 MHz - TORONTO GROUND	GND - 121.65 MHz - TORONTO GROUND
GND - 121.90 MHz - TORONTO GROUND	REC - 120.82 MHz - ATIS
REC - 133.10 MHz - ATIS	CLD - 121.30 MHz - CLEARANCE DELIVERY
APP - 132.80 MHz - TORONTO APPROACH	APP - 124.47 MHz - TORONTO APPROACH
APP - 125.40 MHz - TORONTO APPROACH	APP - 123.27 MHz - LONDON RADIO
DEP - 127.57 MHz - TORONTO DEPARTURE	DEP - 128.80 MHz - TORONTO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	9,707 ft	46.43	ASPHALT	0 ft	131 ft
	60 m	2,959 m	56.69		0 m	40 m
24R	197 ft	9,707 ft	226.45	ASPHALT	194 ft	98 ft
	60 m	2,959 m	236.71		59 m	30 m
06R	197 ft	9,007 ft	46.43	ASPHALT	0 ft	95 ft
	60 m	2,745 m	56.69		0 m	29 m
24L	197 ft	9,007 ft	226.45	ASPHALT	0 ft	95 ft
	60 m	2,745 m	236.71		0 m	29 m
05	197 ft	11,128 ft	46.39	ASPHALT	141 ft	141 ft
	60 m	3,392 m	56.65		43 m	43 m
23	197 ft	11,128 ft	226.41	ASPHALT	492 ft	141 ft
	60 m	3,392 m	236.67		150 m	43 m
15L	197 ft	11,061 ft	136.64	ASPHALT	0 ft	92 ft
	60 m	3,372 m	146.90		0 m	28 m
33R	197 ft	11,061 ft	316.66	ASPHALT	0 ft	89 ft
	60 m	3,372 m	326.92		0 m	27 m
15R	197 ft	9,097 ft	136.62	ASPHALT	597 ft	0 ft
	60 m	2,773 m	146.88		182 m	0 m
33L	197 ft	9,097 ft	316.64	ASPHALT	591 ft	0 ft
	60 m	2,773 m	326.90		180 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24L	DME	IIDP	111.95 MHz	18 nm	-	-	568 ft
				33 km	-		568 m
24R	DME	INV	109.30 MHz	18 nm	-	-	546 ft
				33 km	-		546 m
05	LOC-ILS	ITX	109.70 MHz	18 nm	46.40	-	564 ft
				33 km	56.66		564 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IJS	109.10 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
06R	LOC-ILS	ICV	111.95 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
15L	LOC-ILS	IRW	110.50 MHz	18 nm 33 km	136.65 146.91	-	564 ft 564 m
15R	LOC-ILS	ILP	110.95 MHz	18 nm 33 km	136.63 146.89	-	564 ft 564 m
23	LOC-ILS	IYZ	111.50 MHz	18 nm 33 km	226.40 236.66	-	564 ft 564 m
24L	LOC-ILS	IDP	111.95 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
24R	LOC-ILS	INV	109.30 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
33L	LOC-ILS	ITO	110.95 MHz	18 nm 33 km	316.63 326.89	-	564 ft 564 m
33R	LOC-ILS	ILE	110.30 MHz	18 nm 33 km	316.65 326.91	-	564 ft 564 m
05	GS	ITX	109.70 MHz	10 nm 19 km	46.40 56.66	3.00	564 ft 564 m
06L	GS	IJS	109.10 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
06R	GS	ICV	111.95 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
15L	GS	IRW	110.50 MHz	10 nm 19 km	136.65 146.91	3.00	564 ft 564 m
15R	GS	ILP	110.95 MHz	10 nm 19 km	136.63 146.89	3.00	564 ft 564 m
23	GS	IYZ	111.50 MHz	10 nm 19 km	226.40 236.66	3.00	564 ft 564 m
24L	GS	IIDP	111.95 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
24R	GS	INV	109.30 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
33L	GS	ITO	110.95 MHz	10 nm 19 km	316.63 326.89	3.00	564 ft 564 m
33R	GS	ILE	110.30 MHz	10 nm 19 km	316.65 326.91	3.00	564 ft 564 m