


2024/05/23 0237Z

KSEA ZAXUL **Q148** WEDAK **Q152** ONL KSCB

1150.73 nm / 2131.15 km

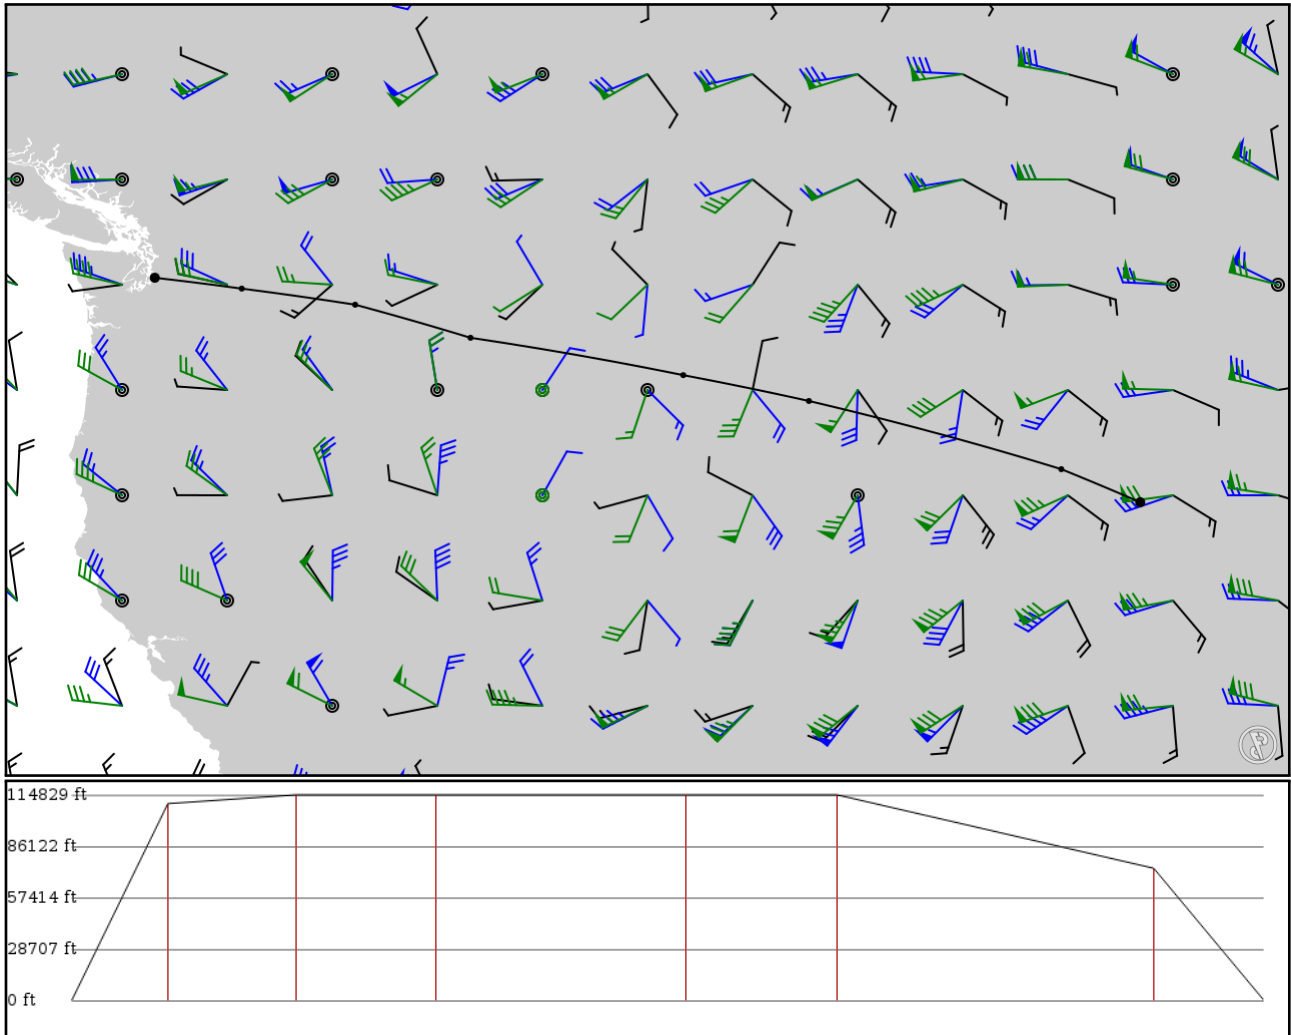

## Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

## Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
KSEA APT	-	47.45020 -122.31200	0 ft 0 m	-	Seattle Tacoma Intl
ZAXUL FIX	-	47.16740 -120.04500	33,500 ft 10,211 m	93	-
FINUT FIX	Q148 AWY-HI	46.74900 -117.08900	35,000 ft 10,668 m	123	-
WEDAK FIX	Q148 AWY-HI	45.88830 -114.08400	35,000 ft 10,668 m	134	-
IKFOM FIX	Q152 AWY-HI	44.91650 -108.53900	35,000 ft 10,668 m	240	-
WUVUT FIX	Q152 AWY-HI	44.24430 -105.26500	35,000 ft 10,668 m	145	-
ONL VOR	Q152 AWY-HI	42.47050 -98.68690	22,500 ft 6,858 m	306	O'NEILL
KSCB APT	-	41.60990 -96.63070	0 ft 0 m	105	SCRIBNER STATE

## KSEA

Region: UNITED STATES  
Timezone: AMERICA/LOS\_ANGELES  
Runways: 3

Elevation: 432 ft / 132 m  
Location: 47.450200 -122.312000  
Magnetic Var: 14.769 E

## METAR

KSEA 230153Z 28005KT 10SM FEW039 BKN070 BKN250 14/05 A3004 RMK A02 SLP177 T01390050

## TAF

TAF KSEA 222326Z 2300/2406 34010KT P6SM SCT030 BKN060 FM230200 VRB04KT P6SM SCT030 BKN060 FM230500 20004KT P6SM B

## Frequencies

REC - 118.00 MHz - SEATTLE ATIS  
GND - 121.70 MHz - SEATTLE GROUND  
TWR - 120.95 MHz - SEATTLE TOWER  
DEP - 120.10 MHz - SEATTLE DEPARTURE  
CLD - 128.00 MHz - SEATTLE CLEARANCE  
TWR - 119.90 MHz - SEATTLE TOWER  
APP - 133.65 MHz - SEATTLE APPROACH

## Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16L	151 ft	11,904 ft	180.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	165.58		0 m	122 m
34R	151 ft	11,904 ft	0.35	CONCRETE	0 ft	400 ft
	46 m	3,628 m	345.58		0 m	122 m
16C	151 ft	9,428 ft	180.34	CONCRETE	0 ft	400 ft
	46 m	2,874 m	165.57		0 m	122 m
34C	151 ft	9,428 ft	0.34	CONCRETE	0 ft	397 ft
	46 m	2,874 m	345.57		0 m	121 m
16R	151 ft	8,502 ft	180.34	CONCRETE	0 ft	200 ft
	46 m	2,591 m	165.57		0 m	61 m
34L	151 ft	8,502 ft	0.34	CONCRETE	0 ft	197 ft
	46 m	2,591 m	345.57		0 m	60 m

## Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
16C	DME	ISZI	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
16L	DME	ISNQ	110.30 MHz	18 nm	-	-	369 ft
				33 km	-		369 m
16R	DME	ICJL	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34C	DME	ITUC	111.70 MHz	18 nm	-	-	470 ft
				33 km	-		470 m
34L	DME	IB EJ	110.75 MHz	18 nm	-	-	410 ft
				33 km	-		410 m
34R	DME	ISEA	110.30 MHz	18 nm	-	-	469 ft
				33 km	-		469 m
16C	LOC-ILS	ISZI	111.70 MHz	18 nm	180.34	-	355 ft
				33 km	165.57		355 m
16L	LOC-ILS	ISNQ	110.30 MHz	18 nm	180.34	-	338 ft
				33 km	165.57		338 m
16R	LOC-ILS	ICJL	110.75 MHz	18 nm	180.34	-	410 ft
				33 km	165.57		410 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
34C	LOC-ILS	ITUC	111.70 MHz	18 nm	0.34	-	422 ft
				33 km	345.57		422 m
34L	LOC-ILS	IBEJ	110.75 MHz	18 nm	0.34	-	433 ft
				33 km	345.57		433 m
34R	LOC-ILS	ISEA	110.30 MHz	18 nm	0.34	-	428 ft
				33 km	345.57		428 m
16C	GS	ISZI	111.70 MHz	10 nm	180.67	3.00	418 ft
				19 km	165.90		418 m
16L	GS	ISNQ	110.30 MHz	10 nm	180.69	3.00	425 ft
				19 km	165.92		425 m
16R	GS	ICJL	110.75 MHz	10 nm	180.67	3.00	410 ft
				19 km	165.90		410 m
34C	GS	ITUC	111.70 MHz	10 nm	0.67	3.00	367 ft
				19 km	345.90		367 m
34L	GS	IBEJ	110.75 MHz	10 nm	0.67	3.00	360 ft
				19 km	345.90		360 m
34R	GS	ISEA	110.30 MHz	10 nm	0.69	2.75	355 ft
				19 km	345.92		355 m