

CYYZ

Toronto Pearson Intl


KEWR

Newark Liberty Intl

2024/05/12 2251Z

CYYZ BURST **V36** ULW **V147** LACIE KEWR

303.34 nm / 561.79 km

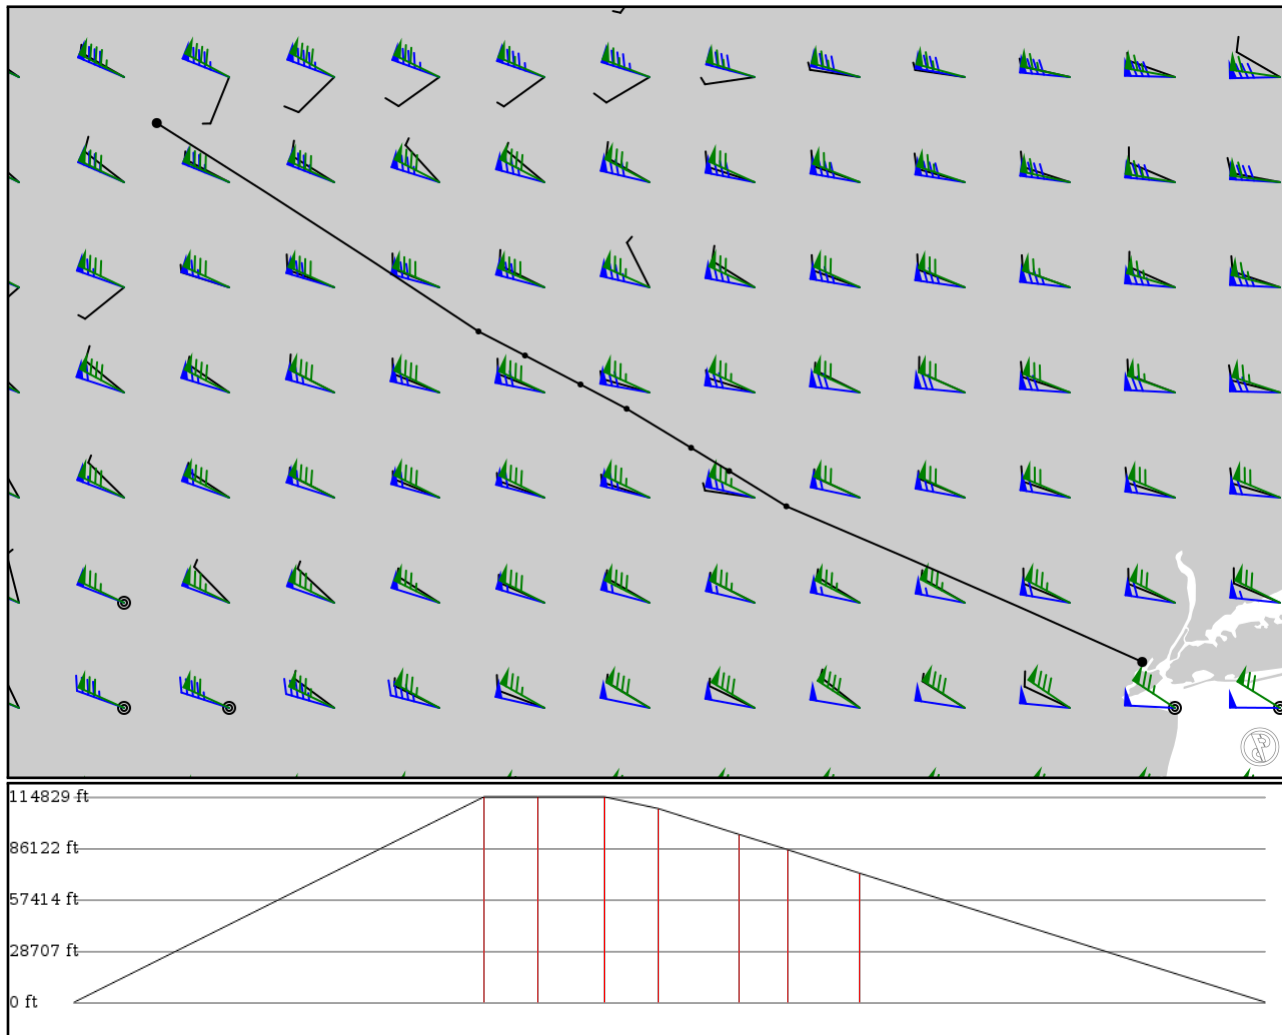

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
CYYZ APT	-	43.67610 -79.62770	0 ft 0 m	-	Toronto Pearson Intl
BURST FIX	-	42.52230 -77.84540	35,000 ft 10,668 m	104	-
HORNE FIX	V36 AWY-LO	42.38920 -77.58780	35,000 ft 10,668 m	13	-
THINK FIX	V36 AWY-LO	42.22870 -77.28030	35,000 ft 10,668 m	16	-
ULW VOR	V36 AWY-LO	42.09420 -77.02480	33,000 ft 10,058 m	13	ELMIRA
BIPOD FIX	V147 AWY-LO	41.87820 -76.66780	28,600 ft 8,717 m	20	-
TWIIN FIX	V147 AWY-LO	41.74940 -76.45700	26,000 ft 7,925 m	12	-
LACIE FIX	V147 AWY-LO	41.55420 -76.14010	22,000 ft 6,706 m	18	-
KEWR APT	-	40.69250 -74.16870	0 ft 0 m	103	Newark Liberty Intl

CYYZ

Region: CANADA
Timezone: AMERICA/TORONTO
Runways: 5

Elevation: 564 ft / 172 m
Location: 43.676100 -79.627700
Magnetic Var: 10.261 W

METAR

CYYZ 122200Z CCA 24007KT 15SM SCT055 BKN080 BKN170 18/06 A2986 RMK CU4AC2AC1 AC TR SLP113 DENSITY ALT 1200FT

TAF

TAF CYYZ 122040Z 1221/1324 25007KT P6SM SCT050 TEMPO 1221/1224 BKN050 BECMG 1221/1222 16008KT FM130200 22005KT P6

Frequencies

TWR - 118.35 MHz - TORONTO TOWER
GND - 119.10 MHz - TORONTO GROUND
GND - 121.90 MHz - TORONTO GROUND
REC - 133.10 MHz - ATIS
APP - 132.80 MHz - TORONTO APPROACH
APP - 125.40 MHz - TORONTO APPROACH
DEP - 127.57 MHz - TORONTO DEPARTURE

TWR - 118.70 MHz - TORONTO TOWER
GND - 121.65 MHz - TORONTO GROUND
REC - 120.82 MHz - ATIS
CLD - 121.30 MHz - CLEARANCE DELIVERY
APP - 124.47 MHz - TORONTO APPROACH
APP - 123.27 MHz - LONDON RADIO
DEP - 128.80 MHz - TORONTO DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
06L	197 ft	9,707 ft	46.43	ASPHALT	0 ft	131 ft
	60 m	2,959 m	56.69		0 m	40 m
24R	197 ft	9,707 ft	226.45	ASPHALT	194 ft	98 ft
	60 m	2,959 m	236.71		59 m	30 m
06R	197 ft	9,007 ft	46.43	ASPHALT	0 ft	95 ft
	60 m	2,745 m	56.69		0 m	29 m
24L	197 ft	9,007 ft	226.45	ASPHALT	0 ft	95 ft
	60 m	2,745 m	236.71		0 m	29 m
05	197 ft	11,128 ft	46.39	ASPHALT	141 ft	141 ft
	60 m	3,392 m	56.65		43 m	43 m
23	197 ft	11,128 ft	226.41	ASPHALT	492 ft	141 ft
	60 m	3,392 m	236.67		150 m	43 m
15L	197 ft	11,061 ft	136.64	ASPHALT	0 ft	92 ft
	60 m	3,372 m	146.90		0 m	28 m
33R	197 ft	11,061 ft	316.66	ASPHALT	0 ft	89 ft
	60 m	3,372 m	326.92		0 m	27 m
15R	197 ft	9,097 ft	136.62	ASPHALT	597 ft	0 ft
	60 m	2,773 m	146.88		182 m	0 m
33L	197 ft	9,097 ft	316.64	ASPHALT	591 ft	0 ft
	60 m	2,773 m	326.90		180 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
24L	DME	IIDP	111.95 MHz	18 nm	-	-	568 ft
				33 km	-		568 m
24R	DME	INV	109.30 MHz	18 nm	-	-	546 ft
				33 km	-		546 m
05	LOC-ILS	ITX	109.70 MHz	18 nm	46.40	-	564 ft
				33 km	56.66		564 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
06L	LOC-ILS	IJS	109.10 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
06R	LOC-ILS	ICV	111.95 MHz	18 nm 33 km	46.44 56.70	-	564 ft 564 m
15L	LOC-ILS	IRW	110.50 MHz	18 nm 33 km	136.65 146.91	-	564 ft 564 m
15R	LOC-ILS	ILP	110.95 MHz	18 nm 33 km	136.63 146.89	-	564 ft 564 m
23	LOC-ILS	IYZ	111.50 MHz	18 nm 33 km	226.40 236.66	-	564 ft 564 m
24L	LOC-ILS	IDP	111.95 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
24R	LOC-ILS	INV	109.30 MHz	18 nm 33 km	226.44 236.70	-	564 ft 564 m
33L	LOC-ILS	ITO	110.95 MHz	18 nm 33 km	316.63 326.89	-	564 ft 564 m
33R	LOC-ILS	ILE	110.30 MHz	18 nm 33 km	316.65 326.91	-	564 ft 564 m
05	GS	ITX	109.70 MHz	10 nm 19 km	46.40 56.66	3.00	564 ft 564 m
06L	GS	IJS	109.10 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
06R	GS	ICV	111.95 MHz	10 nm 19 km	46.44 56.70	3.00	564 ft 564 m
15L	GS	IRW	110.50 MHz	10 nm 19 km	136.65 146.91	3.00	564 ft 564 m
15R	GS	ILP	110.95 MHz	10 nm 19 km	136.63 146.89	3.00	564 ft 564 m
23	GS	IYZ	111.50 MHz	10 nm 19 km	226.40 236.66	3.00	564 ft 564 m
24L	GS	IIDP	111.95 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
24R	GS	INV	109.30 MHz	10 nm 19 km	226.44 236.70	3.00	564 ft 564 m
33L	GS	ITO	110.95 MHz	10 nm 19 km	316.63 326.89	3.00	564 ft 564 m
33R	GS	ILE	110.30 MHz	10 nm 19 km	316.65 326.91	3.00	564 ft 564 m

KEWR

Region: UNITED STATES
Timezone: AMERICA/NEW_YORK
Runways: 3

Elevation: 17 ft / 5 m
Location: 40.693600 -74.168600
Magnetic Var: 12.651 W

METAR

KEWR 122151Z 17005KT 10SM FEW028 BKN033 BKN100 BKN220 13/07 A2994 RMK A02 SLP138 T01330072 \$

TAF

KEWR 122059Z 1221/1324 15004KT P6SM BKN025 FM122200 18006KT P6SM SCT025 BKN035 FM130000 21004KT P6SM FEW020 BKN100

Frequencies

REC - 115.70 MHz - D-ATIS	REC - 134.82 MHz - D-ATIS
COM - 122.95 MHz - UNICOM	CLD - 118.85 MHz - CLEARANCE DELIVERY
GND - 121.80 MHz - NEWARK GROUND	GND - 126.15 MHz - NEWARK GROUND
GND - 132.45 MHz - RAMP CONTROL	TWR - 118.30 MHz - NEWARK TOWER
TWR - 134.05 MHz - NEWARK TOWER	APP - 127.60 MHz - NEW YORK APPROACH
APP - 128.55 MHz - NEW YORK APPROACH	APP - 132.70 MHz - NEW YORK APPROACH
APP - 132.80 MHz - NEW YORK APPROACH	DEP - 119.20 MHz - NEW YORK DEPARTURE

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
04L	150 ft	11,011 ft	25.75	ASPHALT	2,539 ft	610 ft
	46 m	3,356 m	38.40		774 m	186 m
22R	150 ft	11,011 ft	205.76	ASPHALT	1,440 ft	0 ft
	46 m	3,356 m	218.41		439 m	0 m
04R	150 ft	10,009 ft	25.74	ASPHALT	1,191 ft	299 ft
	46 m	3,051 m	38.39		363 m	91 m
22L	150 ft	10,009 ft	205.75	ASPHALT	1,791 ft	0 ft
	46 m	3,051 m	218.40		546 m	0 m
11	150 ft	6,732 ft	95.00	ASPHALT	0 ft	505 ft
	46 m	2,052 m	107.65		0 m	154 m
29	150 ft	6,732 ft	275.02	ASPHALT	223 ft	0 ft
	46 m	2,052 m	287.67		68 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
04L	DME	IEWR	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04R	DME	IEZA	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22L	DME	ILSQ	108.70 MHz	18 nm	-	-	18 ft
				33 km	-		18 m
22R	DME	IJNN	110.75 MHz	18 nm	-	-	11 ft
				33 km	-		11 m
04L	LOC-ILS	IEWR	110.75 MHz	18 nm	25.76	-	17 ft
				33 km	38.41		17 m
04R	LOC-ILS	IEZA	108.70 MHz	18 nm	25.75	-	17 ft
				33 km	38.40		17 m
11	LOC-ILS	IGPR	109.15 MHz	18 nm	95.01	-	17 ft
				33 km	107.66		17 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
22L	LOC-ILS	ILSQ	108.70 MHz	18 nm	205.75	-	17 ft
				33 km	218.40		17 m
22R	LOC-ILS	IJNN	110.75 MHz	18 nm	205.76	-	17 ft
				33 km	218.41		17 m
04L	GS	IEWR	110.75 MHz	10 nm	25.76	3.00	17 ft
				19 km	38.41		17 m
04R	GS	IEZA	108.70 MHz	10 nm	25.75	3.00	17 ft
				19 km	38.40		17 m
11	GS	IGPR	109.15 MHz	10 nm	95.01	3.00	17 ft
				19 km	107.66		17 m
22L	GS	ILSQ	108.70 MHz	10 nm	205.75	3.00	17 ft
				19 km	218.40		17 m
22R	GS	IJNN	110.75 MHz	10 nm	205.76	3.00	17 ft
				19 km	218.41		17 m