

LOWW

Vienna Intl


LROP

Bucharest Henri Coanda

2024/05/12 1847Z

LOWW ALAMU INVED M747 ENIMA LROP

461.59 nm / 854.87 km

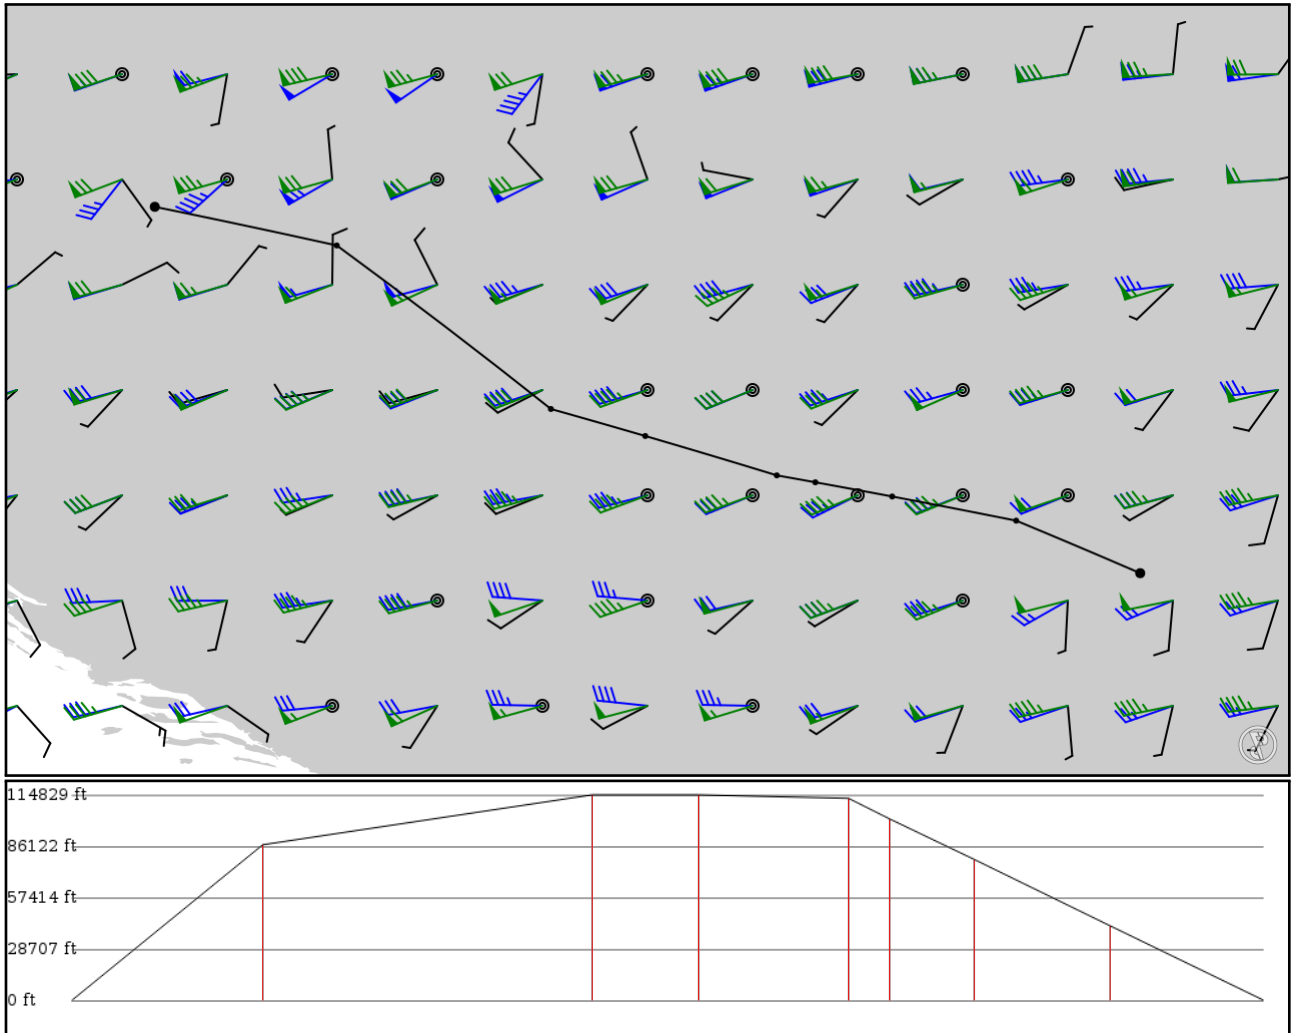

Notes

Basic altitude profile:

- Ascent Rate: 2500ft/min
- Ascent Speed: 250kts
- Cruise Altitude: 35000ft
- Cruise Speed: 420kts
- Descent Rate: 1500ft/min
- Descent Speed: 250kts

Options:

- Use NATs: yes
- Use PACOTS: yes
- Use low airways: yes
- Use high airways: yes

Route

Ident Type	Via	Lat Lon	Alt	Dist (nm)	Name
LOWW	-	48.11010	0 ft	-	Vienna Intl
APT	-	16.56960	0 m	-	
ALAMU	-	47.73690	26,500 ft	74	-
FIX	-	18.33000	8,077 m	-	-
INVED	-	46.15780	35,000 ft	127	-
FIX	-	20.40140	10,668 m	-	-
GITMU	M747	45.89690	35,000 ft	41	-
FIX	AWY-HI	21.31440	10,668 m	-	-
NEKUL	M747	45.51680	34,400 ft	58	-
FIX	AWY-HI	22.58680	10,485 m	-	-
AGNEP	M747	45.45000	30,900 ft	16	-
FIX	AWY-HI	22.95970	9,418 m	-	-
NERDI	M747	45.31280	24,000 ft	32	-
FIX	AWY-HI	23.70310	7,315 m	-	-
ENIMA	M747	45.07940	12,700 ft	52	-
FIX	AWY-HI	24.90250	3,871 m	-	-
LROP	-	44.57230	0 ft	59	Bucharest Henri Coanda
APT	-	26.10230	0 m	-	

LOWW

Region: AUSTRIA
Timezone: EUROPE/VIENNA
Runways: 2

Elevation: 600 ft / 183 m
Location: 48.110100 16.569600
Magnetic Var: 5.014 E

METAR

LOWW 121820Z 02004KT CAVOK 18/05 Q1018 NOSIG

TAF

TAF LOWW 121715Z 1218/1324 03005KT 9999 FEW050 TX21/1314Z TN10/1302Z BECMG 1300/1302 14012KT TEMPO 1308/1314 1501

Frequencies

REC - 122.95 MHz - ATIS ARRIVAL
TWR - 124.47 MHz - WIEN TOWER
TWR - 121.20 MHz - WIEN TOWER
GND - 121.77 MHz - WIEN GROUND
CLD - 122.12 MHz - CLEARANCE DELIVERY
APP - 125.17 MHz - WIEN RADAR
APP - 118.77 MHz - WIEN RADAR
APP - 119.80 MHz - WIEN DIRECTOR
REC - 118.52 MHz - WIEN INFORMATION

REC - 121.72 MHz - ATIS DEPARTURE
TWR - 123.80 MHz - WIEN TOWER
TWR - 119.40 MHz - WIEN TOWER
GND - 121.60 MHz - WIEN GROUND
APP - 134.67 MHz - WIEN RADAR
APP - 129.05 MHz - WIEN RADAR
APP - 136.25 MHz - WIEN RADAR
APP - 134.12 MHz - WIEN DIRECTOR

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
16	148 ft	11,822 ft	164.23	ASPHALT	0 ft	197 ft
	45 m	3,604 m	159.21		0 m	60 m
34	148 ft	11,822 ft	344.24	ASPHALT	0 ft	194 ft
	45 m	3,604 m	339.22		0 m	59 m
11	148 ft	11,495 ft	115.99	ASPHALT	0 ft	174 ft
	45 m	3,504 m	110.97		0 m	53 m
29	148 ft	11,495 ft	296.02	ASPHALT	0 ft	187 ft
	45 m	3,504 m	291.00		0 m	57 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
11	DME	OEW	110.30 MHz	18 nm	-	-	593 ft
				33 km	-		593 m
16	DME	O EZ	108.50 MHz	18 nm	-	-	610 ft
				33 km	-		610 m
29	DME	O EX	109.55 MHz	18 nm	-	-	624 ft
				33 km	-		624 m
34	DME	O EN	108.10 MHz	18 nm	-	-	572 ft
				33 km	-		572 m
11	LOC-ILS	OEW	110.30 MHz	18 nm	116.04	-	600 ft
				33 km	111.02		600 m
16	LOC-ILS	O EZ	108.50 MHz	18 nm	164.25	-	600 ft
				33 km	159.24		600 m
29	LOC-ILS	O EX	109.55 MHz	18 nm	295.98	-	600 ft
				33 km	290.96		600 m
34	LOC-ILS	O EN	108.10 MHz	18 nm	344.21	-	600 ft
				33 km	339.20		600 m

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
11	GS	OEW	110.30 MHz	10 nm	116.02	3.10	593 ft
				19 km	111.01		593 m
16	GS	OEZ	108.50 MHz	10 nm	164.47	3.00	610 ft
				19 km	159.46		610 m
29	GS	OEX	109.55 MHz	10 nm	296.02	3.00	624 ft
				19 km	291.01		624 m
34	GS	OEN	108.10 MHz	10 nm	344.47	3.00	604 ft
				19 km	339.46		604 m

LROP

Region: ROMANIA
Timezone: EUROPE/BUCHAREST
Runways: 2

Elevation: 313 ft / 95 m
Location: 44.572300 26.102300
Magnetic Var: 6.291 E

METAR

LROP 121830Z 04009KT 9999 -SHRA SCT050CB 10/08 Q1019 NOSIG

TAF

TAF LROP 121700Z 1218/1318 02012KT 9999 SCT050CB TEMPO 1218/1220 5000 -SHRA BECMG 1220/1222 VRB04KT 5000 BR BKN010

Frequencies

REC - 118.50 MHz - OTOPENI ATIS
TWR - 121.85 MHz - OTOPENI TWR

GND - 121.70 MHz - OTOPENI GND
APP - 118.25 MHz - BUCHAREST APP

Runways

Ident	Width	Length	Bearing (true) (mag)	Surface	Threshold Offset	Overrun Length
08R	148 ft	11,494 ft	83.90	ASPHALT	0 ft	0 ft
	45 m	3,503 m	77.61		0 m	0 m
26L	148 ft	11,494 ft	263.93	ASPHALT	0 ft	0 ft
	45 m	3,503 m	257.64		0 m	0 m
08L	148 ft	11,493 ft	83.91	ASPHALT	0 ft	0 ft
	45 m	3,503 m	77.61		0 m	0 m
26R	148 ft	11,493 ft	263.94	ASPHALT	0 ft	0 ft
	45 m	3,503 m	257.65		0 m	0 m

Approach Nav aids

Runway	Type	Ident	Frequency	Range	Bearing (true) (mag)	Slope	Elevation
08L	DME	ILL	110.90 MHz	18 nm	-	-	400 ft
				33 km	-		400 m
08R	DME	IOP	110.30 MHz	18 nm	-	-	400 ft
				33 km	-		400 m
26L	DME	IOE	109.10 MHz	18 nm	-	-	314 ft
				33 km	-		314 m
26R	DME	IRR	110.70 MHz	18 nm	-	-	400 ft
				33 km	-		400 m
08L	LOC-ILS	ILL	110.90 MHz	18 nm	83.74	-	314 ft
				33 km	77.45		314 m
08R	LOC-ILS	IOP	110.30 MHz	18 nm	83.74	-	303 ft
				33 km	77.45		303 m
26L	LOC-ILS	IOE	109.10 MHz	18 nm	264.11	-	314 ft
				33 km	257.82		314 m
26R	LOC-ILS	IRR	110.70 MHz	18 nm	264.12	-	314 ft
				33 km	257.83		314 m
08L	GS	ILL	110.90 MHz	10 nm	84.84	3.00	314 ft
				19 km	78.55		314 m
08R	GS	IOP	110.30 MHz	10 nm	84.81	2.70	314 ft
				19 km	78.52		314 m
26L	GS	IOE	109.10 MHz	10 nm	264.81	2.70	303 ft
				19 km	258.52		303 m
26R	GS	IRR	110.70 MHz	10 nm	264.84	3.00	314 ft
				19 km	258.55		314 m